



New possibilities in metrology



MQ
Series
Metrology
Solutions

2023

**Main
catalog**

08/2023 | EN

Position and measure without reclamping,
efficiently and close to production

 **LEHMANN®**

Swiss precision technology

Today, pL LEHMANN is still a family-owned and managed company in the hands of the second generation and present in over 20 countries (see the back of this catalog).

The company is committed to typical Swiss values: ...

- Depth of manufacturing – over 90% developed and manufactured in-house
- Product quality – reliable, durable, safe
- High-tech – Industry 4.0-compatible, ready to be automated
- Innovation – in tune with the times, adaptable, trendsetting
- Sustainability – long-term approach to business, environmentally conscious
- Basic values – honest, correct, fair



* Sales and service partners trained and equipped by pL (VAR – value added resellers or VAP – value added partners)

For more information, see
www.lehmann-rotary-tables.com

... and specialized in rotary tables for over 40 years:

- 1960 Founding – Contract manufacturing
- 1973 Conversion into a stock corporation
- 1974 Introduction of the first numerically controlled rotary tables (HUST)
- 1980 Construction of new factory building
- 1986 Development of the Series 400
- 1988 2nd generation joins management
- 1997 Construction of new assembly building
- 2000 Development of the 800 series (direct drive up to 10,000 rpm)
- 2002 2nd generation assumes management responsibility
- 2003 Development of the 700 series (direct drive up to 800 rpm)
- 2008 Addition of office building
- 2010 Development of the Series 500
- 2011 Start of internationalization / lean production
- 2013 Development of the high-speed version of Series 500
- 2016 Expansion of factory building
- 2019 Introduction of the Series 900 DD up to 5,450 rpm and market launch of AM-LOCK, as well as the development and introduction of the AM-SHAFT construction shaft concept
- 2022 Presentation of Q-Line, market launch in metrology
Market launch of P-Line for simple positioning tasks

Other pL products

CNC rotary tables classic



Main catalog – Series 500

CNC rotary tables direct drive



Main catalog – Series 900

Produce and measure economically:
Manufacturing and metrology are moving
closer together



Target market	4
Applications	6
Application questions	10
Product overviews	12




Technology from the inside	20
Technology from the outside	22
smart doc	24
pL-Service	26



Q-Line MA-Q08 and EA-Q08	30
QuickMover & QuickBar	34
QuickControl / PC-CNC control system	35
M-Line EA-Mxx and Tx-Mxx	36



Counterbearing, hydraulic unit, tailstocks	42
Clamping cylinder	44
Rotary union	46
Motors, cables, direct measuring systems	48



Geometry accuracies	50
Stress test to ISO 10 360	52
Spindle loads	58
Technical explanations	60



Accessory system	65
ripas palletizing system, HSK clamping systems	66
AM-LOCK	68
Ideal clamping devices for metrology	69
Other workpiece clamping systems	70
ROTOМАTION	96

Overview &
ApplicationsSystem,
FacilitiesQ-Line & M-Line
Rotary TablesSPZ, DDF, RST
GLA, WMS, MOT, KABTolerances
Technology & Glossary

Tooling


The trend is obvious: Metrology is shifting from the measurement laboratory to production – post-line or in-line



A wide range of workpieces can be measured precisely and efficiently both vertically and horizontally thanks to heavy-duty CNC rotary tables, ideally with zero point clamping.

The measuring process is thus determined by the cycle time of the production machine.

Methods that have long proven themselves in production are needed. pL LEHMANN offers them.

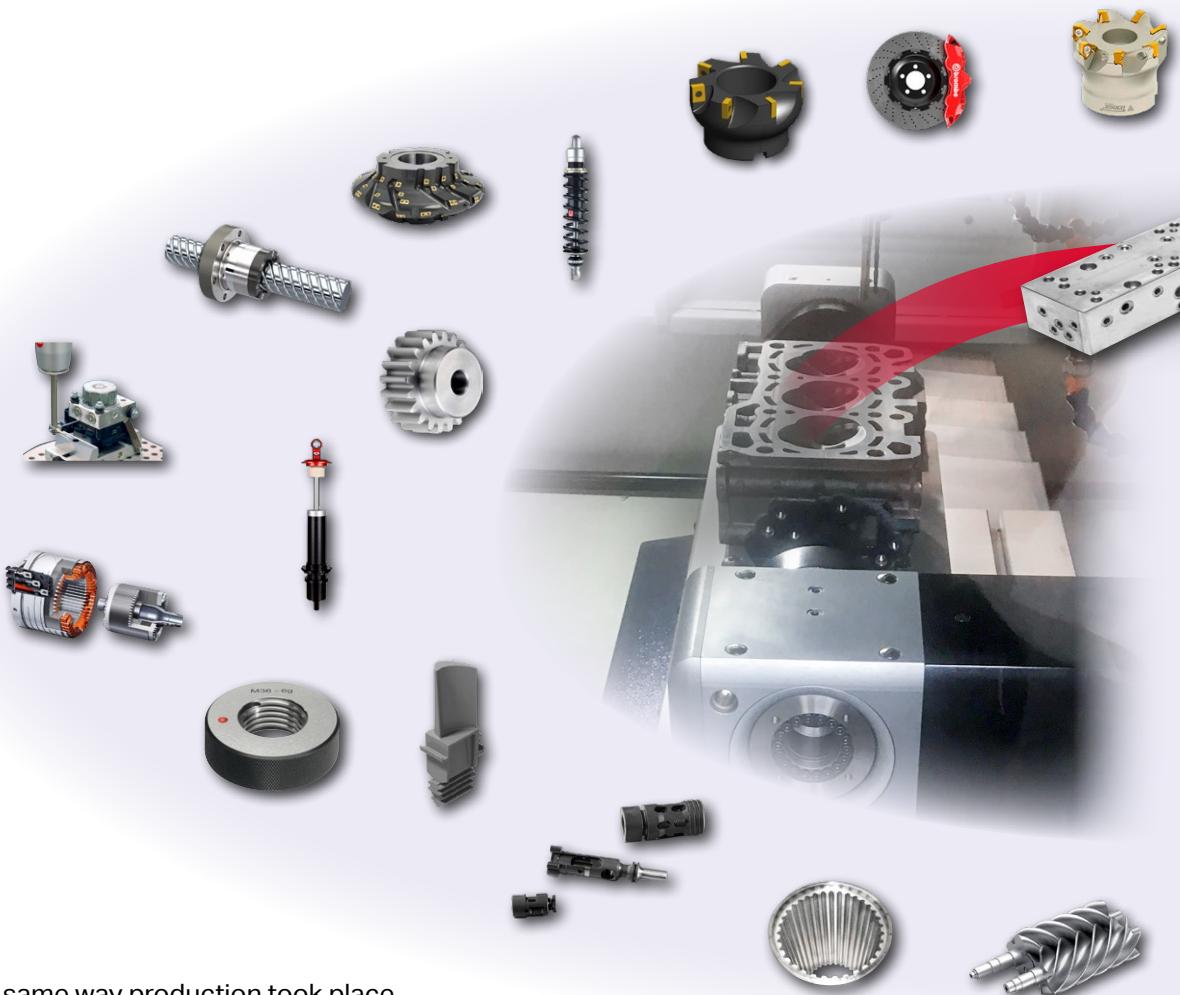

Goal

- Measure in the same way production took place
- Without loss of the reference point
- Maximum benefit with minimum investment

Result


- More precise
- More efficient

From the machining center directly to the measuring machine



ONE measuring machine for (almost) ALL applications

- Easier for the machine operator
- Less space required
- More economical
- Greater time savings

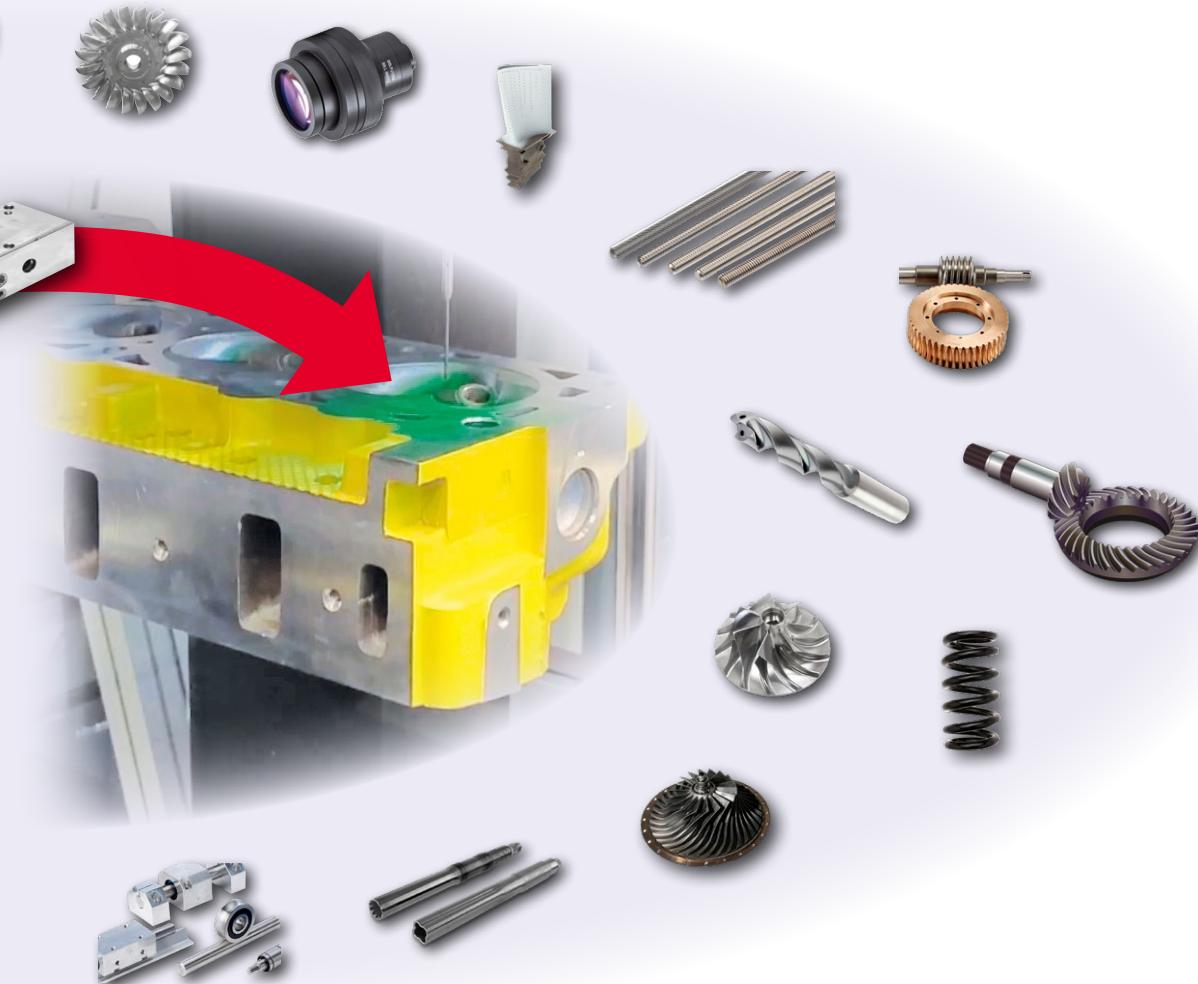

Need for new technologies



H-mobility
Hydrogen-powered
vehicles (hydrogen
fuel cells)



E-mobility
Electric vehicles



Robotics
Automation and
autonomy



Energy efficiency
Environmental and
health protection

Impression 1 - Q-Line in use


Measured on an ingenious 3D testing device from RENISHAW:
EQUATOR 500 EH with insight rotary table



EA-Q08 in use for fully automatic measurement of a series part with zero point clamping from SCHUNK

Impression 2 - Q-Line in use

Contour and surface measurement of a shaft

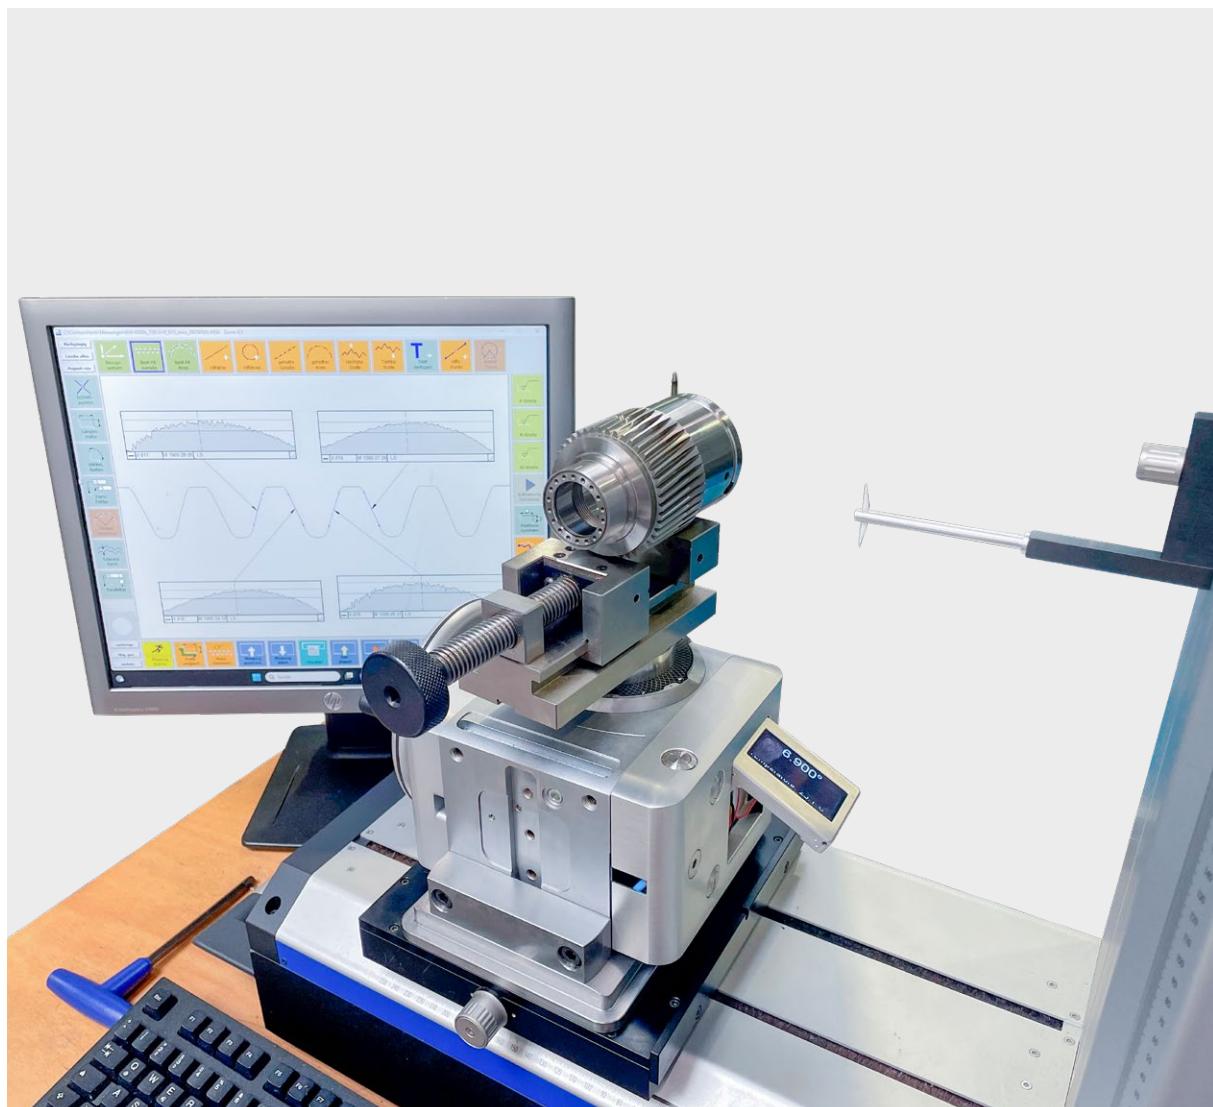

MA-Q08 vertical in use for spline measurement

Impression 3 - M-Line in use


Measuring complex workpieces with 5 axes



TF-M07M10 on a WERT Scope-Check in use for measuring a turbine blade

Impression 4 - Q-Line in use

Angle, slot, surface and bore measurement of a complex, 5-sided machined workpiece in one set-up

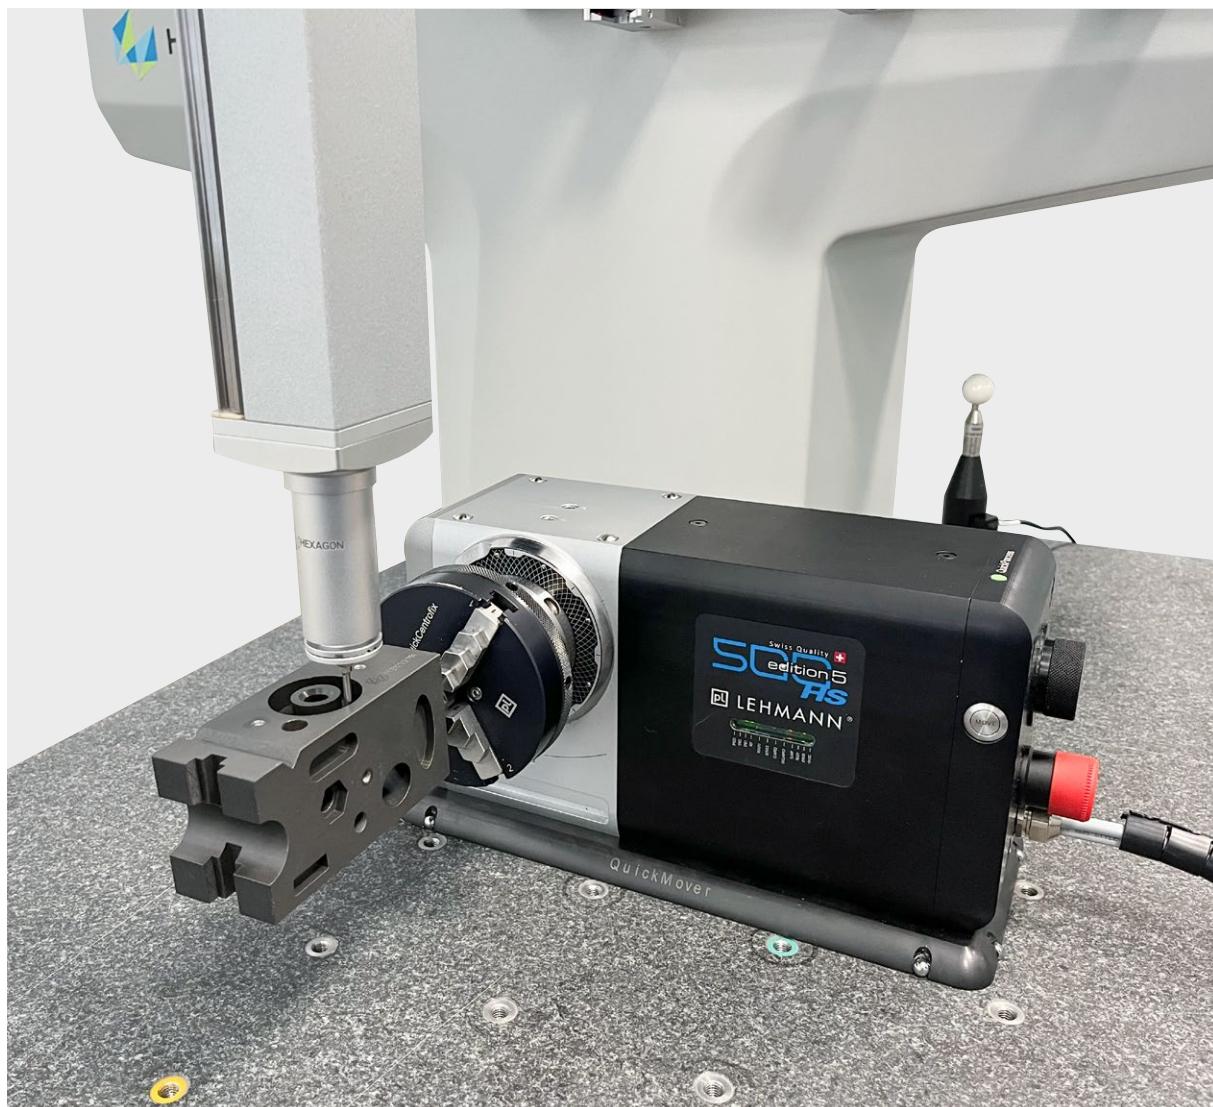

Fully automatic measurement via I/O interface or QuickProcess

Swivel the stylus or workpiece?

There are good reasons why, in many cases, it is better to swivel the workpiece ...



Rotate workpieces ...

- Positioning and scanning
- High repeatability
- Also measure horizontally
- Great degree of freedom
- Difficult workpieces
- Can be automated
- Can be retrofitted
- Much faster than with rotary switch

- Positioning the measuring point
- Also for surface measurements
- Also in space

... Instead of rotary switch

Benefits

- Workpiece does not need to be reclamped
- Multiple clamping solutions no longer necessary
- Horizontal scanning possible – long workpieces
- Be able to measure undercuts
- Fast and universal
- Positioning accuracy up to ± 1 arcsec

Disadvantage

- Movement of a larger mass

Common clamping devices

- Large assortment available as standard
- No complicated measuring devices
- Highly efficient zero point clamping
- Supports inline measurements (close to production)
- No training for the machine operator

- For measurements of all kinds
- Also suitable for automation




For M-Line:

Automation made easy! pL LEHMANN rotary and tilting axes have already been equipped with an iBox – so they are prepared for implementation in Industry 4.0

The solution

4th and 4th/5th axis with high-precision rolling bearing technology, away from air bearing support, also for large loads in all positions

Solution with 4th axis

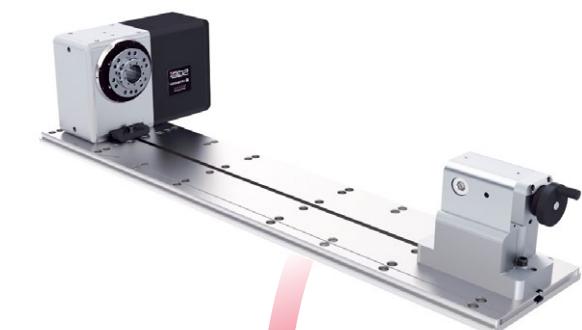

Solution with 4th/5th axis



workpiece to be measured, e.g. watch case

Change in 20 sec. – and the process continues fully automatically

Quick change device

Overview & Applications

System, Facts & Service

Q-Line & M-Line
Rotary Tables

SPZ, DDF, RST
GLA, WMS, MOT, KAB

Tolerances
Technology & Glossary

Tooling

High value retention: can be modified at any time,
only 4 sizes ø100 – 500 mm – over 290 standard
configurations

EA → TF TIP



Diversity of products


unique

- Wide range of applications for each size
- Lower storage costs, also in service (spare parts)
- Increased sales and service productivity

EA → EA with rotoFIX



EA → EA with longFLEX

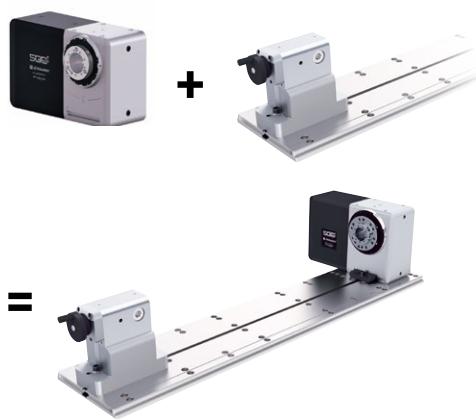

Attention! Due to export control regulations, the conversion will be carried out at headquarters only.

Standard machine in stock, available at short notice,
equipped with matching rotary table

Highest level of flexibility 

- Rotary table is available quickly and can be converted at any time
- If needs change, the investment is not wasted
- Pay in installments: First the machine, later the rotary table - can be retrofitted at any time



TF TIP → T1 TAP



TF TIP → T1 TOP




T1 TAP → T1 TOP




- Positioning accuracy up to ± 1 arcsec
- Up to 12 channels on rotary axis or clamping yoke
- Medium: Oil, air or vacuum, up to 250 bar
- Many standard combinations

E-Series

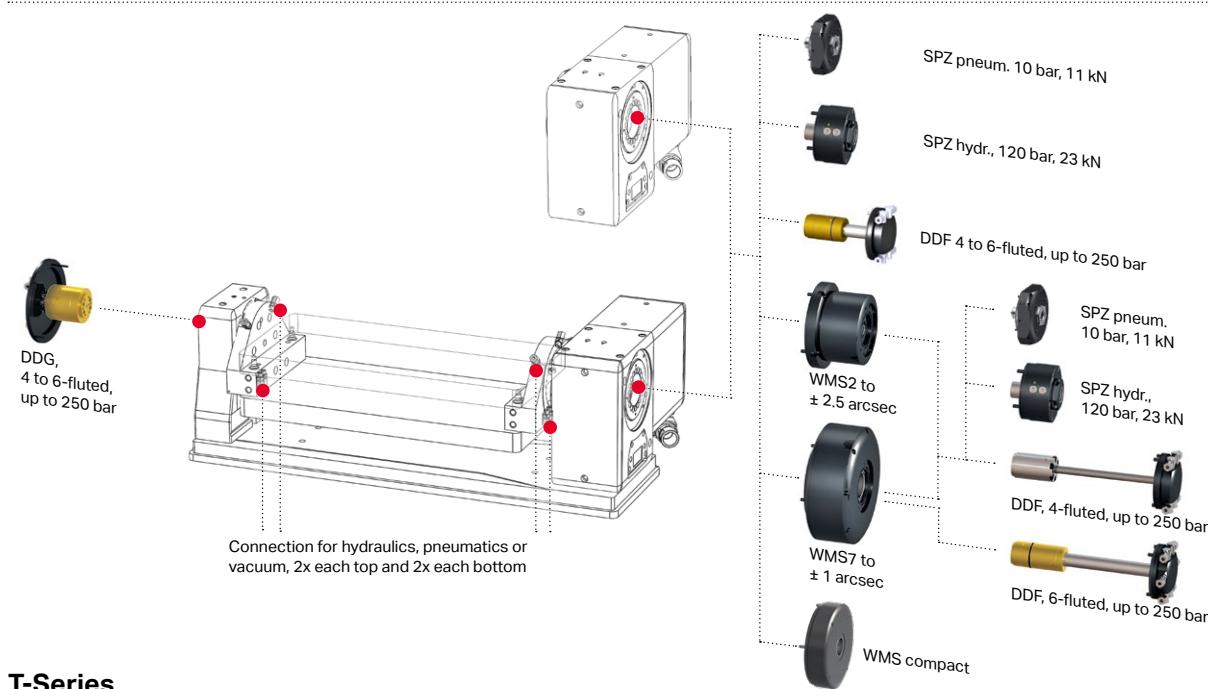


T-Series

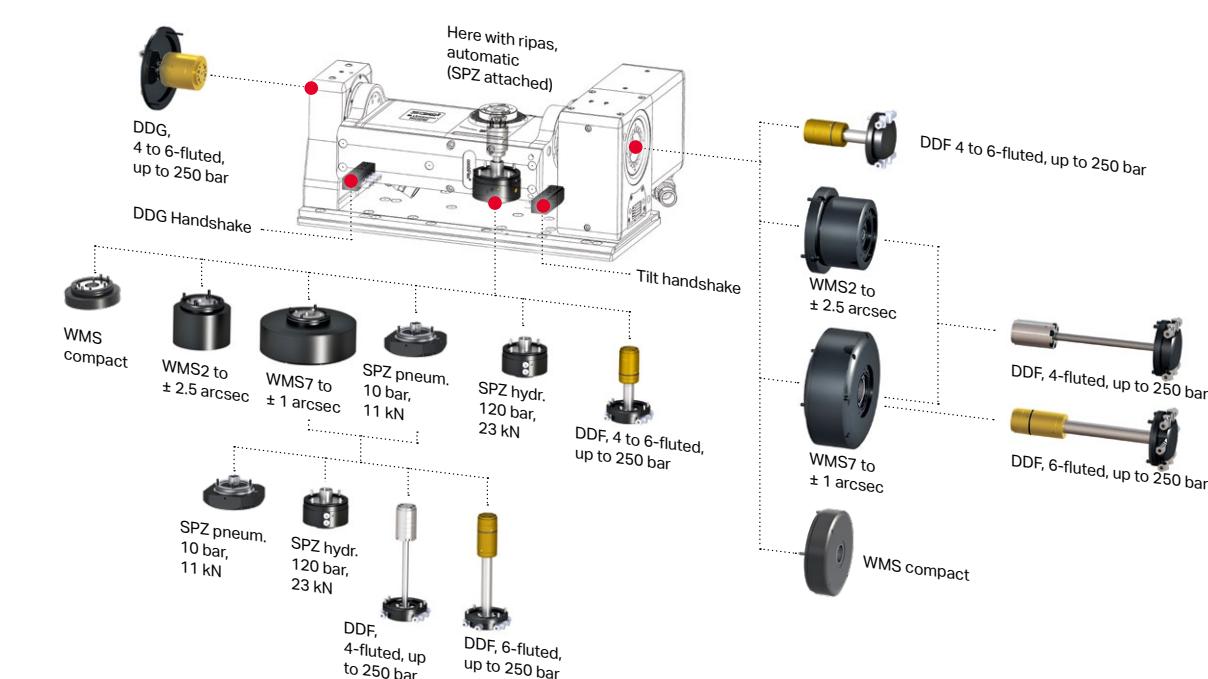


- Rotary union in combination with angle measuring systems small and large
- Easy to retrofit
- Clamping cylinder up to 23 kN

M-Series

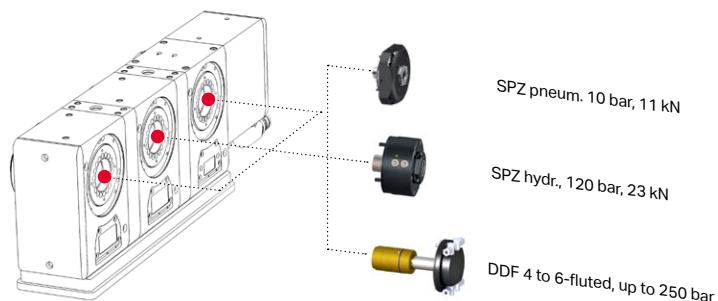

T2 to T3-Series

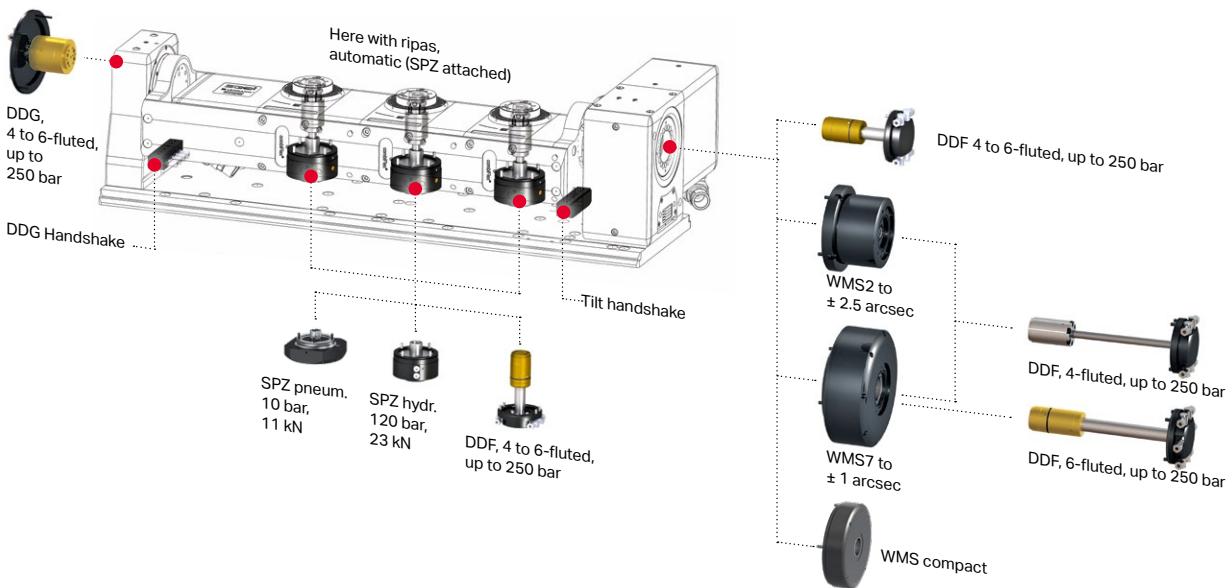

Note

1. DDF 6-fluted not possible on
 - 507 and 508
 - Small counterbearing (TOP1)
 - 510 with rotoFIX
2. WMS7 not possible on 507 and 508
3. SPZ (stroke = 15 mm) not possible in combination with WMS2


WMS Direct measuring system
 2 = Size 2000, Heidenhain,
 Magnehite
 7 = Size 8000, Heidenhain
 DDF Rotary union on rotary table

DDG Rotary union for counterbearing
 4 = 4 channels
 6 = 6 channels
 SPZ Clamping cylinders
 MTS Modular tooling system


For any center height increases due to the respective spindle accessories, see p. 45.

Possibilities of clamping yokes with integrated or attached zero point clamping system

Bridge with manual zero point clamping system

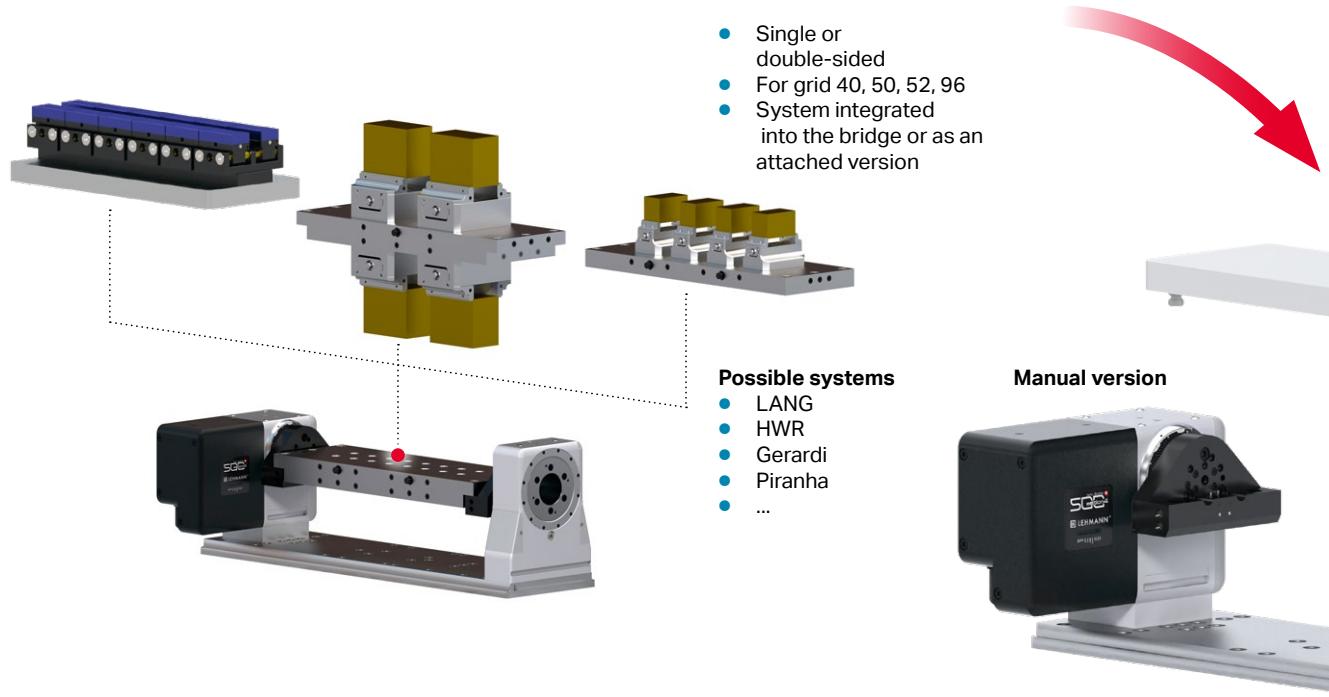


Bridge with automatic zero point clamping system

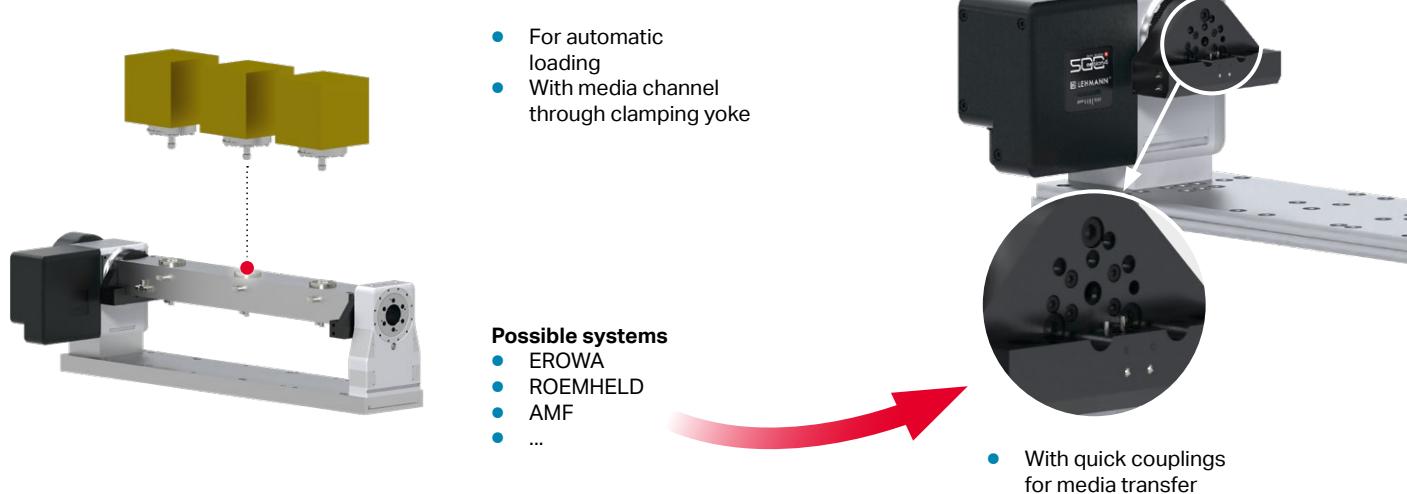

Clamping yokes with hole pattern for individual mounting of clamping devices or with a flexibly adjustable rail system

Bridge with rail system

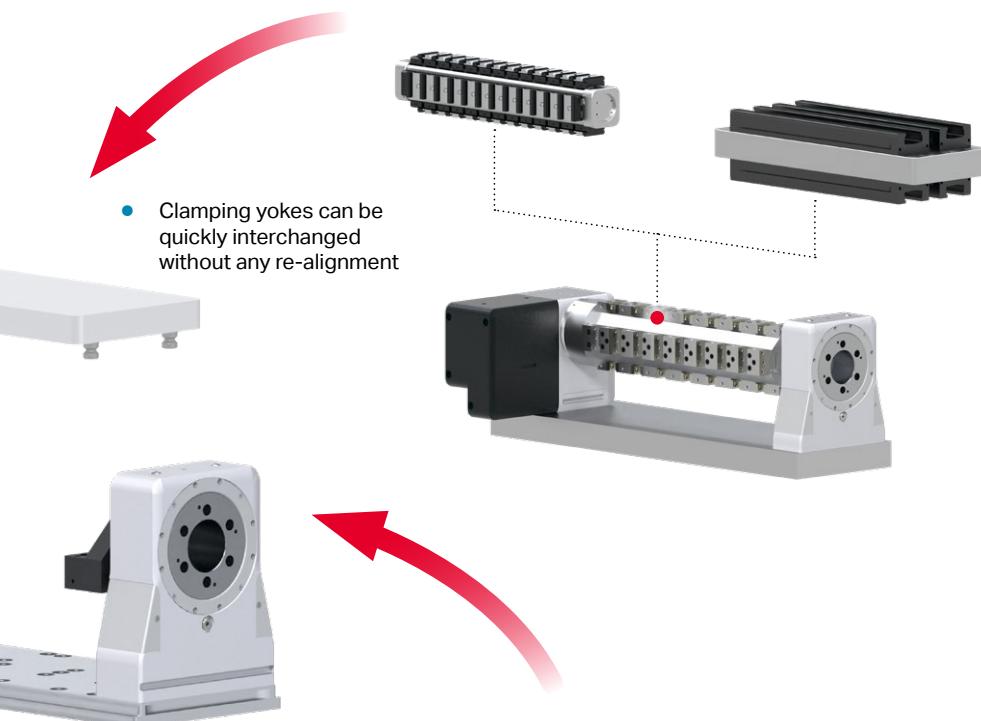


- Vises can be moved without any re-alignment
- Easily adaptable to part size

Possible systems

- SCHUNK
- TRIAG
- EVARD
- ...

Bridge with bolted on clamping devices (manual or automatic)

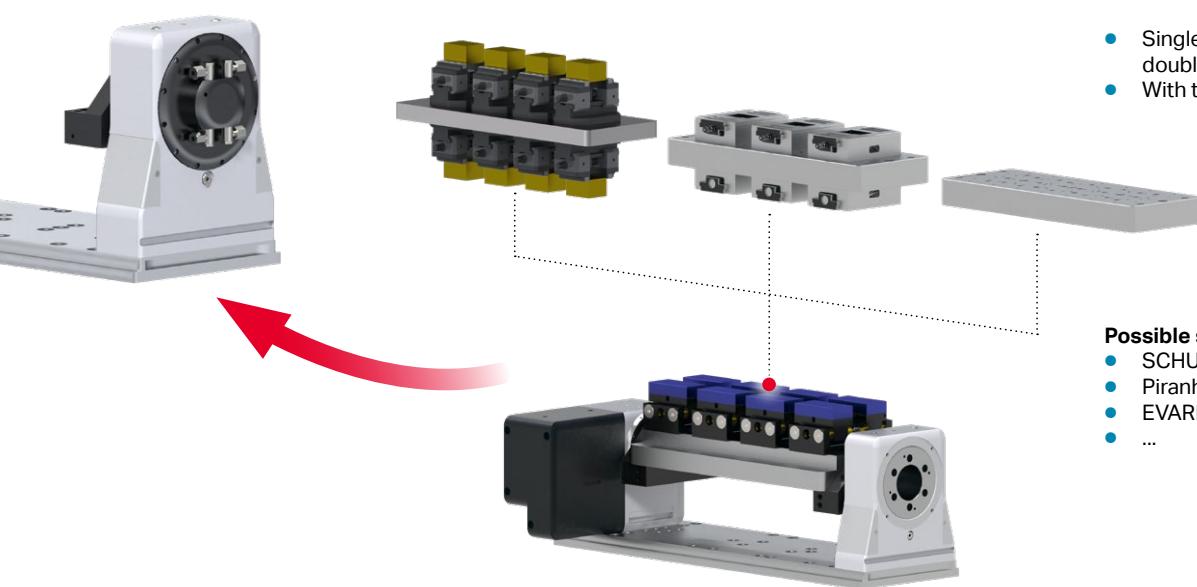


- Single or double-sided
- With tapped hole pattern

Possible systems


- SCHUNK
- Piranha
- EVARD
- ...

From manual clamping devices for single-piece production through to fully automated systems



Spindle extension:
to accommodate all
manual and automatic
clamping systems, but
HSK man+auto not
possible

Face plates, force clamp and jaw chucks, collet chucks

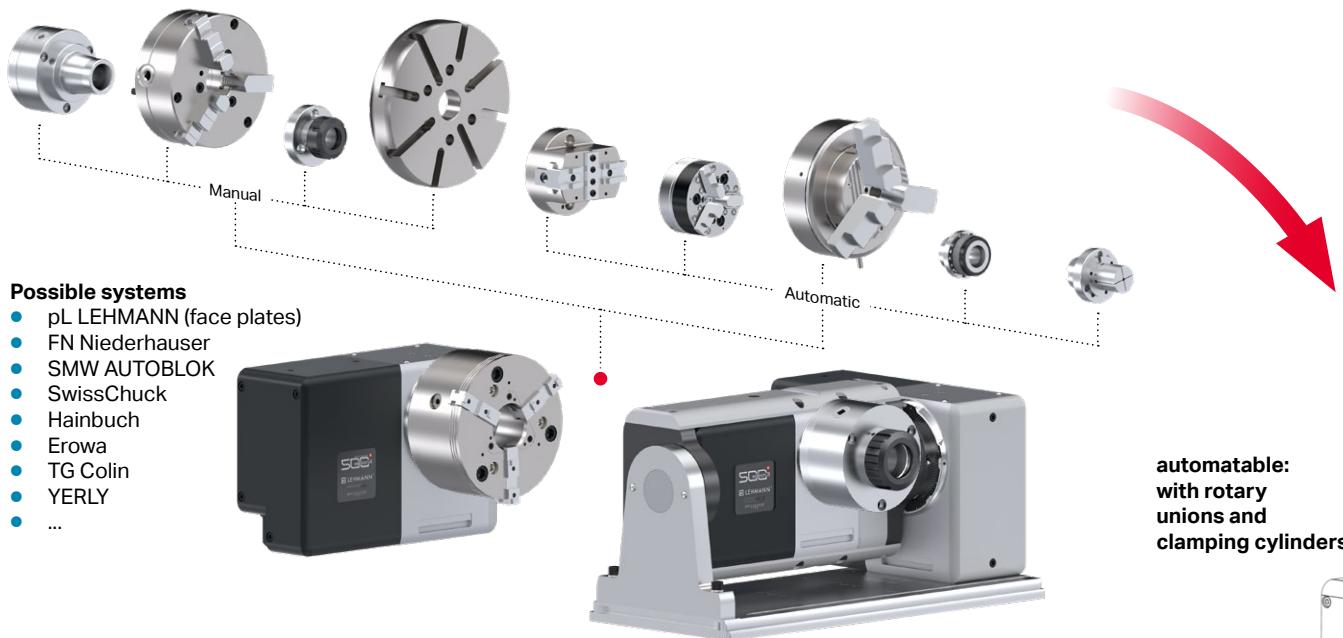


Centric clamping unit



Possible systems

- SCHUNK
- LANG
- Gressel
- Piranha Clamp
- EVARD
- TRIAG
- ...

Zero point clamping systems

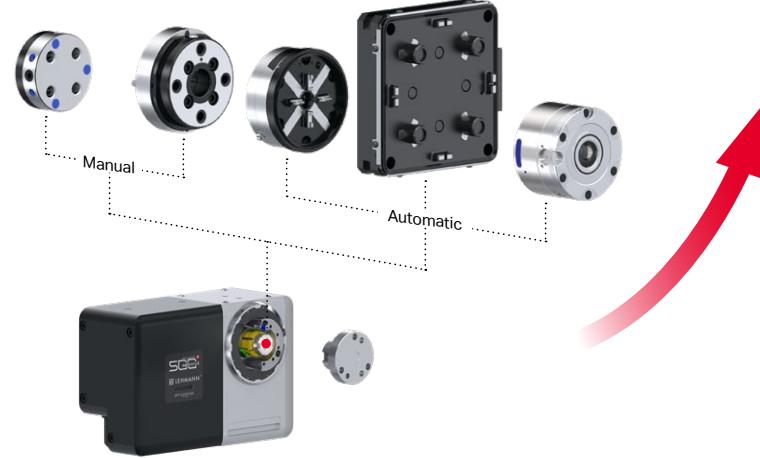


Possible systems

- pL LEHMANN (ripas & CAPTO)
- Erowa
- System 3R
- Parotec
- Roemheld
- AMF
- SCHUNK
- LANG
- GRESSEL
- ...

Centering clamping unit for workpiece handling,
attached zero point clamping system for
quick vise interchange

Possible combinations

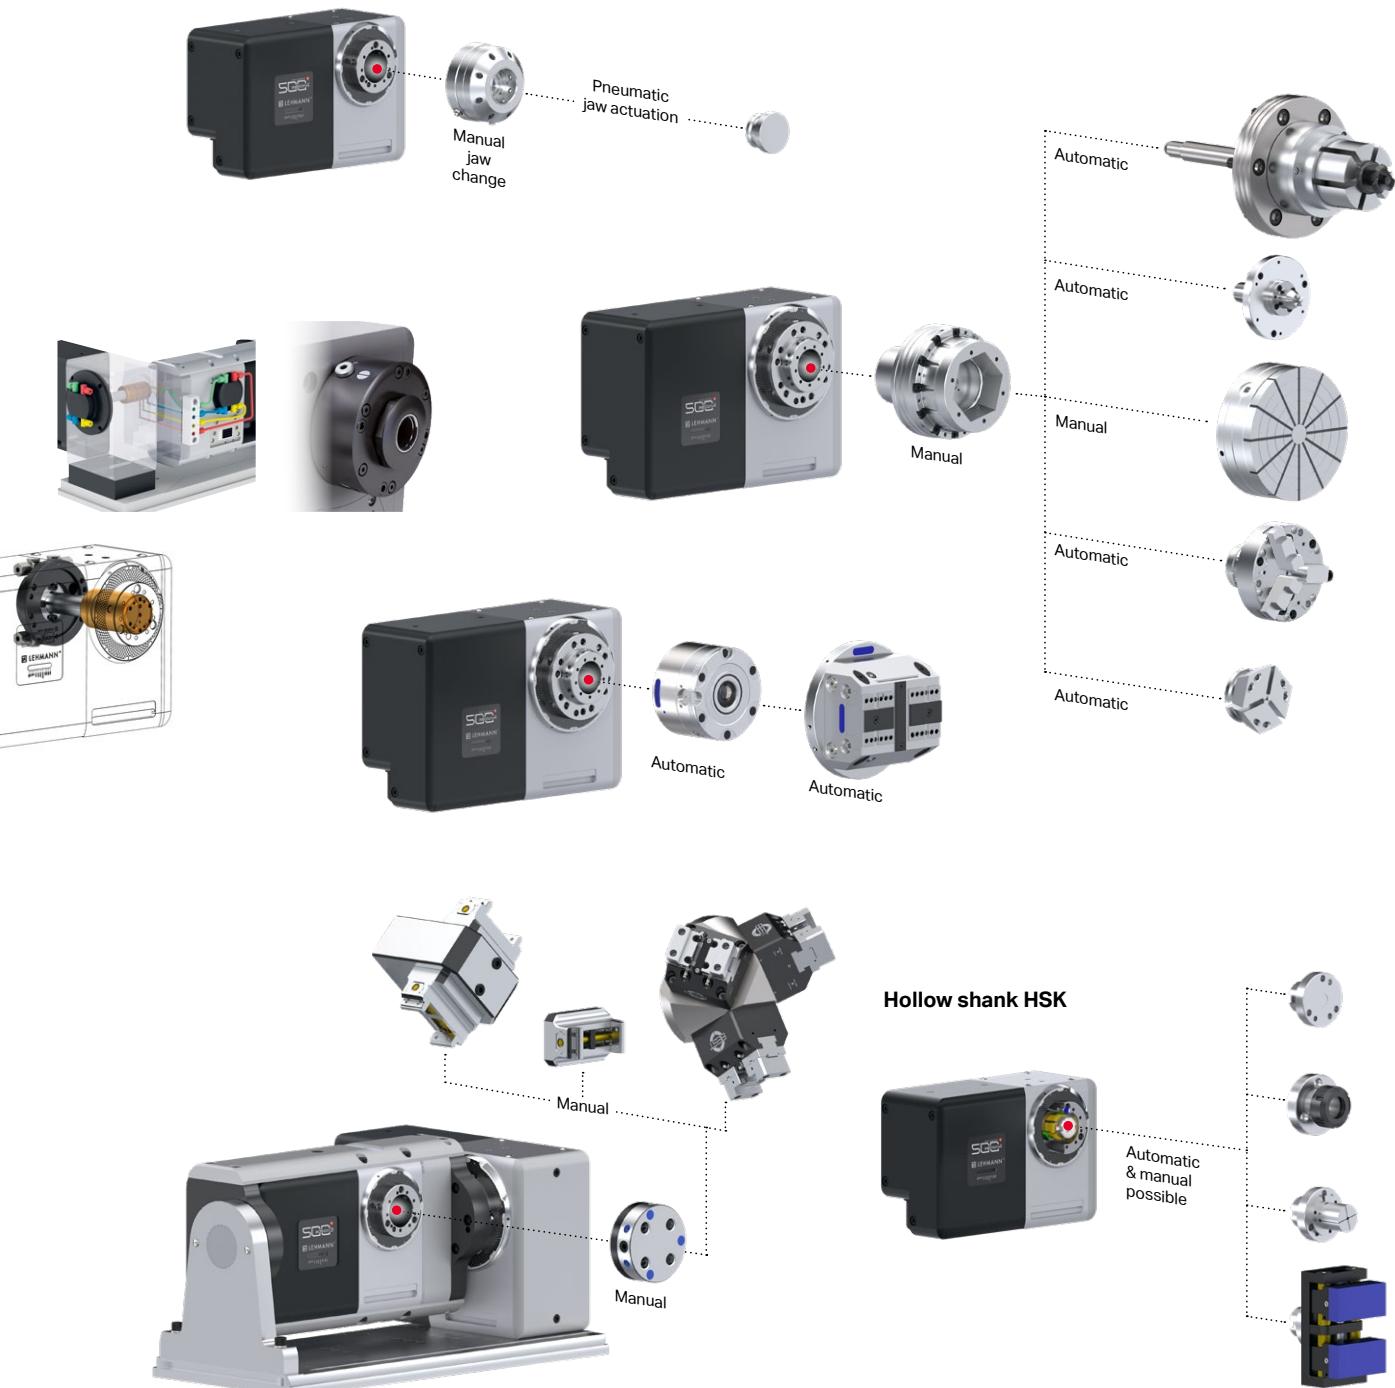

Bearing technology for the most stringent requirements

Backlash-free preloaded high-precision rolling bearings ensure maximum repeatability and extremely high rigidity

PGD gear unit (Preloaded Gear Drive)


- Strong gear teeth
- Wheel and worm gear made of steel, surface hardened and ground, runs in an oil bath
- Worm gear with 4-way backlash-free mount
- Permanent backlash-free preload
- High long-term precision, virtually wear-free
- High impact resistance
- Up to 20,000 h or 20 million* 90° positionings
- Easy to adjust, if ever necessary

* Based on long-term tests of more than 20,000 h with over 23 million 90° cycles; valid under appropriate use; the limit reached first is valid


IP 67 protection (M-Line)

- All models are fully sealed

Maintenance-free gear unit – permanently preloaded

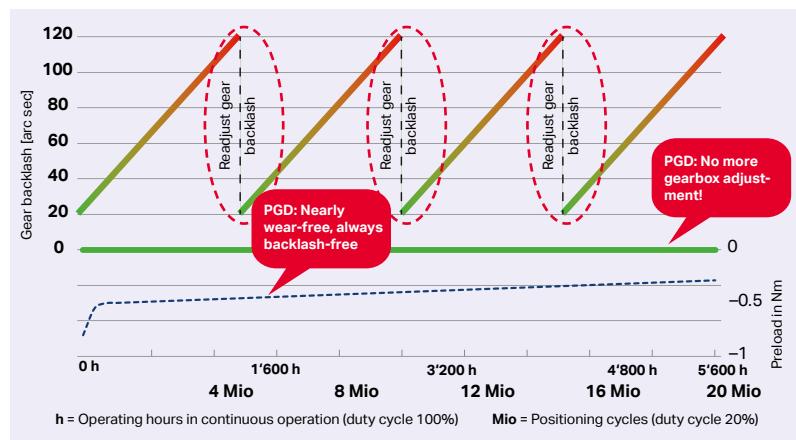


All values based on internal testing using standard load and catalog values (speed, cycle time).
Duty cycle as defined by pL LEHMANN.

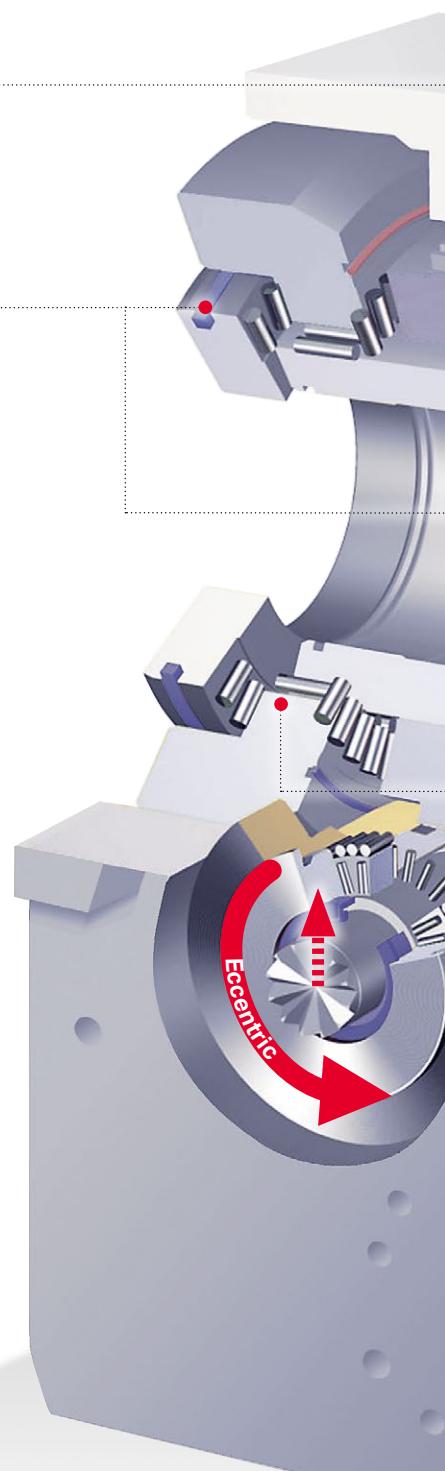


Thermally optimized gear unit

PGD gear unit has backlash-free preload for excellent synchronization characteristics. FR, FT and FA in 0.005 mm (in accordance with ISO 10360-3)

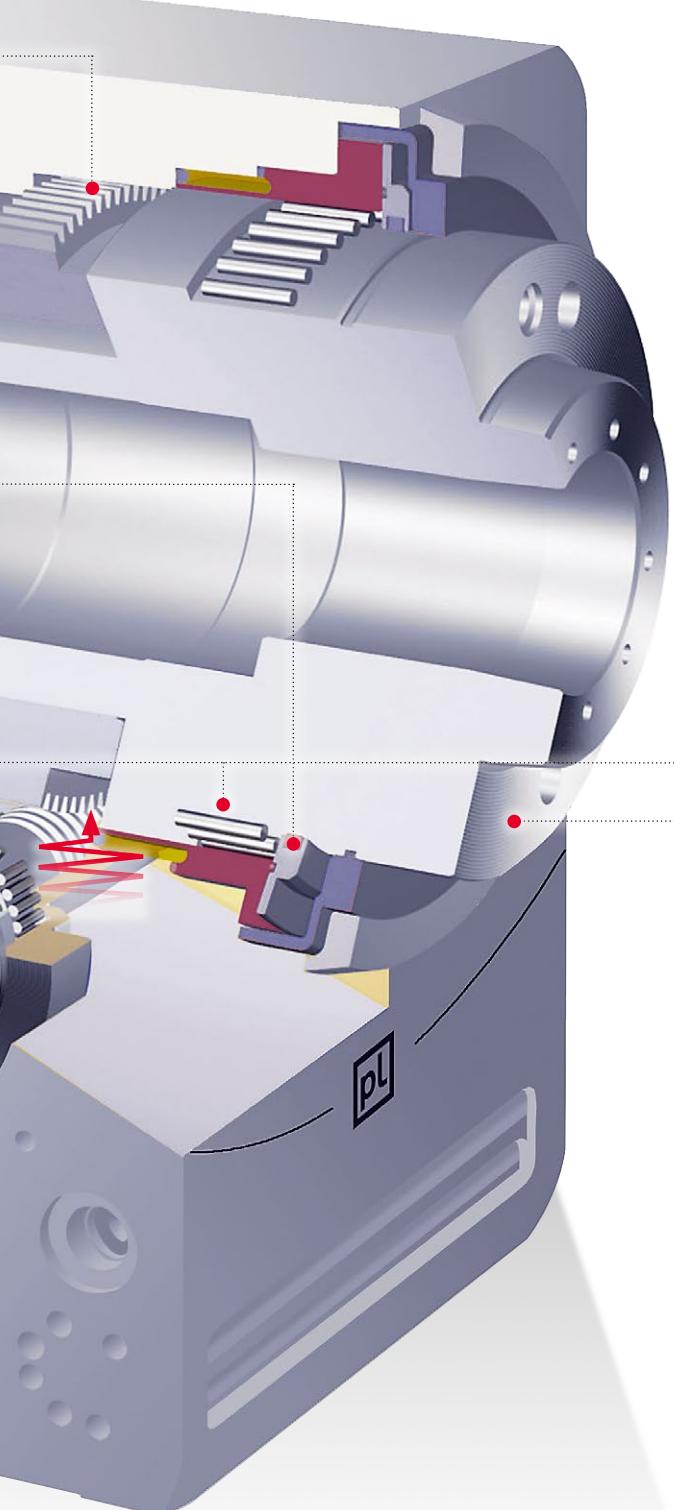

Stress test during 70 cycles: FR, FT and FA in 0.005mm

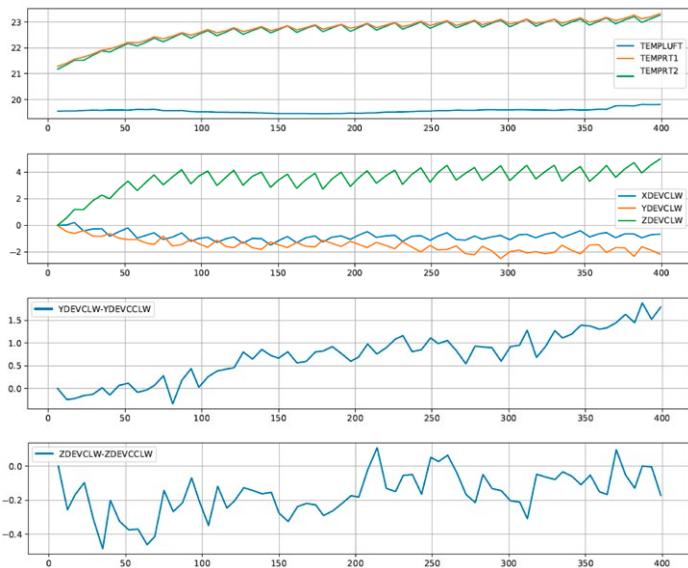

Spindle bearing

- 4x large precision roller bearings, fitted without play
- Long distance between the radial bearings provides for high spindle rigidity
- All bearing points run in oil baths
- Good gear unit efficiency ratio (up to 60%)

Spindle

- Steel, hardened and ground
- Universal interface with HSK cone and / or short cone KK (both to DIN)
- Accessories for manual or automatic HSK/ISO clamping, various collet systems, face plates and jaw chucks, palletizing systems, rotary unions and clamping cylinders, etc.

Thermally insulated motor mounting

Special thermal insulation minimizes thermally induced shifts and inaccuracies

Transport and bleeding holes

- Bolt holes for transport
- Easily accessible bleeding holes for oil bath and spindle clamping system

Drive motor

- A single housing for different AC, DC and stepper motors
- Motors are easy to replace
- Mounted thermally insulated

USB slot (M-Line)

- Fast, simple data output for evaluation on a PC in case of malfunction
- Licensing possibility with registration code via USB stick (OEM feature)
- Fully sealed, placed in well protected location
- PC connection for remote diagnostics

unique

Cable feed (M-Line)

- Cable feed up to 150° (in different directions) swiveling and can be secured
- Circlip for quick change in the event of a malfunction
- All wires and hoses plugged into the motor housing




Connector interfaces

- Standardized, fully wired, available for many different machines
- Wide range of lengths and connectors



Industry 4.0 for metrology

5 sensors monitor the most important functions and provide data for significant performance improvement in accuracy and efficiency (in preparation)

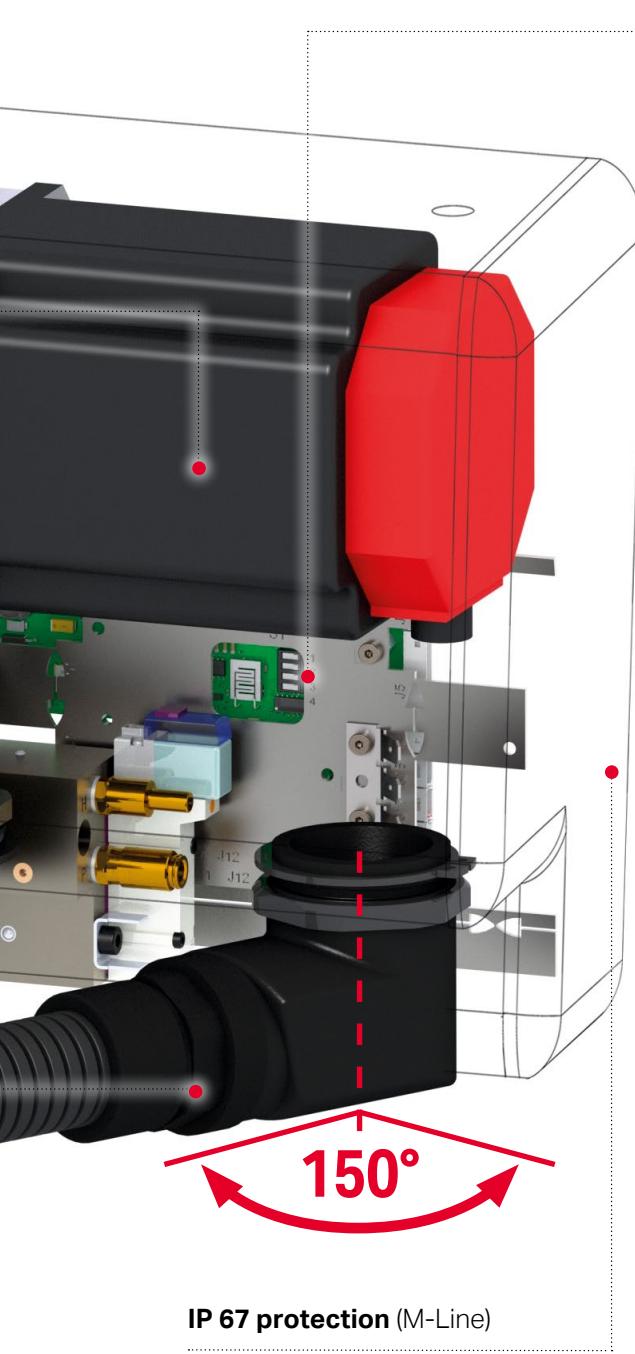

IP 67 protection (M-Line)

- Fully sealed motor compartment to IP67
- Prevents damage to motor, wiring, connectors, etc.

PL-iBox – for real industry 4.0 (M-Line)

unique

Helps to increase productivity and availability, lower downtime and maintenance costs and permits quick troubleshooting and preventive maintenance.

Sensors for ...

- Speed
- Internal pressure
- Temperature
- Humidity
- Shock / impact
- Limit value exceeded with real-time stamp

Components

- Faster microprocessor
- 3D acceleration sensor – shock sensor

Monitoring

- Duty cycle limit – overload protection, prevents motor and gear unit damage

Interfaces

- Bluetooth – set parameters and read out data via tablet/notebook
- Web server with Ethernet and RJ45 connector – display state/error on CNC
- Input for current sensor

Prepared for options

- External WLAN or GSM module
- External, enhanced vibration sensor with additional DSP
- Email notification, e.g. of error messages

Never search for documents again – everything at hand at all times
No Internet connection necessary!

The everyday life of a commissioning technician

The information you need is missing: Electrical diagrams, drive data, parameter lists, commissioning instructions, etc. Commissioning must be interrupted, the search for data begins: Paper? Internet? Passwords? The clock is ticking. The deadline is approaching. Necessity forces us to do the best we can with the knowledge we have.

Result: It rotates, but functions only halfway, pL specifications cannot be met (speed, cycle time, accuracy, etc.)


pL finding: Investigations have shown that 70% of optimization cases can be attributed to poor or incorrect commissioning.



smart doc on the USB stick

- A mini USB stick is plugged into a USB slot (in the tilting axis on T-type rotary tables)
- The following new files have been saved on this USB stick:
 - 1 ADAT drive setup data for each system
 - 2 Appropriate parameter list for the provided CNC control system
 - 3 General operating manual / user's manual in German and English
 - 4 General commissioning manual in German and English with all diagrams

- 5 If necessary, machine-specific commissioning manual in German and English (e.g. for Brother)
- 6 Indexing accuracy report(s) to VDI/DGQ 3441
- 7 Geometry report
- 8 If necessary, special drawings from the customer
- The files are also available online in the pL-ERP (for Help-liner) as well as in the «full documentation» on the pL website at all times (accessible to all pL representatives)
- All files at the current revision level – version control not needed, risk of errors minimized

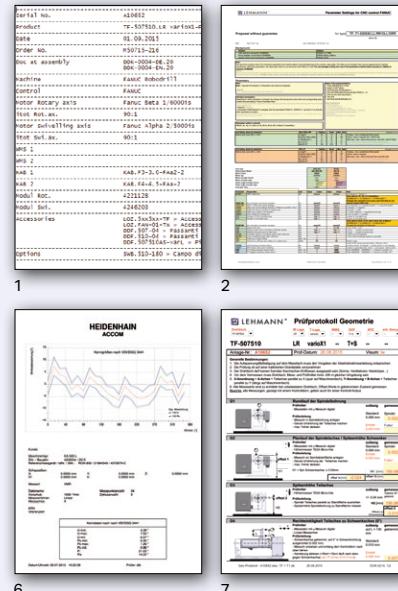


Product documentation saved securely:
the USB stick remains on the product




Your benefit

- Download no longer necessary – extra work eliminated
- Password no longer necessary – waiting time for registration eliminated
- Internet connection no longer necessary – problems with poor or no network connection eliminated
- No lost documents, no missing USB stick – stick is always inserted, «loaded» and safely powered under the USB slot cover
- Everything needed is immediately available (appropriate for each rotary table) – tedious searching eliminated
- Emergency solution by technician no longer necessary – existing, often wrong (because out-of-date) data are no longer used

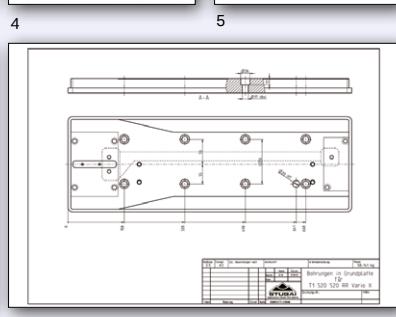


If the USB stick is lost, everything is still available on the website.

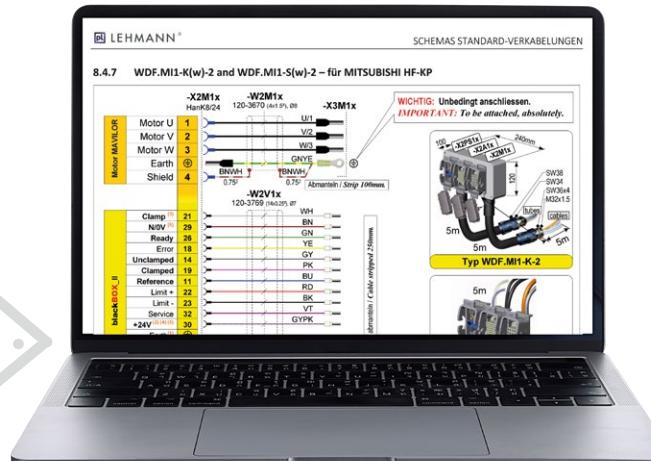

ROTOLUTION – customer-specific turnkey solutions «on top», largely with proven standard elements, from CAD to commissioning.

ROTOMATION – The ideal expansion with standardized automation. Economical. Professional. Simple.

Standard

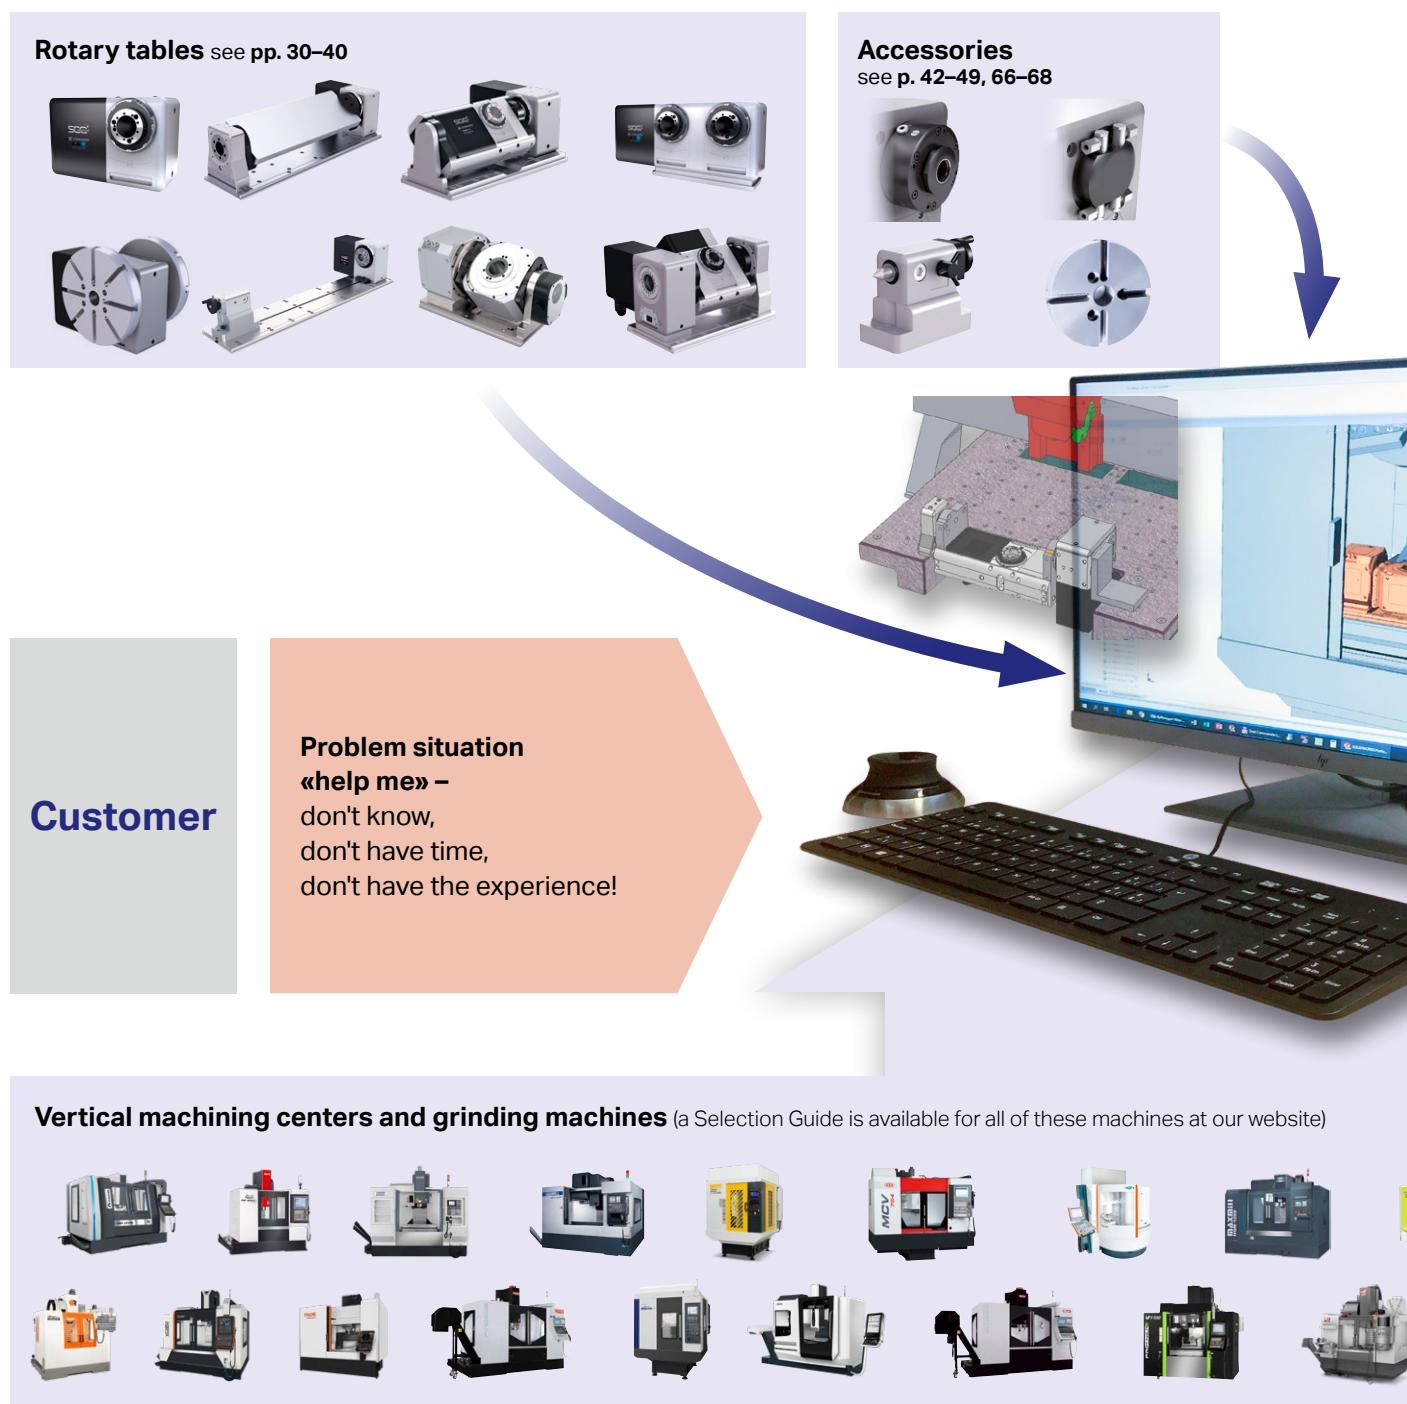

*Examples



ROTOLUTION

CAD & adaptation

- Installation check
- Adjustment to standard parts
- Special parts

CAD & clamping devices

- Workpiece clamping
- Standard/special

see pp. 65–95



ROTOmATION

CAD & automation

- Workpiece handling
- Partnerships (general contractor with partners) e.g. reinmechanic – mobile concept

see pp. 96/97

Project management and execution, direct if needed

Customer

Problem solution «on top» –
Standard and ROTOLUTION from a single source, ROTOMATION and machine in partnership



Overview & Applications

System, Facts & Service

Q-Line & M-Line
Tables

SPZ, DDF, RST
GLA, WMS, MOT, KAB

Tolerances
Technology & Glossary

Tooling

Present in over 20 countries: from sales consultation to the final service




Services from A to Z



Increase productivity – Extend life cycle

Comprehensive and professional services throughout the product life cycle – maximum availability with consistent quality and high productivity.

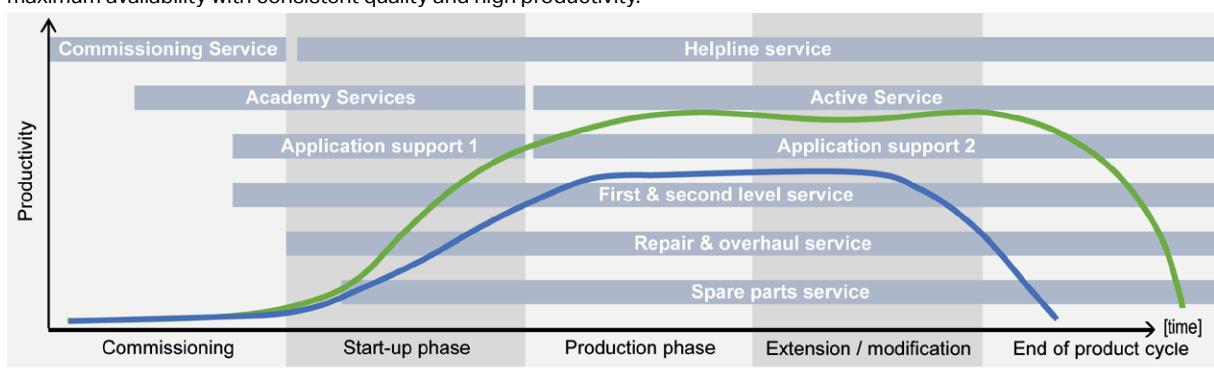

Excerpt from our production: High vertical range of manufacture gives flexibility and quality



With workpiece pool for unmanned production



High precision circular and flat grinding



Material is in flow



Assembly areas with Kanban System



Efficient equipping of spare parts packages

Interested? Contact us
or visit our website at
www.lehmann-rotary-tables.com

pL LEHMANN rotary table MA-Q08

- Components that have proven themselves in production
 - Very precise CNC heavy duty rotary tables
 - Multifunction holder for various workpiece clamping systems
 - Intelligent accessories such as the QuickMover

→ For CMMs and other measuring devices



Application


In production as well as in the metrology laboratory, fast and easy, in combination with height, contour and surface measuring devices, for roundness testers and coordinate measuring machines or machine tools.



On the opposite side:
foldable digital display
(exact angle position in
0.001°)

Metrology package

- Rotary table, cast iron housing for stable positioning
 - QuickMover - protects the granite slab and enables feather-light movement
 - Elegant handwheel and zeroing button
 - Reading accuracy 0.001° (integrated angle encoder)
 - Three jaw chuck manual or many others available

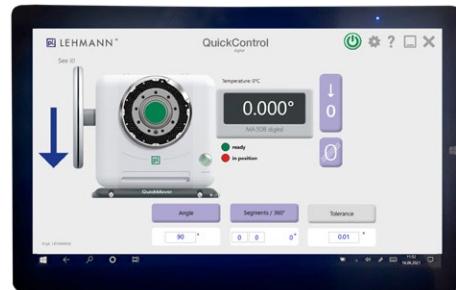


Optional ControlTablet with QuickControl digital.

Simple intuitive user guidance

- Zero position
 - Target angle
 - Segments
 - Tolerance band
 - In position

Item No.

Item No.	Designation
MA-Q08.Lm	pL LEHMANN rotary table manual, handwheel left
MET.QQx-Mk	QuickMover compact for MA-50x
CNC.C-digi	Version digital
CNC.Tablet	ControlTablet

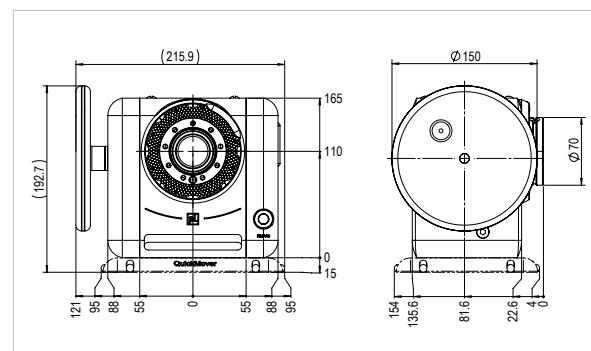

The manual, user-friendly and super flexible rotary table for manufacturing and metrology lab: ideal for any measuring station

Fast and accurate positioning for more efficient use of a height gauge.
User-friendly and allows measurement of parts without reclamping.



Fast setup thanks to extremely simple zero point clamping system
(here for System 3R)



Roundness measurement with a dial gauge mounted on a grid plate.
Optional dk grid plate as an ideal platform for additional tools.

				MA-Q08
Dimensions	Swing diameter		mm	160
	Center height		mm	125 (with QuickMover)
	Total weight	with motor	kg	9
	Center bore	throughout	mm	31
Bearing / clamping	Max. spindle load ¹⁾	vertical	kg	40
		horizontal	kg	40
Gear unit	Positioning accuracy		± arc sec	20 (opt.: 12)
	Average repeat accuracy Ps		± arc sec	2 (opt.: 1)
	Max. speed		rpm	–
Precision	Radial run-out	at spindle diameter	µm	6 (opt.: 3 to 2)
	Axial run-out	at spindle end face	µm	6 (opt.: 3 to 2)
	Parallelism	of rotary axis relative to footprint	µm/100 mm	5 (opt.: 2)

¹⁾ Depending on the use, the rotary table must be fixed in place



Practical additional option for standard measuring devices

Ready for the production of high quality parts

pL LEHMANN rotary table EA-Q08.L

- Components that have proven themselves in production
- Very precise CNC heavy duty rotary tables
- Multifunction holder for various workpiece clamping systems
- Intelligent accessories such as the QuickMover
- For CMMs and other measuring devices

Ingenious: just briefly probe with touch probe and the rotary table rotates to the next position



Application

In both manufacturing and the metrology lab, fast and easy measurement on various measuring devices (CMMs, shafts, surface, multis.), positioning, radial run-out, scanning; manual/automatic operation

Metrology package

- Rotary table with servomotor and integrated control system
- QuickProcess, actuation by touch
- QuickMover – protects the granite slab and enables feather-light movement
- QuickBar for faster alignment
- Three jaw chuck manual or many others available
- QuickControl software including tablet with functions for angles, index calculations, endless, absolute or incremental rotations, teach-in, program memory


QuickConnect option

- Cable connection to machine control
- «Start» input signal
- «Reset» input signal
- «In Position» output signal
- 24 V emergency stop contact

Item No.

Item No.	Designation
EA-Q08.L	EA-Q08 with motor at left
EA-Q08.L light	EA-Q08 with motor at left, light
MOT.NA-PD4-3	
KAB.NAa-3.0-Qli-2	Required for EA-Q08 /EA-Q08 light
CNC.C-pro	Version professional
CNC.Tablet	ControlTablet

To order ControlTablet with QuickControl basic separately, see p. 35
For optional direct measuring system, see p. 49; for optional QuickMover, see p. 34

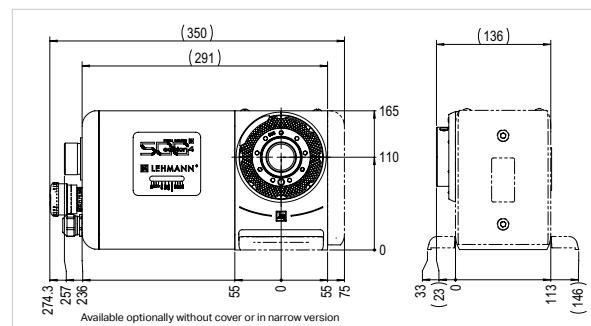

Ready for existing and new measuring instruments



Ready within seconds

Connect power

Connect to tablet or PC

Start QuickControl software



Automation ready

Quick Process – Capacitive sensor

Quick Connect – I/O communication

QuickData – Communication with variables



		EA-Q08 (light)	
Dimensions	Swing diameter	mm	160
	Center height	mm	110
	Total weight with motor throughout	kg	25 (12)
	Center bore	mm	31
Bearing / clamping	Max. spindle load ³⁾ with tailstock ⁴⁾	kg	120 (40)
	without tailstock	kg	60 (20)
	Standard load ¹⁾	kg	12
	Max. tilting moment ⁵⁾	Nm	8 (5)
Gear unit	Positioning accuracy	± arc sec	20 (opt.: 12)
	Average repeat accuracy Ps	± arc sec	2 (opt.: 1)
	Max. speed with standard load ¹⁾	rpm	16
Precision	Radial run-out ²⁾ at spindle diameter	µm	6 (opt.: 3 to 2)
	Axial run-out ²⁾ at spindle end face	µm	6 (opt.: 3 to 1)
	Parallelism ²⁾ of rotary axis relative to footprint	µm/100 mm	5 (opt.: 2)


¹⁾ Speed with standard load; for higher loads, speed may have to be reduced; drive data for NANOTEC stepper motor ST6018L3008-B

²⁾ For measurement method and valid values, see p. 48


³⁾ Max. permissible torque due to radial eccentric loads: 9 Nm

⁴⁾ Feedstock see p. 43

⁵⁾ If tilting moment due to spindle load is greater than 8 Nm (light: 5 Nm), the rotary table must be screwed tight. Reference value: max. workpiece 100x100x100 made of steel with BFU.507-125ps light. We charge for other bodies or weights on request.



3)



5)



Simple operation, separately or automated
Ready for the production of high quality parts

Overview & Applications

System, Facts & Service

Q-Line & M-Line Tables

SPZ, DDF, RST, GLA, WMS, MOT, KAB

Tolerances
Technology & Glossary

LEHMANN

QuickMover and QuickBar

Feather-light and gentle moving, perfect positioning and stable measurement



Base plate vertical

QuickMover - Protects the granite slab and makes handling feather-light

At the push of a button, the rotary table can be moved or shifted almost weightlessly and brought smoothly and safely into position. When released, the rotary table is held firmly and securely.

Technical data

- Integrated mini-compressor
- Air cushion approx. 0.009mm
- Parallelism of precision stop to rotary axis 0.001 mm/100 mm
- Center height raised by 15 mm

Items included in delivery

- QuickMover adapter plate with precision-ground AirFlow nozzles
- Integrated precision stop with 2 balls per side
- Built-in manual pushbutton



QuickBar - Align quickly and reliably



EA-508.R-Q with stop bar for surface mounting, hole spacing 200 mm, can also be mounted without holes (adhesive can be removed without leaving residue)

QuickProcess: briefly probe with measuring probe, then the rotary table moves to the next position – without M-link or integration in the machine control system

Pushbutton for activating the air cushion

Emergency stop (on EA-508 Q-Line only)

Item No.

Item No.	Designation
MET.Q0x-M	QuickMover for EA-50x
MET.Q0x-Mk	QuickMover compact for MA-50x
MET.Q0x-P	QuickProcess

Items included in delivery

- Alignment bar with precision notches, for surface or edge mounting
- For hole spacing 200 and 300 mm Adapter for thread M10 + M12
- If thread in granite is available, direct mounting is possible.

MA-508.m-Q with stop bar for edge mounting, can be mounted without holes (adhesive can be removed without leaving residue)

Item No.

Item No.	Designation
MET.Q0x-Bar-F	QuickBar for edge mounting
MET.Q0x-Bar-W	QuickBar for surface mounting

QuickControl with Microsoft tablet

Easy to operate,
stand-alone or
automated with M-function



ControlTablet MT – can be easily mounted anywhere and brought into operating position

Easy control via peak interface. Can be mounted anywhere, while equipped with both a suction cup and magnet. Easy to operate, lightweight and universal. Particularly handy in the shopfloor area as well.

Technical data

- Win10 Pro
- Intel Celeron N4120 processor, 4 MB cache, max. 2.6 GHz
- L 300 x W 200 x D 50 mm
- Display 11.6" / resolution 1920 x 1080 pixels

Items included in delivery

- ControlTablet, incl. operating system
- Charger
- USB Bluetooth dongle for pL iBox
- Anodized tablet holder with magnets and suction cup
- USB docking station with Ethernet, video, HDMI etc
- QuickControl software, basic or pro
- TeamViewer
- blackBOXcom
- Camera
- Set-up instructions A4



Tablet holder with suction cup or magnet.



QuickDock – the perfect interface for supplementary locator systems e.g. from DK.

QuickControl PROFI – fully automatable without integration



- Manual operation
- Referencing
- Angle
- Indexing calculator
- Absolute / incremental / endless
- Zeroing at each position
- Programming mode
- Program memory
- External control via M-function (fully automatic sequence via machine control)



QuickBox – high-quality box made of white leather for safe and careful transport



QuickShell – high-quality cover made of leather for protection from dust and impact if rotary table is parked

Item No.

Item No.	Designation
CNC.C-digi	Version digital
CNC.C-pro	Version professional
CNC.PFB-Ct	Box for potential isolation
CNC.Tablet	ControlTablet
MET.Q0x Box	QuickBox
MET.Q0x-D08	QuickDock M8, 15 mm spacing
MET.Q0x-D10	QuickDock M10, 15 mm spacing
MET.Q0x-S	QuickShell for EA-50x
MET.Q0x-Sk	QuickShell compact for MA-50x

EA-M07 / EA-M08

4. Axis, integrated in machine control
Suitable for weights up to 40/80 kg



EA-508.L-mt

			EA-M07	EA-M08
Dimension	Swivel ø	mm	160	
	Center height	mm	110	
	Total weight with motor	kg	25 (light: 12)	
	Center bore throughout	mm	31	
	with tailstock	kg	80 (light: 40)	
	without tailstock	kg	40 (light: 20)	
	Standard load ¹⁾	kg	17	12
Bearing / clamping	Max. spindle load	kN	44 (light: 15)	
	Max. axial force	Nm	1,200 (light: 400)	
	Max. tilting moment	Nm		
	Max. moment of inertia	kgm ²	0.05	0.025
	J max	kgm ²	0.5	0.25
	Max. feed torque ³⁾	Nm	27	21
Gear unit	Torque limit values from eccentric loads ⁴⁾		Nm 25	
	Indexing accuracy Pa ²⁾	± arc sec	without WMS 20 with WMS 25 to 1	
	Repeat accuracy Ps average	± arc sec	2 / 0.5	
	Max speed with standard load ¹⁾	rpm	20	35
Precision	Radial run-out ²⁾ on spindle ø	µm	3 / 2	
	Axial run-out ²⁾ at spindle end face	µm	3 / 2	
	Parallelism ²⁾ Rotary axis to footprint	µm/100mm	5	

¹⁾ Mutually dependent; drive data valid for SANYO KA511 DC motor at 20% duty cycle

²⁾ For measurement method and validity of values, see p. 48

³⁾ Limit value for gear unit (valid with above motor), at 1 rpm

⁴⁾ Calculation of torque on request; for EA-M08 self-locking max. 8 Nm

Achievable indexing accuracy depends on the selected direct measuring system; see p. 49

Version


- Externally dry and oil-free, sealed against oil leakage, no compressed air
- Delivered protected against rust without rust inhibitor
- DC motor mounted thermally insulated (standard: SANYO K-type; other motors on request)
- Without clamping
- Sensors with LEDs, data logger and microprocessor, e.g. for
 - Condition monitoring and display
 - Service display
 - Data history for cause analysis
 - Remote diagnostics
 - Data output via USB slot

Item No.

Item No.	Designation
EA-M0x.L	Rotary table with motor at left
EA-M0x.L light	Rotary table with motor at left, light
EA-M0x.R	Rotary table with motor at right
EA-M0x.R light	Rotary table with motor at right, light
MOT.SA-KA511TXX*	Sanyo KA511TXX motor (Tacho) → WMS mandatory
KAB.S1-6.0w-o-2	Cable 6 m, without plug
MET.PGD (optional)	ThermoBreak for metrology

Options: For QuickMover, see p. 34 and for direct measuring systems (WMS), see p. 49

* For motor details and other cable versions, see p. 48

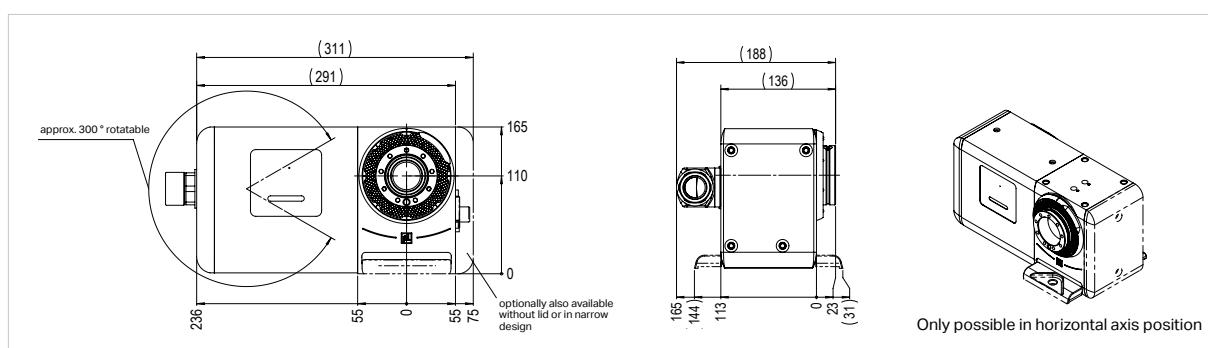

EA-M10 / EA-M11

4. Axis, integrated in machine control
Suitable for weights up to 80/160 kg



Item No.
GPL.510ver-180



EA-511.L-mt

			EA-M10	EA-M11
Dimension	Swivel ø	mm	240	
	Center height	mm	150	
	Total weight	kg	32 (with GPL.510ver-180: 40 kg)	
	Center bore	mm	34	
	with tailstock	kg	160	
	without tailstock	kg	80	
	Standard load ¹⁾	kg	42	22
Bearing / clamping	Max. spindle load	kN		
	Max. axial force	kN	46	
	Max. tilting moment	Nm		2,000
	Max. moment of inertia		kgm ²	0.2
	J max		kgm ²	2
	Max. feed torque ³⁾		Nm	33
				25
Gear unit	Torque limit values from eccentric loads ⁴⁾		Nm	40
	Indexing accuracy Pa ²⁾		± arc sec	without WMS 20 with WMS 25 to 1
	Repeat accuracy Ps average		± arc sec	2 / 0.5
	Max speed	with standard load ¹⁾ 	rpm	25
Precision	Radial run-out ²⁾	on spindle ø	µm	3 / 2
	Axial run-out ²⁾	at spindle end face	µm	3 / 2
	Parallelism ²⁾	Rotary axis to footprint	µm/100mm	5

¹⁾ Mutually dependent; drive data valid for SANYO KA720 DC motor at 20% duty cycle

²⁾ For measurement method and validity of values, see **p. 48**

³⁾ Limit value for gear unit (valid with above motor), at 1 rpm

⁴⁾ Calculation of torque on request; for EA-M11 self-locking max. 20 Nm

Achievable indexing accuracy depends on the selected direct measuring system; see **p. 49**

Version


- Externally dry and oil-free, sealed against oil leakage, no compressed air
- Delivered protected against rust without rust inhibitor
- DC motor mounted thermally insulated (standard: SANYO K-type; other motors on request)
- Without clamping
- Sensors with LEDs, data logger and microprocessor, e.g. for
 - Condition monitoring and display
 - Service display
 - Data history for cause analysis
 - Remote diagnostics
 - Data output via USB slot

Item No.

Item No.	Designation
EA-M1x.L	Rotary table with motor at left
EA-M1x.R	Rotary table with motor at right
MOT.SA-KA720TXX*	Sanyo KA720TXX motor (Tacho) → WMS mandatory
KAB.S1-6.0w-o-2	Cable 6 m, without plug
MET.PGD (optional)	ThermoBreak for metrology

Options: For QuickMover, see **p. 34** and for direct measuring systems (WMS), see **p. 49**

* For motor details, see **p. 48**

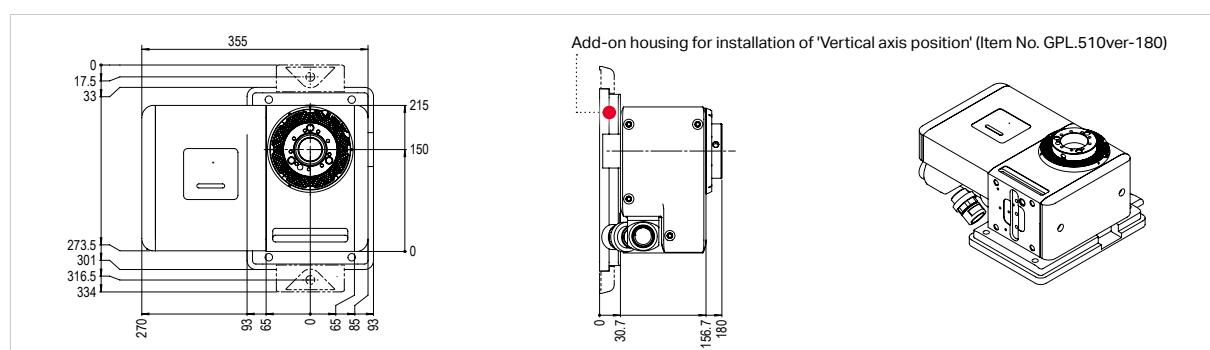

TF-M07M10 / TF-M08M10

4th/5th axes for demanding measurement tasks,
workpieces up to 25 kg, **without** support bearing



TF-M08M10.LL

		TF-M07M10	TF-M08M10
Dimension	Swivel ø	mm	280 (180)
	Swiveling range	degrees	90° +5°/-25° (optional 180° ±25°)
	Center height	mm	180
	Total weight with motor	kg	65
	Center bore throughout	mm	31
Bearing / clamping	Max. spindle load 0°-30°	kg	25
	30°-90°	kg	12
	Standard load ¹⁾	kg	12
	Max. axial force 4. axis	kN	6
Bearing / clamping	Max. tilting moment 4. axis	Nm	1,200
	5. axis	Nm	2,000
	Max. moment of inertia Standard load ¹⁾	kgm^2	0.05
	J max	kgm^2	0.5
	Feed torque max ³⁾ 4. axis	Nm	27
	5. axis	Nm	21
Gear unit	Gear unit loading without load	Nm	-12
	5. axis with standard load	Nm	15
	M max / M limit eccentric	Nm	250 / 40
	Indexing accuracy Pa 4. axis ²⁾	± arc sec	25 to 1
	5. axis (90°) ⁴⁾	± arc sec	25 to 1
	Repeat accuracy Ps average 4. axis	± arc sec	2 to 0.5
	5. axis	± arc sec	2 to 0.5
	Max. speed at standard load 4. axis ¹⁾	min^{-1}	20 to 25
	5. axis ¹⁾	min^{-1}	25 to 30
Precision	Radial run-out ²⁾ on spindle ø	µm	3 / 2
	Axial run-out ²⁾ at spindle end face	µm	3 / 2
	Parallelism ²⁾ Spindle to base	µm/100mm	5

¹⁾ Mutually dependent; drive data valid for SANYO KA511 and. KA720 DC motors

²⁾ For measurement method and validity of values, see main catalog, p. 48

³⁾ Limit value for gear unit (valid with above motor), at 1 rpm

⁴⁾ Torque calculation on request

Achievable indexing accuracy depends on the selected direct measuring system; see p. 49

Item No.

TF-M07M10.LL-SA-EN

Motor	SA-EN = Sanyo Encoder, SA-TX = Sanyo tachometer
Tilting axis motor position	L=left, R=right
Rotary axis motor position	L=left, R=right
Tilting axis size	510
Rotary axis size	507, 508
Rotary table model	



Version

See respective EA rotary table

Attention:

For motor and measuring system data as well as all drive-related data such as speeds, feed torques, and indexing and repeat accuracies, refer to the respective EA rotary table, pp. 36–37 or p. 49

All other item nos. as for respective EA rotary table
Options: For QuickMover, see p. 34 and direct measuring systems (WMS), see p. 49

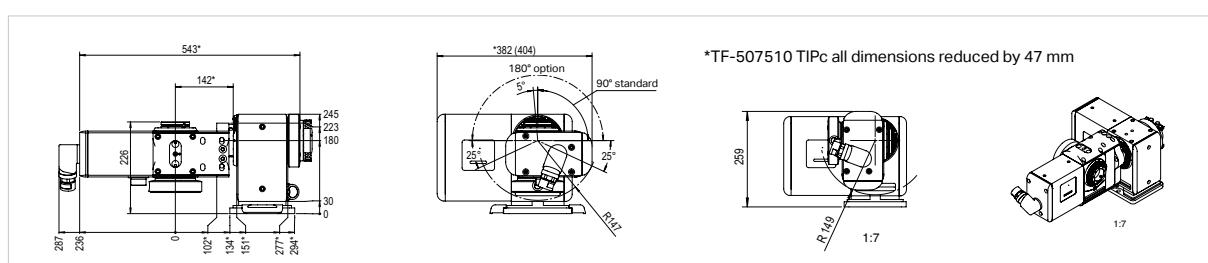

T1-M07M10 / T1-M08M10

4th/5th Axes for demanding measurements,
workpieces up to 25 kg, **with** support bearing



T1-M08M10.LL

			T1-M07M10	T1-M08M10
Dimension	Swivel ø	mm	280 (180)	
	Swiveling range	degrees	90° +5°/-25° (optional 180° ±25°)	
	Center height	mm	180	
	Total weight with motor	kg	85	
	Center bore throughout	mm	31	
Bearing / clamping	Max. spindle load 0°-30°	kg	25	
	30°-90°	kg	12	
	Standard load ¹⁾	kg	12	
	Max. axial force 4. axis	kN	6	
	Max. tilting moment 4. axis	Nm	1,200	
Gear unit	5. axis	Nm	2,000	
	Max. moment of inertia Standard load ¹⁾	kgm^2	0.05	0.025
	J max	kgm^2	0.5	0.25
	Feed torque max ³⁾ 4. axis	Nm	27	21
	5. axis	Nm	25 to 35	
Precision	Gear unit loading without load	Nm	-12	
	5. axis with standard load	Nm	15	10
	M max / M limit eccentric	Nm	250 / 40	
	Indexing accuracy Pa 4. axis ²⁾	± arc sec	25 to 1	
	5. axis (90°) ⁴⁾	± arc sec	25 to 1	
Repeat accuracy Ps average	4. axis	± arc sec	2 to 0.5	
	5. axis	± arc sec	2 to 0.5	
	Max. speed at standard load 4. axis ¹⁾	min^{-1}	20 to 25	25 to 30
	5. axis ¹⁾	min^{-1}	15	
	Radial run-out ²⁾ on spindle ø	μm	3 / 2	
Axial run-out ²⁾	at spindle end face	μm	3 / 2	
	Parallelism ²⁾ Spindle to base	$\mu\text{m}/100\text{mm}$	5	

¹⁾ Mutually dependent; drive data valid for SANYO KA511 and KA720 DC motors

²⁾ For measurement method and validity of values, see p. 48

³⁾ Limit value for gear unit (valid with above motor), at 1 rpm

⁴⁾ Torque calculation on request

Achievable indexing accuracy depends on the selected direct measuring system; see p. 49

Item No.

T1-M07M10.LL-SA-EN

Motor SA-EN = Sanyo Encoder, SA-TX = Sanyo tachometer
Tilting axis motor position L=left, R=right
Rotary axis motor position L=left, R=right
Tilting axis size 510
Rotary axis size 507, 508
Rotary table model



Version

See respective EA rotary table

Attention:

For motor and measuring system data as well as all drive-related data such as speeds, feed torques, and indexing and repeat accuracies, refer to the respective EA rotary table, pp. 36–37 or p. 49

All other item nos. as for respective EA rotary table
Options: For QuickMover, see p. 34 and direct measuring systems (WMS), see p. 49

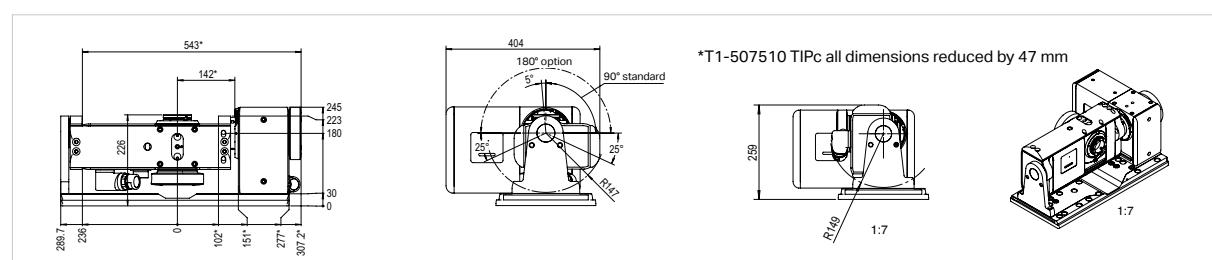

T1-M10M20 / T1-M11M20

4th/5th Axes for demanding measurement tasks for workpieces up to 80 kg, **with** support bearing



T1-M08M10.LL

			T1-M10M20	T1-M11M20
Dimension	Swivel ø	mm	340 (220)	
	Swiveling range	degrees	90° +5°/-25° (optional 180° ±25°)	
	Center height	mm	210	
	Total weight with motor	kg	160	
	Center bore throughout	mm	31	
Bearing / clamping	Max. spindle load 0°-30°	kg	80	
	30°-90°	kg	42	
	Standard load ¹⁾	kg	42	21
	Max. axial force 4. axis	kN	6	
Bearing / clamping	Max. tilting moment 4. axis	Nm	2,000	
	5. axis	Nm	3,900	
	Max. moment of inertia Standard load ¹⁾	kgm^2	0.2	0.07
	J max	kgm^2	2.0	0.7
Gear unit	Feed torque max ³⁾ 4. axis	Nm	35	25
	5. axis	Nm	125	
	without load	Nm	-22	
	with standard load 5. axis	Nm	30	5
	M max / M limit eccentric	Nm	440 / 110	
Indexing accuracy Pa	4. axis ²⁾	± arc sec	25 to 1	
	5. axis (90° ⁴⁾	± arc sec	25 to 1	
Repeat accuracy Ps average	4. axis	± arc sec	2 to 0.5	
	5. axis	± arc sec	2 to 0.5	
	Max. speed at standard load 4. axis ¹⁾	min^{-1}	25	40
	5. axis ¹⁾	min^{-1}	15	
Precision	Radial run-out ²⁾ on spindle ø	µm	3 / 2	
	Axial run-out ²⁾ at spindle end face	µm	3 / 2	
	Parallelism ²⁾ Spindle to base	µm/100mm	5	

¹⁾ Mutually dependent; drive data valid for SANYO KA720TXX and KA730TXX DC motors

²⁾ For measurement method and validity of values, see p. 48

³⁾ Limit value for gear unit (valid with above motor), at 1 rpm

⁴⁾ Torque calculation on request

Achievable indexing accuracy depends on the selected direct measuring system; see p. 49

Item No.

T1-M10M20.LL-SA-EN

Motor SA-EN = Sanyo Encoder, SA-TX = Sanyo tachometer
 Tilting axis motor position L=left, R=right
 L=left, R=right
 520
 510, 511
 Rotary table model



Version

See respective EA rotary table

Attention:

For motor and measuring system data as well as all drive-related data such as speeds, feed torques, and indexing and repeat accuracies, refer to the respective EA rotary table, pp. 36–37 or p. 49

All other item nos. as for respective EA rotary table
 Options: For QuickMover, see p. 34 and direct measuring systems (WMS), see p. 49

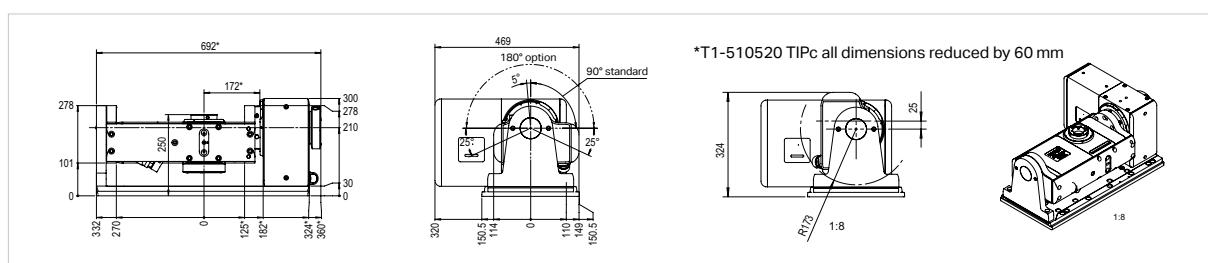





GLA.520hd



GLA.TOP2 with 2,000 Nm



GLA.TOP1 with 300 Nm

Counterbearing, incl. bearing journal

- Compact and stable counterbearing with large roller bearing
- Prepared for automatic clamping, oil connections from below and from side
- Max. permitted hydraulic pressure 220 bar (GLA.TOP2) or max. 150 bar (GLA.TOP1)
- Center height 0 +0.04 mm
- Delivered with bearing journal

Item No.	Clamping torque* [Nm]	Pull-out torque max. [Nm]	Weight [kg]								
			A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	d [mm]	e [mm]	
GLA.TOP1-110	300	not available	155	170	55	110	30	110	70	46.55	7
GLA.TOP1-150	300	available	155	210	55	150	70	110	70	46.55	9
GLA.TOP2-150-2	2,000	On request	227	240	80	150	30	179	105	64	21
all sizes											
GLA.HYD-fix		Hydraulic kit fix									
GLA.HYD-vario-2		Hydraulic kit vario**									

* at hydraulic pressure = 220 bar or 150 bar

** in combination with EA-520 or EA-530 and suitable counterbearing, the clamping torque is reduced by approx. 30% (applies to rotary table and counterbearing)

GLA.510hd-150, GLA.520hd-180

- 2x radial and axial bearings (as on rotary tables)
- Prepared for automatic clamping, oil connections from below and from side
- Max. permitted hydraulic pressure 220 bar
- Center height 0 +0.04 mm

Item No.	Clamping torque* [Nm]	Pull-out torque max. [Nm]	Weight [kg]								
			A [mm]	B [mm]	C [mm]	D [mm]	d [mm]	e [mm]			
GLA.510hd	800	2,000	170	215	150	150	80	34			
GLA.520hd	2,000	3,900	220	270	171	180	130	46			

* at hydraulic pressure = 220 bar

CYMAX hydraulic unit

Item No.	Designation	Technical data	Weight [kg]
AGG.CY1-2*	Cymax hydraulic unit	1 clamping circuit, 400 V (can be converted to 200 V)	
AGG.CY2-2*	Cymax hydraulic unit	2 clamping circuits, 400 V (can be converted to 200 V)	
AGG.LEIT-05-2	Hydraulic line with threaded fitting (supplied loose)	1 pair (2 pieces), 5 m	

* Preparing the machine for connection of the unit is the customer's responsibility

- 3x400 VAC (380–480 V, 50–60 Hz) can be converted to 3x200 VAC (200–280 V, 50–60 Hz)
- Control voltage U = 24 V DC
- Main pressure 10–125 bar



gripPACK


suitable only for clamping cylinder with 2.5 mm stroke (must be ordered separately)

Item No.	Designation	Technical data	Weight [kg]
AGG.510-ph	Pressure intensifier package, integrated into end cap, installed opposite motor (see image)	Clamping / unclamping: Manually via hand switch. No separate compressed air infeed necessary	
AGG.520-ph			

Suitable alignment elements

Item No.	Designation	Slot width	Weight [kg]
AUR.IX-12-16	Option (1 pair)	12/16	
AUR.IX-14-18	Standard (1 pair)	14/18	0.03
AUR.St-12		12g6	0.07
AUR.St-14	Alignment T-slot nuts, 1 pair	14g6	0.07
AUR.St-16		16g6	0.07
AUR.St-18		18g6	0.07

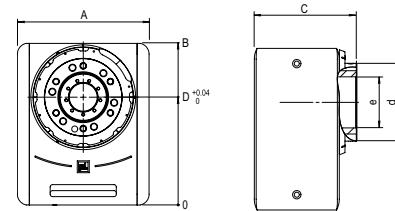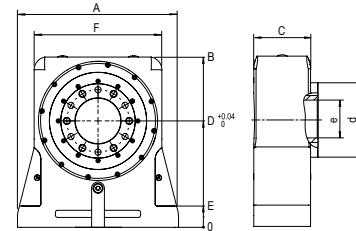

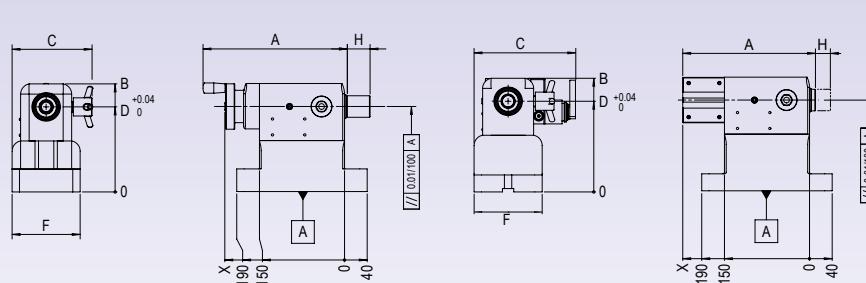

Manual version (right-hand)

measured without load, quill extended halfway

Standard design for all types = right-handed version (as shown)

		Item No.	Designation	A [mm]	B [mm]	C [mm]	F [mm]	H [mm]	Manual	pneumatic ²⁾	hydraulic ³⁾	Weight [kg]	X	✓
110	RST.COM-110m ⁴⁾	COMPACT tailstock	222	128	130	100	30	●				11		●
	RST.LIG-110m	LIGHT tailstock	255		142		40	●				20		●
	RST.LIG-110p ¹⁾	LIGHT tailstock	225	150	184	120	40		●			20		●
	RST.LIG-110h ¹⁾	LIGHT tailstock	229		168		40			●		24		●
150	RST.COM-150m ⁴⁾	COMPACT tailstock	222	168	130	100	30	●				16		●
	RST.LIG-150m	LIGHT tailstock	255		142		40	●				25		●
	RST.LIG-150p ¹⁾	LIGHT tailstock	238	190	184	120	40		●			25		●
	RST.LIG-150h ¹⁾	LIGHT tailstock			168		40			●		29		●
180	RST.LIG-180m	LIGHT tailstock	255		142		40	●				30		●
	RST.LIG-180p ¹⁾	LIGHT tailstock	238	220	184	120	40		●			30		●
	RST.LIG-180h ¹⁾	LIGHT tailstock			168		40			●		34		●
	RST.LIG-220m	LIGHT tailstock	255		142		40	●				35		●
220	RST.LIG-220p ¹⁾	LIGHT tailstock	238	260	184	120	40		●			35		●
	RST.LIG-220h ¹⁾	LIGHT tailstock			168		40			●		40		●
	RST.LIG-280m	LIGHT tailstock	255		142		40	●				42		●
	RST.LIG-280p ¹⁾	LIGHT tailstock	238	310	184	120	40		●			42		●
280	RST.LIG-280h ¹⁾	LIGHT tailstock			168		40			●		47		●
	RST.L-m	Left-hand version, manual										0.00		●
	RST.L-p	Left-hand version, pneumatic										0.00	●	
	RST.R-pmh	pneumatic, with manual lever valve										0.09	●	
Tailstock Option / Accessories	RST.L-pmh	Left-hand version, pneumatic, with manual lever valve										0.09	●	
	RST.L-h	Left-hand version, hydraulic											●	
	RST.Hub-p	Stroke monitoring for tailstock (pneumatic), free cable ends 5 m of which 4.5 m in flexible tubing; stroke 5 mm shorter										0.73	●	
	RST.Hub-h	Stroke monitoring for tailstock (hydraulic), free cable ends 5 m of which 4.5 m in flexible tubing; stroke 5 mm shorter										0.82	●	
	RST.SPI-MK2s	Fixed center, hardened steel				MK2								●
	RST.SPI-MK3s	Fixed center, hardened steel				MK3							0.37	●
	RST.SPI-MK2hm	Fixed center, HM use				MK2								●
	RST.SPI-MK3hm	Fixed center, HM use				MK3							0.37	●

All LIGHT tailstocks: Parallelism of quill axis to alignment groove adjustable thanks to **zentrifX** system (see operating manual)

¹⁾ Delivered as standard without manual lever valve. Can be ordered as option.

²⁾ Impact force approx. 660 to 2,000 N at 2 to 6 bar air pressure

³⁾ Impact force approx. 3,800 N at max. 24 bar oil pressure

⁴⁾ Delivered with center height +/-0.01 mm

Morse taper size (DIN 228)

- COMPACT = MK 2
- LIGHT = MK 3


CANNOT be retrofitted
 can be retrofitted

Suitable alignment elements

Item No.	Designation	Slot width	Weight [kg]
AUR.zX-12		12g6	0.10
AUR.zX-14	zentrifX alignment pin, 1 pair	14g6	0.10
AUR.zX-16		16g6	0.11
AUR.zX-18		18g6	0.12
AUR.St-12		12g6	0.07
AUR.St-14	Alignment T-slot nuts, 1 pair	14g6	0.07
AUR.St-16		16g6	0.07
AUR.St-18		18g6	0.07

Possible alignment elements


Alignment T-slot nuts



Revolving centers see p. 95



Hydraulic clamping cylinder standard

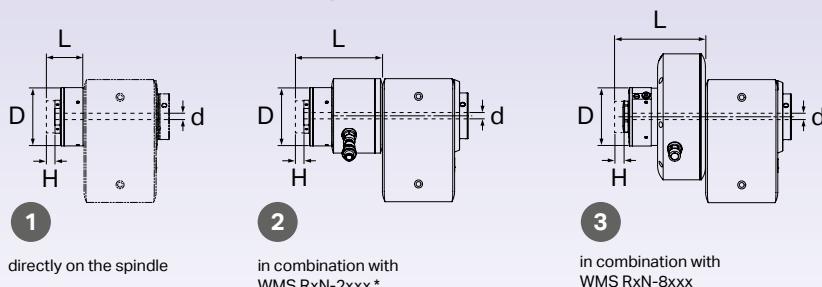


Pulling force max. 23 kN at max. permissible pressure of 120 bar

	Item No.	Effective direction Designation	H [mm]	Oil [cm³]	D [mm]	d [mm]	Connection thread	①	② *	③	Weight [kg]
x0x	SPZ.5xx-d2.5	hydraulic or pneumatic, double	2.5	5.2	102		M24x1.5	60	149		2.90
	SPZ.5xx-9		9	18.8							2.85
	SPZ.5xx-15		15								3.44
	SPZ.507-WMS2	Draw tube extension, for WMS.510-VOR2								•	
x1x	SPZ.5xx-d2.5	hydraulic or pneumatic, double	2.5	5.2	102	22	M24x1.5	52	141	136	2.90
	SPZ.5xx-9		9	18.8							2.85
	SPZ.5xx-15		15								3.44
	SPZ.510-WMS2	Draw tube extension, for WMS.510-VOR2								•	
	SPZ.510-WMS7	Draw tube extension, for WMS.510-VOR7								•	0.21
all types	SPZ.Awk-Vor	Preparation for presence check (control box optional, SPZ.Awk)									
	SPZ.Awk	Control box for presence check, incl. 10 m of hose material and wall penetration (in conjunction with SPZ.Awk-Vor)									


* If in combination with pL accessories, only on request (only possible for stroke of 2.5 mm and 9 mm)

Principle of operation

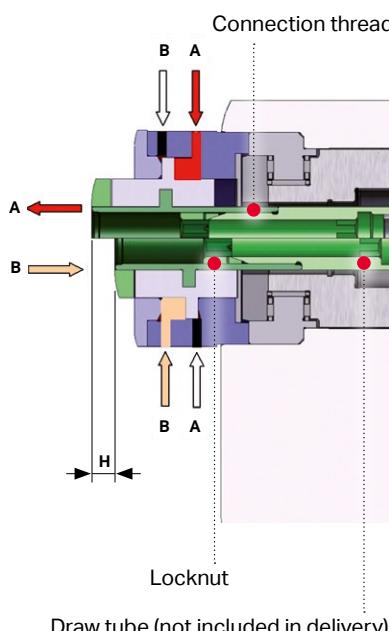

Control box for
presence check (SPZ.
Awk)


Hydraulically operated: Force diagram 10 to 120 bar (compression or tension; for suitable hydraulic unit **p. 42**)

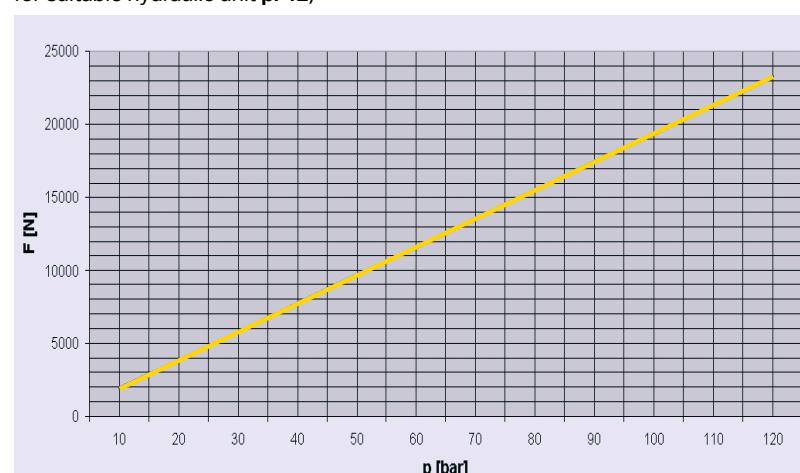

Pneumatic clamping cylinders with adjustable stroke

1

More information about clamping cylinder p. 44, rotary union p. 46, direct measuring system p. 49

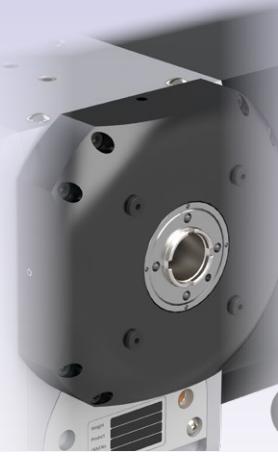

Pulling force max. 11 kN at max. permissible pressure of 10 bar

pL LEHMANN Item No.		Designation	H min* [mm]	Air [cm³]	D [mm]	d [mm]	Connection thread	L [mm] ①	Weight [kg]
x1x	SPZ.5xx-P	Pneumatic clamping cyl- inders	2.5	28	169 / 143x143	22	M24x1.5	57.2	
			9	100				63.7	
			15	167				69.7	
			2.5	28				48.7	
			9	100				55.2	
			15	167				61.2	



* Stroke of 2.5, 9 and 15 mm can be achieved with the same clamping cylinder

Center height increase on T-type rotary tables

For all combinations of possible spindle accessories.

Item No.	In- crease	Hydraulic & pneumatic				Hydraulic				Pneumatic						
		① WMS2	② WMS7	WMSC	① DDF	② WMS2 + DDF	② WMS7 + DDF	WMSC + DDF	① SPZ2.5	① SPZ9	① SPZ15	② WMS2 + SPZ2.5	③ WMS7 + SPZ2.5	② WMS2 + SPZ9	③ WMS7 + SPZ9	③ WMS7 + SPZ15
SPH.TIP1-40	40mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	80mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SPH.TIP2-40	40mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	80mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SPH.TIP3-50	50mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	100mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SPH.TAP1-40	40mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	without	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SPH.TAP2-30	30mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	without	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SPH.TAP2-60	60mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	without	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SPH.TOP1-40	40mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	70mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SPH.TOP1-100	100mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	without	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SPH.TOP2-30	30mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	without	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SPH.TOP2-60	60mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	without	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SPH.TOP2-120	120mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

WMS = direct measuring system, SPZ = clamping cylinder, DDF = rotary union

* pneumatic clamping cylinder with 2.5, 9 and 15 mm stroke

Overview &
Applications

System,
Facts & Service


Q-Line & M-Line
Tables

SPZ, DDF, RST
GLA, WMS, NOT, KAB

Tolerances
Technology & Glossary

Tooling

Ultra-compact, for air and oil

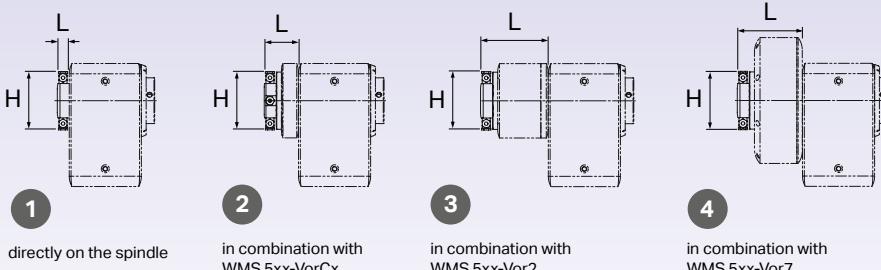

Rotary unions for rotary table

	Item No.	Flutes	Oil	Air	H [mm]	1	2	3	4	Weight [kg]
x0x	DDF.507-04	4	•	•	102	30	66	117	21	2.56
	DDF.507-04-C	4	•	•						2.69
	DDF.507-04-2	4	•	•	122					2.43
	DDF.510-04	4	•	•		102				2.58
x1x	DDF.510-06	6	•	•	102	21				2.80
	DDF.510-06-C	6	•	•			60			2.93
	DDF.510-04-2	4	•	•	122		119			2.44
	DDF.510-04-7	4	•	•		102				2.89
	DDF.510-06-7	6	•	•	122				114	3.10

All rotary unions can be used on all T-type rotary tables without increasing the center height unless equipped with direct measuring systems.



For center height increase on T-type rotary tables, see p. 45

The center height changes only if the rotary union is used on a direct measuring system.

Rotary unions (DDF) for counterbearing (GLA)

	Item No.	Flutes	Oil	Air	H [mm]	L [mm]	Weight [kg]
x0x	DDG.507-04-TOP	4	•	•	102	30	2.48
x1x / x2x	DDG.520-04-TOP	4	•	•	102	44	3.66
x1x / x2x	DDG.520-06-TOP	6	•	•	122	44	4.11

DDF on GLA for T-type rotary table



4 connections, at rear

DDF on GLA for rotoFIX



2 connections facing up




2 connections facing down

All rotary unions:
Channel size $\varnothing 3.5$ mm, permissible
pressure 250 bar

DDF.TxP1.Lx-04(p)


p = pneumatic clamping cylinder
without = DDF and hydraulic clamping
cylinder

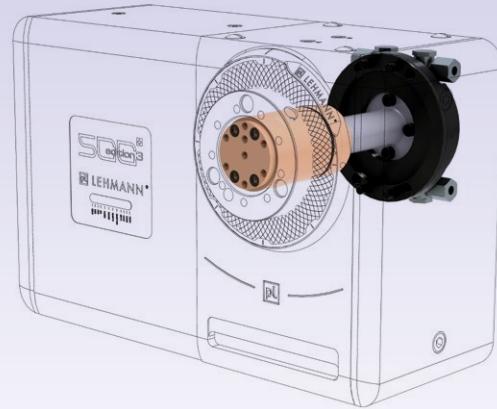

Handshake for T-type rotary tables

The following options (adapter plate and tubing) are required in order to feed the rotary unions on the rotary axis via the tilting axis:

	Item No.	Left	Right	A	B	Remark
TxP	DDF.TxP1.Lx-04(p)	•	•	•		not possible for version TxP1c
	DDF.TxP1.Rx-04(p)		•	•		not possible for version TxP1c
	DDF.TxP2.Lx-04-2(p)	•		•		not possible for versions TxP2c and Oxx
	DDF.TxP2.Lx-06-2(p)	•		•		not possible for versions TxP2c and Oxx
	DDF.TxP2.Rx-04-2(p)		•	•		not possible for versions TxP2c and Oxx
	DDF.TxP2.Rx-06-2(p)		•	•		not possible for versions TxP2c and Oxx
	DDF.TxP3.Lx-04-2(p)	•		•		
	DDF.TxP3.Lx-06-2(p)	•		•		
	DDF.TxP3.Rx-04-2(p)		•	•		
	DDF.TxP3.Rx-06-2(p)		•	•		
TOP	DDG.TOP1-04(p)	•	•		•	
	DDG.TOP2-04-2(p)	•	•		•	If Oxx in addition, DDF.WMS-7-TxP needed
	DDG.TOP2-06-2(p)	•	•		•	

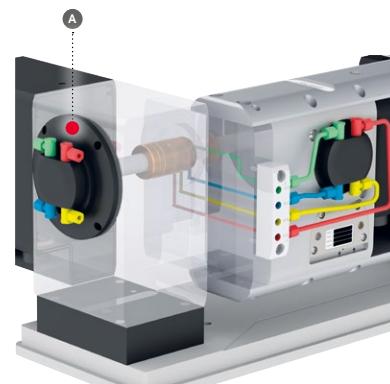


Handshake
Medium transfer from
tilting axis to rotary axis
(rear)



Handshake
Medium transfer from
tilting axis to rotary axis
(front)

Essential for handshake with WMS.5xx-Vor7

Item No.	Left	Right	Remark
DDF.WMS-7-TxP	•	•	Adjustment of strip, rotary table adapter plate

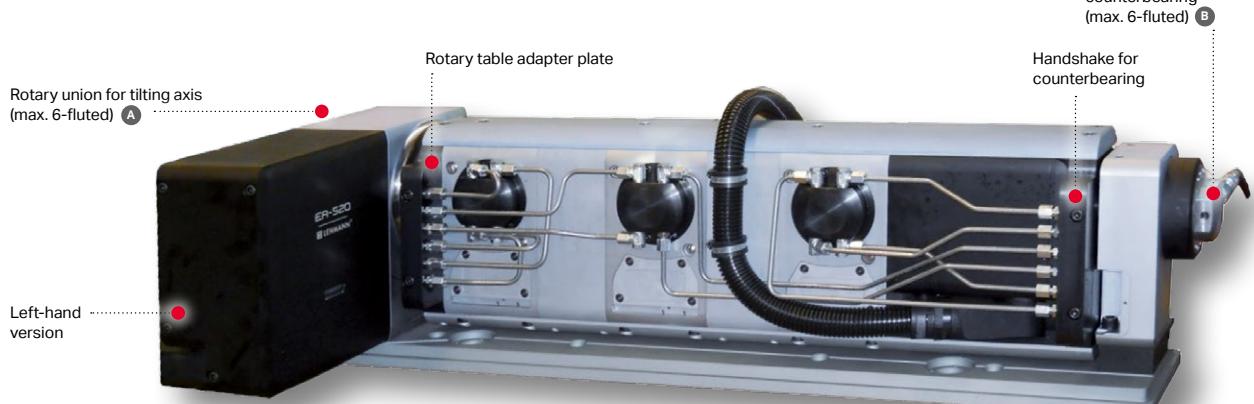

Measuring / recording

Measuring and recording the angular accuracy, important application instructions



Measuring and recording

Rotary tables with direct measuring systems are supplied with the original report for the encoder. Additional measuring and recording optionally available. Other types of measurements and reports on request.

Encoders for AC motors

A wide range is available for motors from Fanuc, Siemens, Heidenhain, Mitsubishi, etc. See the main catalog 500.

Measuring to ISO 10 360-3

See the tests starting on **p. 52**. Additional documents and certificates available on request.


Motor data

	Motor type	Technology	Rating [W]	Max voltage [VDC]	Peak current [A]	Feedback	Signal	Line count [pulses/rev]
x0x	KA511TXX	DC	110	75	18	Tacho	7V/1000RPM	-
	KA511XS0	DC				Encoder	TTL	2000
	MOT.NA-PD4-3	SM						
			only for pL Q-Line					
x1x	KA720TXX	DC	200	80	25	Tacho	7V/1000RPM	-
	KA720XS0	DC				Encoder	TTL	2000
x2x	KA730TXX	DC	300	75	40	Tacho	7V/1000RPM	-
	KA730XS0	DC				Encoder	TTL	2000

Cable

Item No.	Technology	Designation	Manufacturer
KAB.S1-0.5w-WEa2-2	DC	0.5m, Sanyo, tilt, direct measuring system	Werth
KAB.S1-1.3w-WEa-2	DC	1.3 m, Sanyo, direct measuring system	Werth
KAB.S1-1.5w-ZEa	DC	1.5m, Sanyo, direct measuring system	Zeiss
KAB.S1-2.0w-HEa	DC	2.0m, Sanyo, direct measuring system	Hexagon
KAB.S1-6.0w-DSa	DC	6.0m, Sanyo, direct measuring system	Dr. Schneider
KAB.S1-6.0w-o-2	DC	6 m, without plug, Sanyo, WMS	All
KAB.NAa-3.0-Qli-2	SM	3 m, Nanotec	pL Q-Line

Accuracy comparison µm/angular seconds

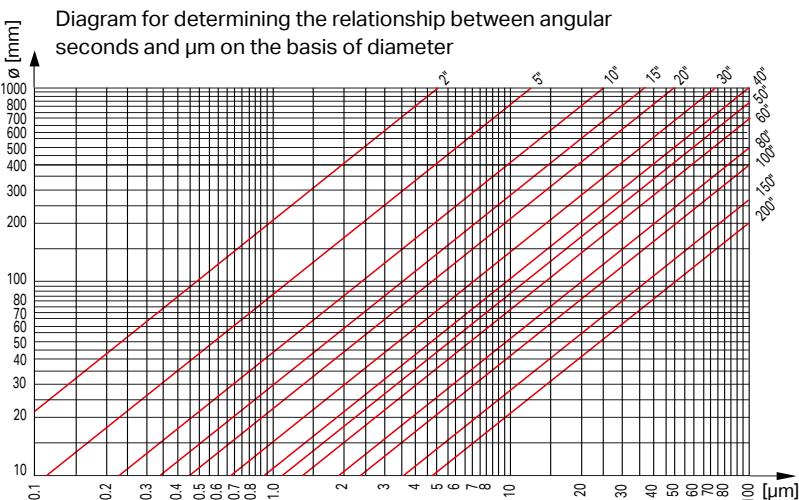

Measuring method used to determine the gear unit's accuracy to VDI/DGQ 3441 or ISO 230-2

- Measured at operating temperature of the unit after 5 warm-up cycles
- 5 measuring cycles
- 24 measuring points (15° increments)
- Acceleration 500°/s²
- All measured values apply in unloaded condition at room temperature approx. 22 °C
- The values WITHOUT load apply

Attention: Due to the influence of environmental factors during the measurement (temperature, vibration, etc.), the recorded measurement error may exceed the catalog limit value by up to 10%.

Available direct measuring systems

with signal TTL or 1Vpp



Rear view with angular position measuring system 'compact'

Selecting the direct measuring system

Encoder kit Item no.	Preparation Item no.	System	System**	Indexing accuracy		Type	Read head
WMS.TSM-75		1Vss	Renishaw Line count 11840, or 20 µm pitch	normal	comp.*	Tonic RESM	1
WMS.TXM-75				± 25"	± 8"		
WMS.VXM25-75.2	WMS.50x-Vor2CX	TTL***		± 10"	± 3"	Tonic REXM	
WMS.VXM25-75.2T				± 2.5"	± 1"		
WMS.VXM100-75.2	WMS.50x-Vor2	1Vss	Heidenhain Line count 18,000	± 5"	RON 285	2	built-in
WMS.VXM100-75.2T				± 2.5"			
WMS.285	WMS.50x-Vor2	1Vss	Heidenhain Line count 18,000	± 5"	RON 287	2	built-in
WMS.287				± 2.5"			

* Sine error compensated for individually by customer

** for other systems from HEIDENHAIN or MAGNESCALE see main catalog 500

*** no spindle clamping possible

Dimensions

Length L [mm]	x0x				x1x			
	Renishaw		Heidenhain		Renishaw		Heidenhain	
	❶	35.5	88.2	29.9	88.5	❶	59.9	118.5
❷	65.5	118.2	59.9	118.5	59.9	118.5	59.9	118.5



Required TTL input frequency on machine side

Speed [rpm]	Type of measuring head													
	Measuring head resolution [nm]													
	5000	1000	500	200	100	50	40	25	20	10	5	2.5		
	27.502	5.500	2.750	1.100	0.550	0.275	0.220	0.138	0.110	0.055	0.028	0.014		
	Measuring head resolution [arc sec]													
1	0	1	2	6	12	25	31	49	61	120	250	490		
2	0	2	5	12	25	49	61	98	120	250	490	980		
5	1	6	12	31	61	120	150	250	310	610	1,200	2,500		
10	2	12	25	61	120	250	310	490	610	1,200	2,500	4,900		
15	4	18	37	92	180	370	460	740	920	1,800	3,700			
20	5	25	49	120	250	490	610	980	1,200	2,500	4,900			
25	6	31	61	150	310	610	770	1,200	1,500	3,100				
30	7	37	74	180	370	740	920	1,500	1,800	3,700				
40	10	49	98	250	490	980	1,200	2,000	2,500	4,900				
50	12	61	120	310	610	1,200	1,500	2,500	3,100					
60	15	74	150	370	740	1,500	1,800	2,900	3,700					
70	17	86	170	430	860	1,700	2,100	3,400	4,300					
80	20	98	200	490	980	2,000	2,500	3,900	4,900					
90	22	110	220	550	1,100	2,200	2,800	4,400	n. pos- sible					
100	25	120	250	610	1,200	2,500	3,100	4,900						

100 = Standard for system with 1 read head

25 = Standard for system with 2 read heads

Resolution is valid with 4-time evaluation on the machine side (otherwise value is 4x worse)


* Reading example: 100 nm > 250 kHz = 20 rpm



RENISHAW VIONIC with REXM ring
(here with 2 read heads)

High geometric accuracies as standard, combined with a high level of rigidity and stability


(*) values = increased accuracy. Item no. GEO.5xx-GEN

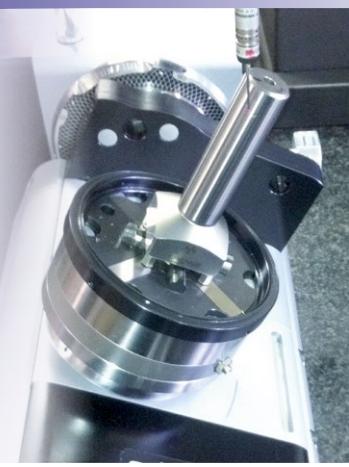


The tolerances given below apply under the following conditions:

1. The rotary table is mounted as specified in the commissioning instructions
2. The measurement is carried out on a calibrated granite plate (all machine errors are excluded)
3. The rotary table is not subjected to any outside thermal influences (sun, fans, heaters, etc.)
4. Prior to the measurement, the rotary table and the measuring and test equipment have been in the same environment for at least 24 h
5. All measured values are determined for an unloaded rotary table


Geometry of EA rotary tables

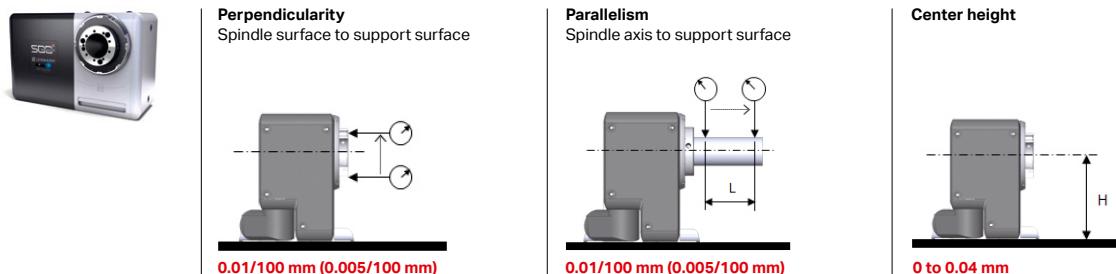

Geometry of EA rotary tables with rotoFIX

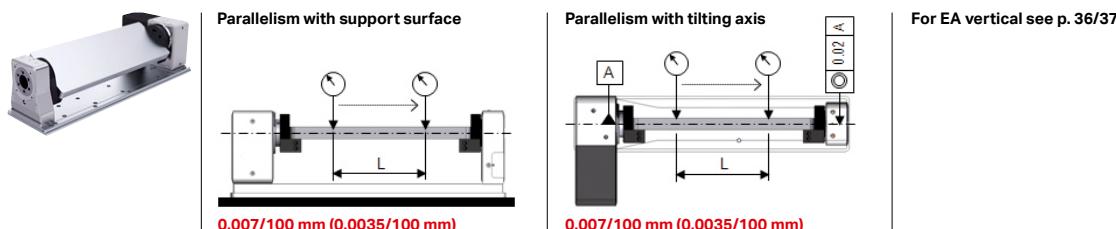


Geometry of M-rotary tables (only on request)

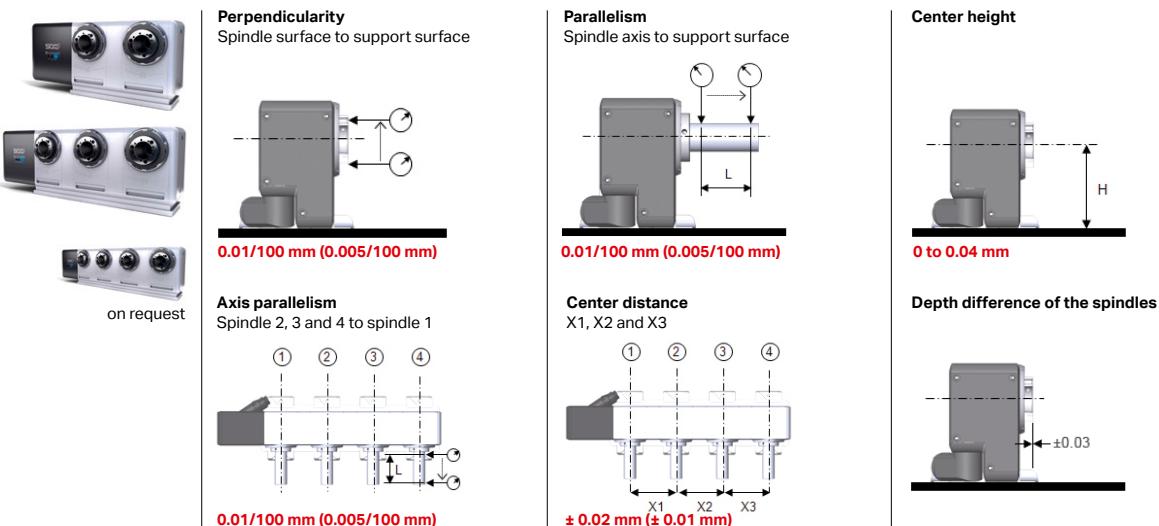

And for the most stringent requirements:
1/2 tolerance as an option


(*) values = increased accuracy. Item no. GEO.5xx-GEN

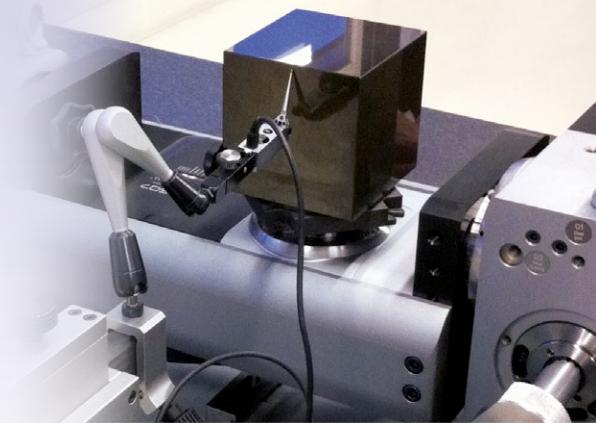

Geometry of TF and T1 rotary tables




Perpendicularity
Rotary axis to tilting axis



0.01/100 mm (0.005/100 mm)


Parallelism
Spindle surface to support surface



0.01/100 mm (0.005/100 mm)

Tilt drift

Change in the angle between the rotary axis and tilting axis during the tilting movement from -90° to 0°




0.01/R150 mm (0.005/R150 mm;
applies only to T1)


Geometry of T2 to 3-rotary tables (only on request)



Perpendicularity
Rotary axis to tilting axis of spindle 1




Center distance
X1, X2 and X3




± 0.02 mm (± 0.01 mm)

Axis parallelism
Spindle 2 and 3 to spindle 1




Parallelism
Spindle surface to support surface




Tilt drift

Change in the angle between the rotary axis and tilting axis during the tilting movement from -90° to 0°



0.01/R150 mm (0.01/R150 mm)

For M- and T-type rotary tables



±0.05°


±0.05°

±0.05°

For all rotary tables

Radial and axial run-out for all rotary table versions


- Measured at spindle nose
- Axial run-out at largest diameter
- Radial run-out of the inner bore as well as centering \varnothing





0.006 mm (0.003 mm)

For high-precision measurements

- Excellent repeatability
- Minimal thermal growth
- Fast positioning
- Horizontal or vertical use possible

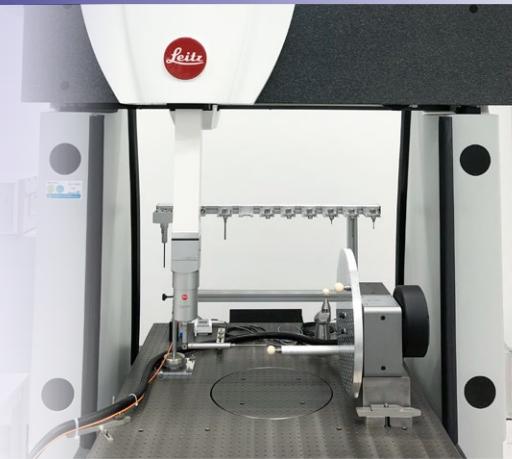

Performance characteristics to ISO 10360-3 determined at an accredited testing facility on a high-precision coordinate measuring machine.

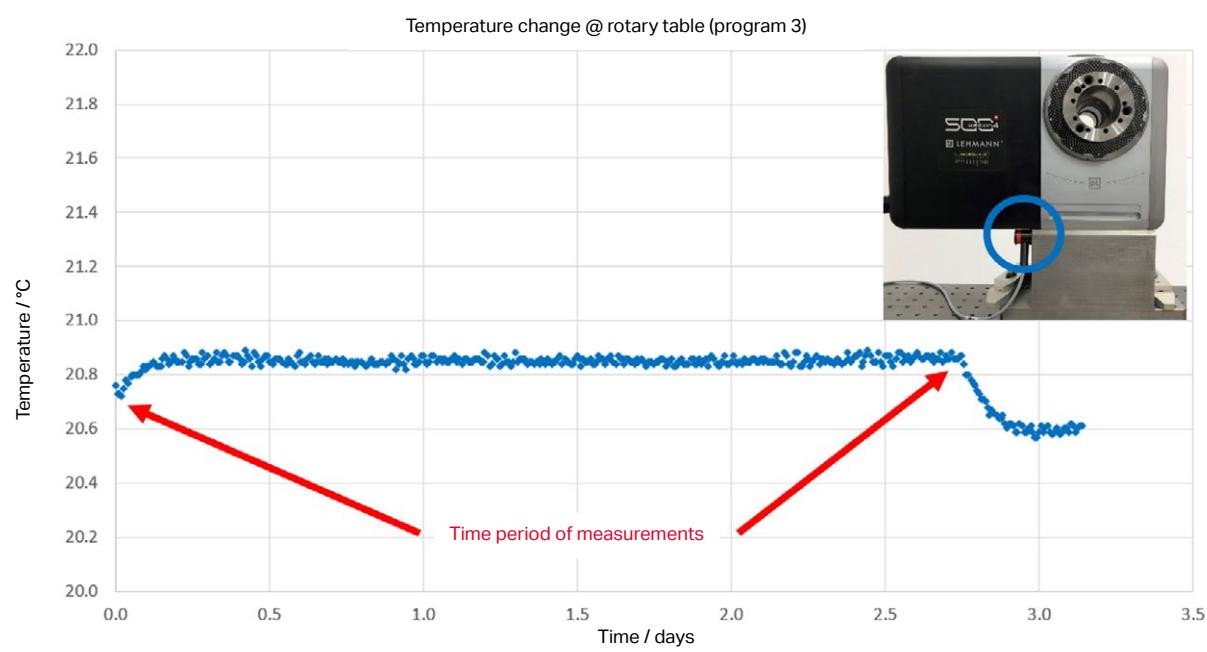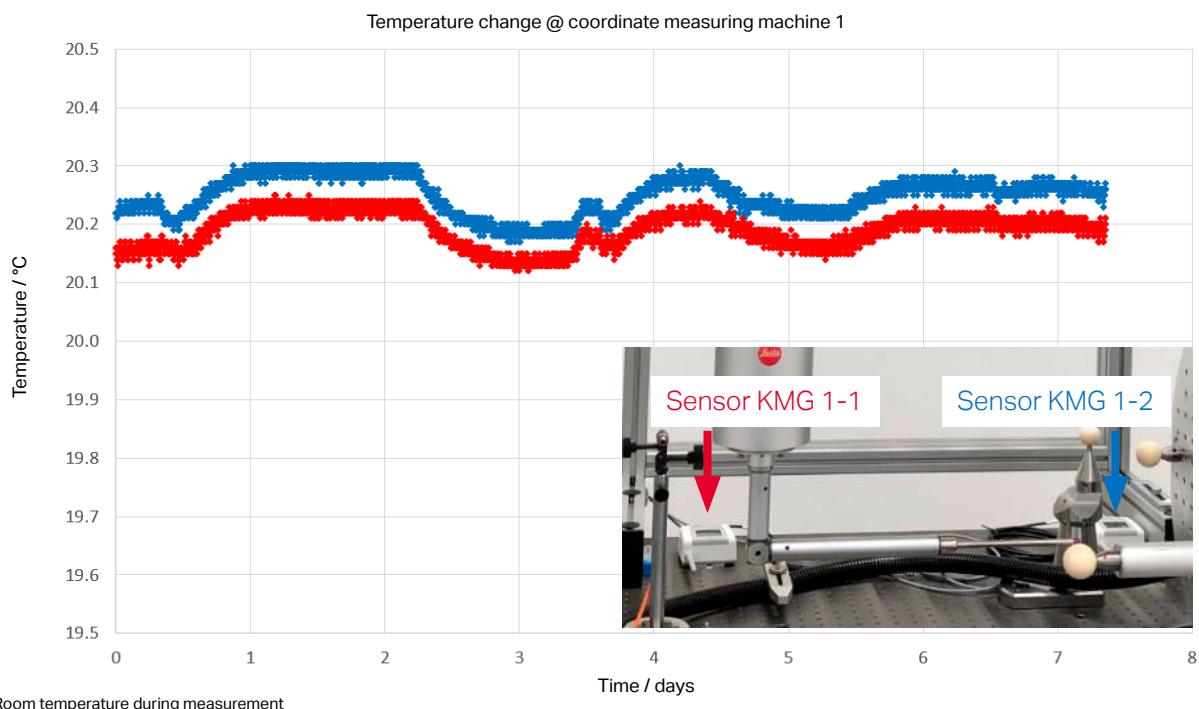

Investigation of the effects of loads, cycles, duration, clamping, direct measuring systems, etc.



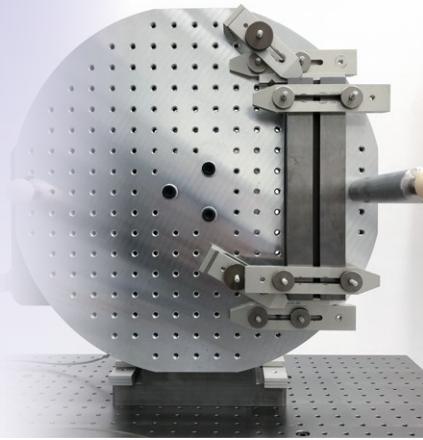


Image right: Example of determining the performance characteristics when rotary table is loaded with an eccentrically positioned weight (approx. 5.5 kg)

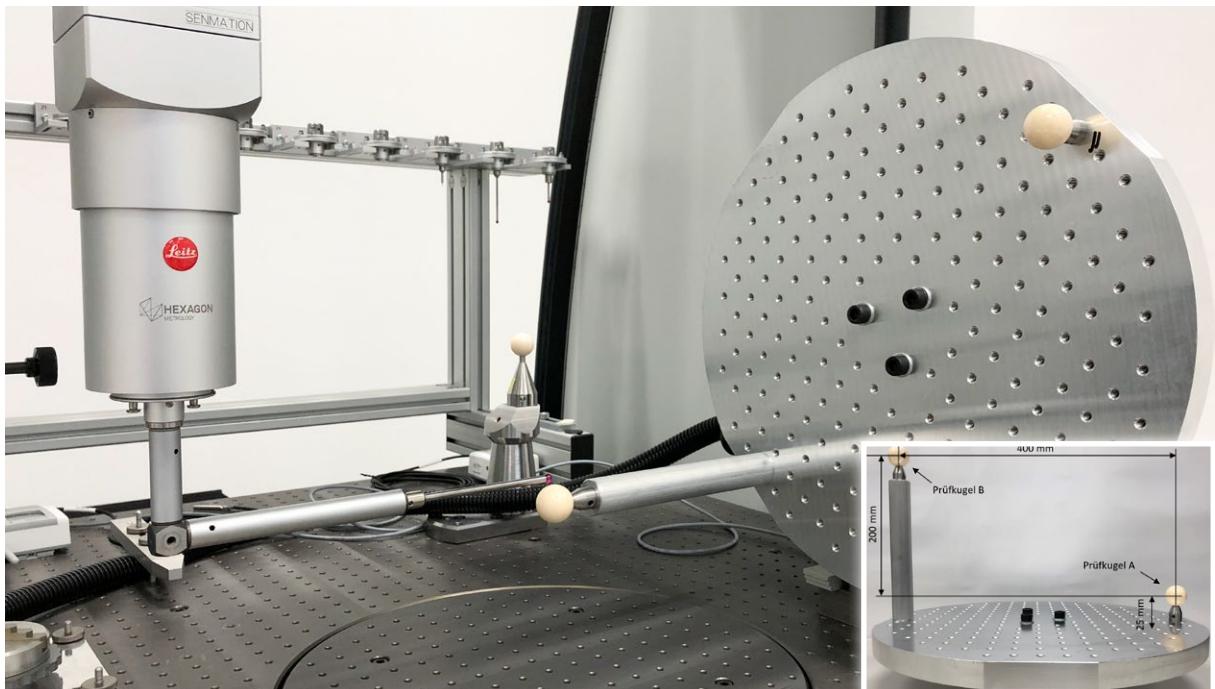

Leitz PMM-C 12.10.07 - EA-510

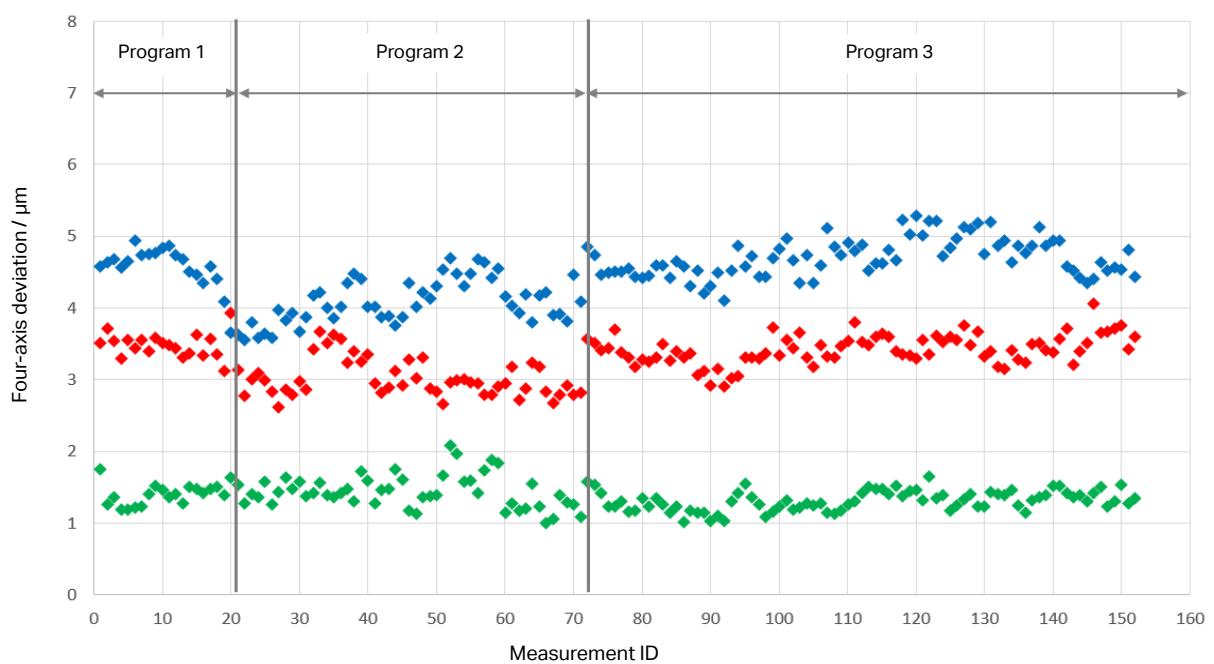

All values uncompensated

◆ FR = Radial error


◆ FT = Tangential error

◆ FA = Axial error


Stress test «4-axis deviation to ISO 10 360-3»

- Without load, horizontal axis position
- With centered load in horizontal axis position
- With eccentric load in horizontal axis position
- Each with and without spindle clamping

Wobble error constant? Components

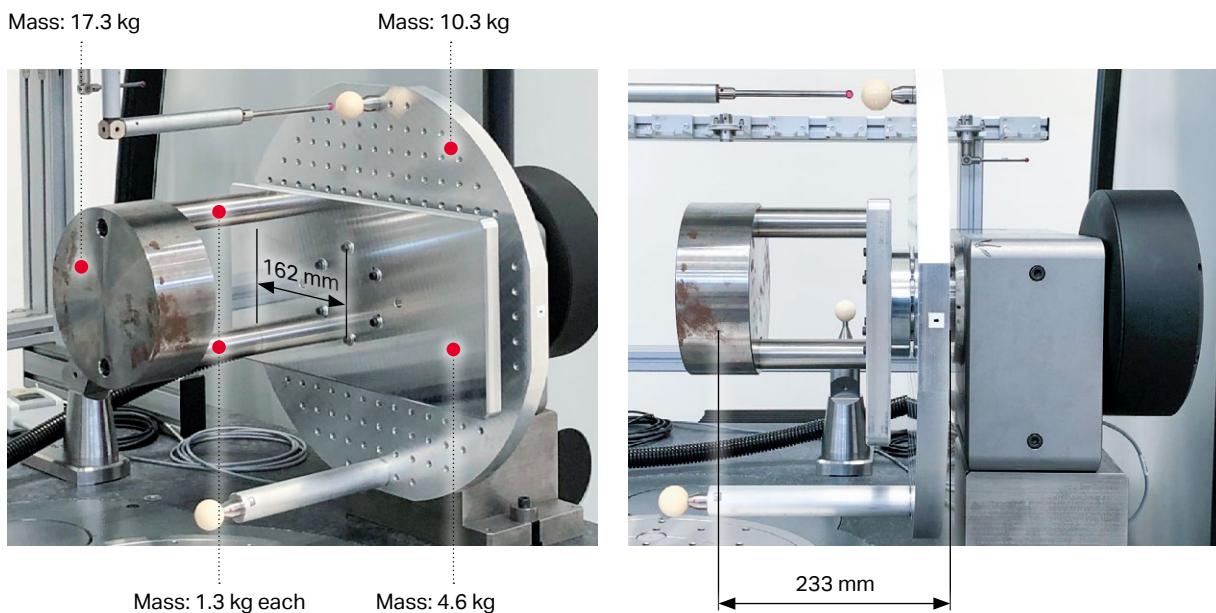


Without load – WITH direct measuring system, WITHOUT clamping

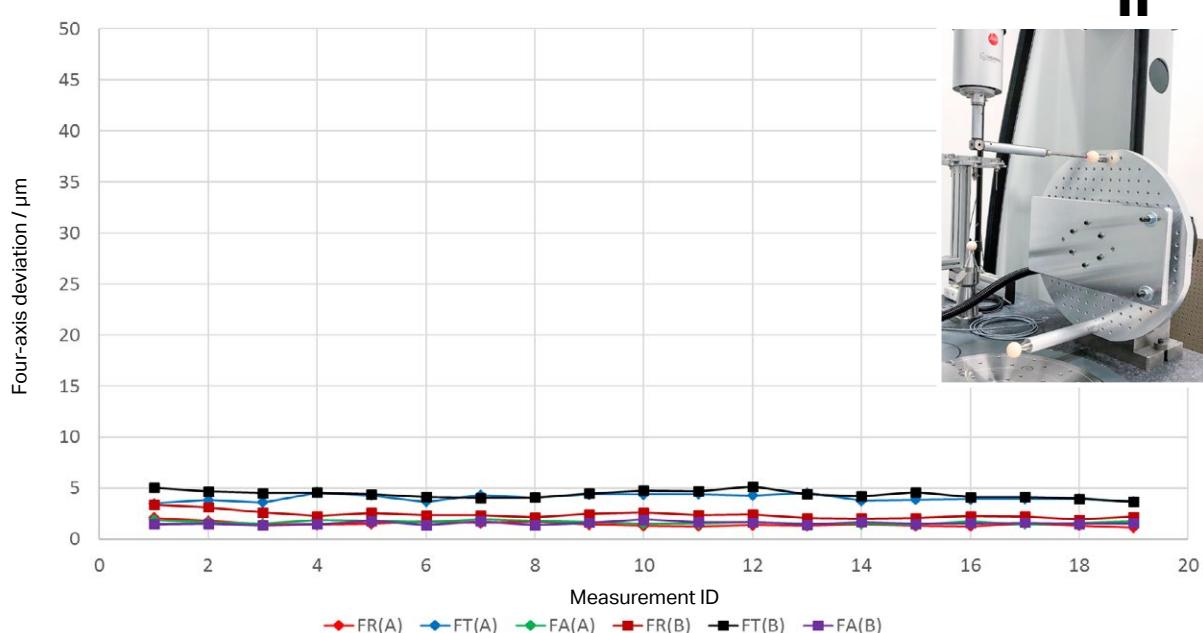


Confirmed under different load conditions at a speed of 8 rpm during many measuring cycles in an extended test: high thermal and mechanical stability and repeatability

With centered load – WITH direct measuring system, WITHOUT clamping

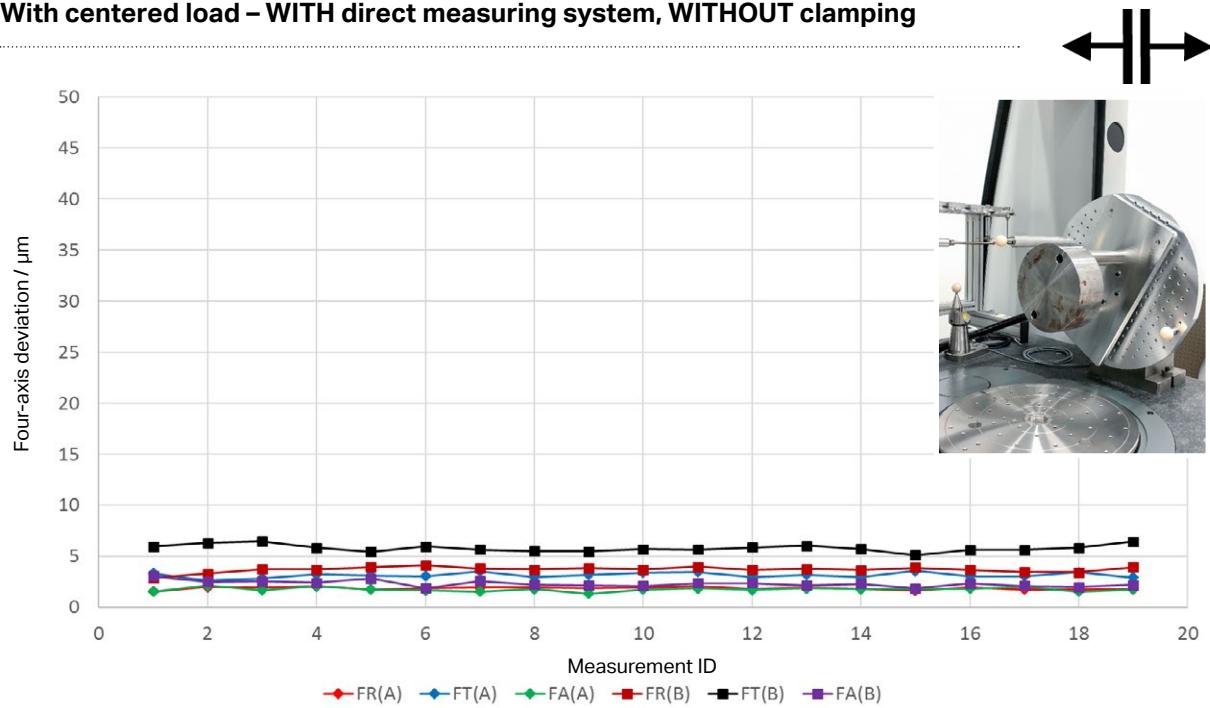


With eccentric load – WITH direct measuring system, WITHOUT clamping

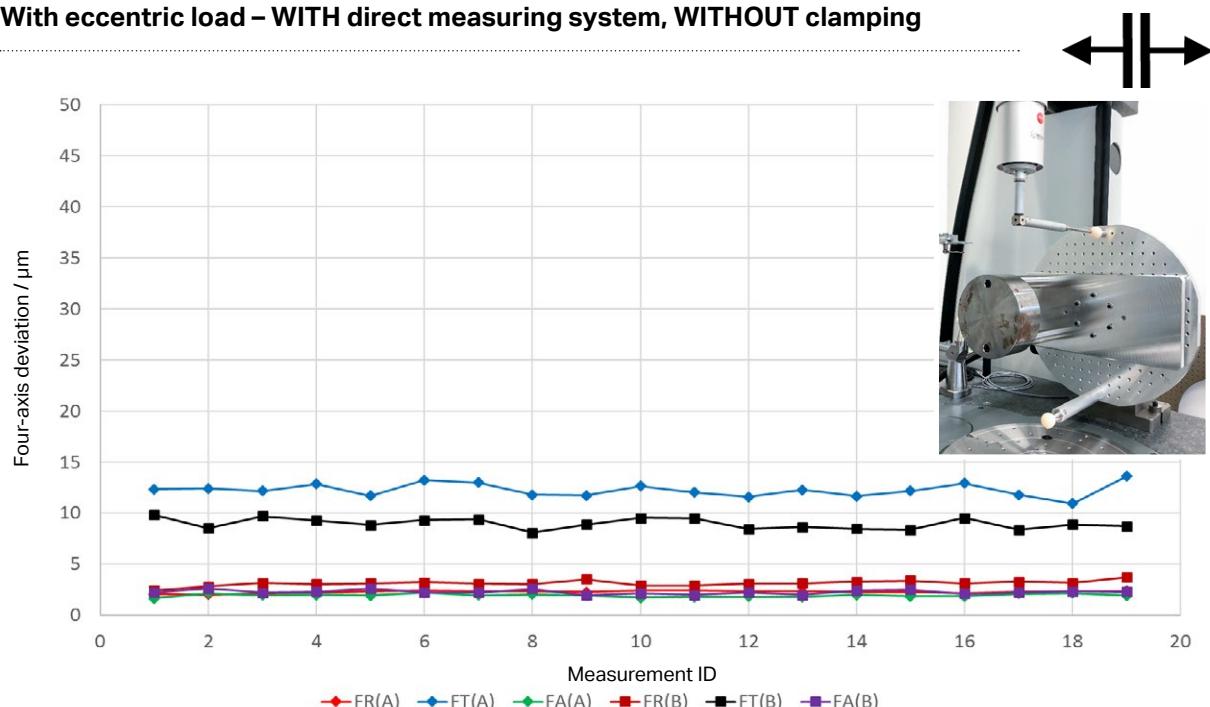

Confirmed for other measurements and in vertical axis position by specific test:
Repeatability on cylindrical mandrel

Key data principle

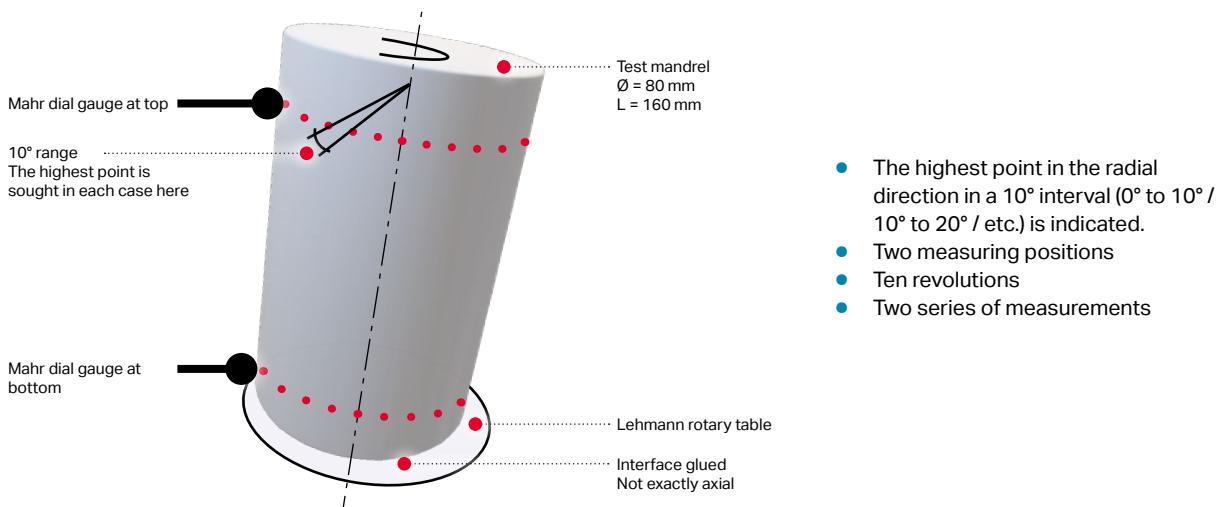

Setup



Use of measuring means

Version with maximum resolution:

Increment value 0.1 μm

Extensive measurement functions for:

- Static measurements such as lengths, spacings and length differences
- Dynamic measurements such as radial run-out, straightness and flatness using MAX / MIN / MAX-MIN functions




Technical data

	Dial gauge 1	Dial gauge 2
Type		1087 R-HR
Measuring span	mm	12.5 25
Increment value	mm	0.0001, 0.0005, 0.001, 0.002, 0/005, 0.01
Scale display range	mm	$\pm 0.002, \pm 0.01, \pm 0.02, \pm 0.04, \pm 0.1, \pm 0.2$
Error limit	mm	0.0018 0.0022
Error limit over 50 increments	mm	0.0005
Repeatability	mm	
Measuring force	N	0.65-0.9 0.65-1.15
Standard		Factory standard
Lifting cap at end of measuring pin		•


An excerpt from many results

Performance characteristics to ISO 10360-3 by a well-known machine manufacturer on a high-precision coordinate measuring machine.

Maximum span of the 36 measuring points over the 10 revolutions = 0.003 to 0.005 mm

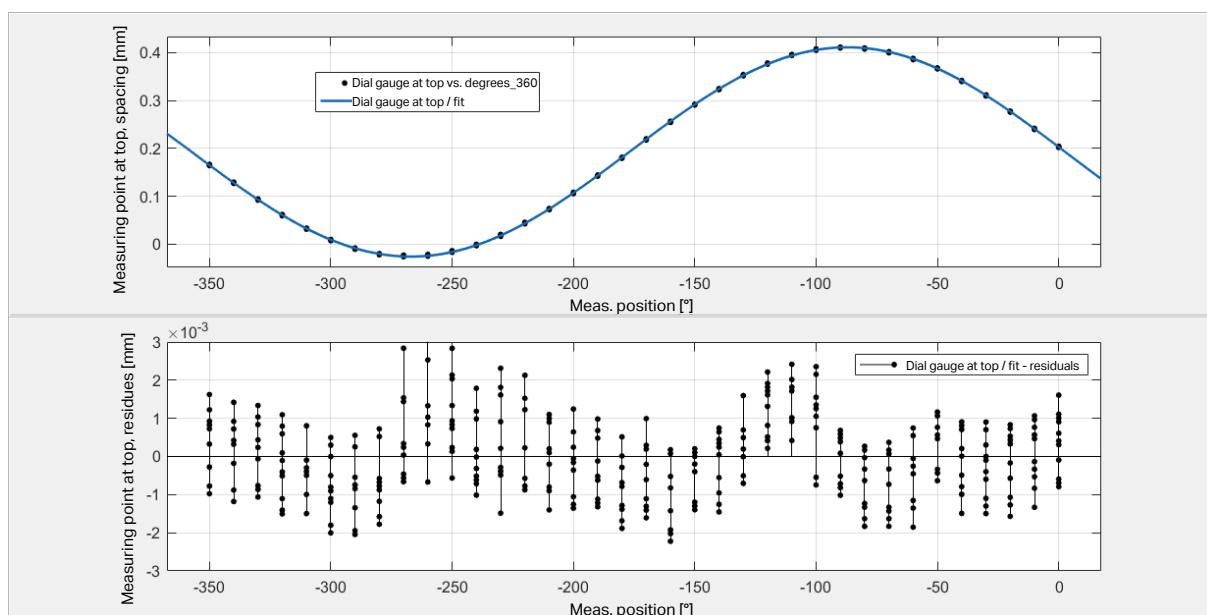

Four-axis deviation EA-511.L-mt (FT yellow: WMS.VXM20.1, FT green: WMS.VXM20.2)
Stress test (initially with EA-507, without insulation, with WMS.287 +/- 2.5")

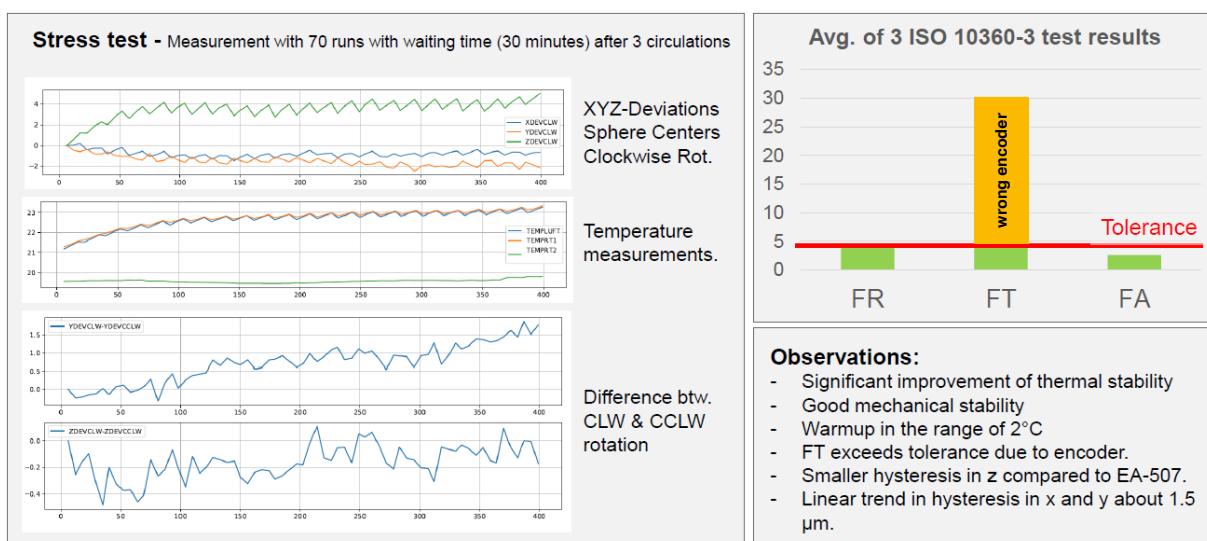

Basics of the drive data


All drive data of pL LEHMANN rotary tables (30–40) has been designed for the following standard

spindle loads in accordance with DIN/VDE 0530 as follows:


- For intermittent service S3 duty cycle 20%
- Cycle duration 1 minute

Any other conditions require adjustment of the drive data (acceleration, jerk limitation, speed).

EA-type rotary tables

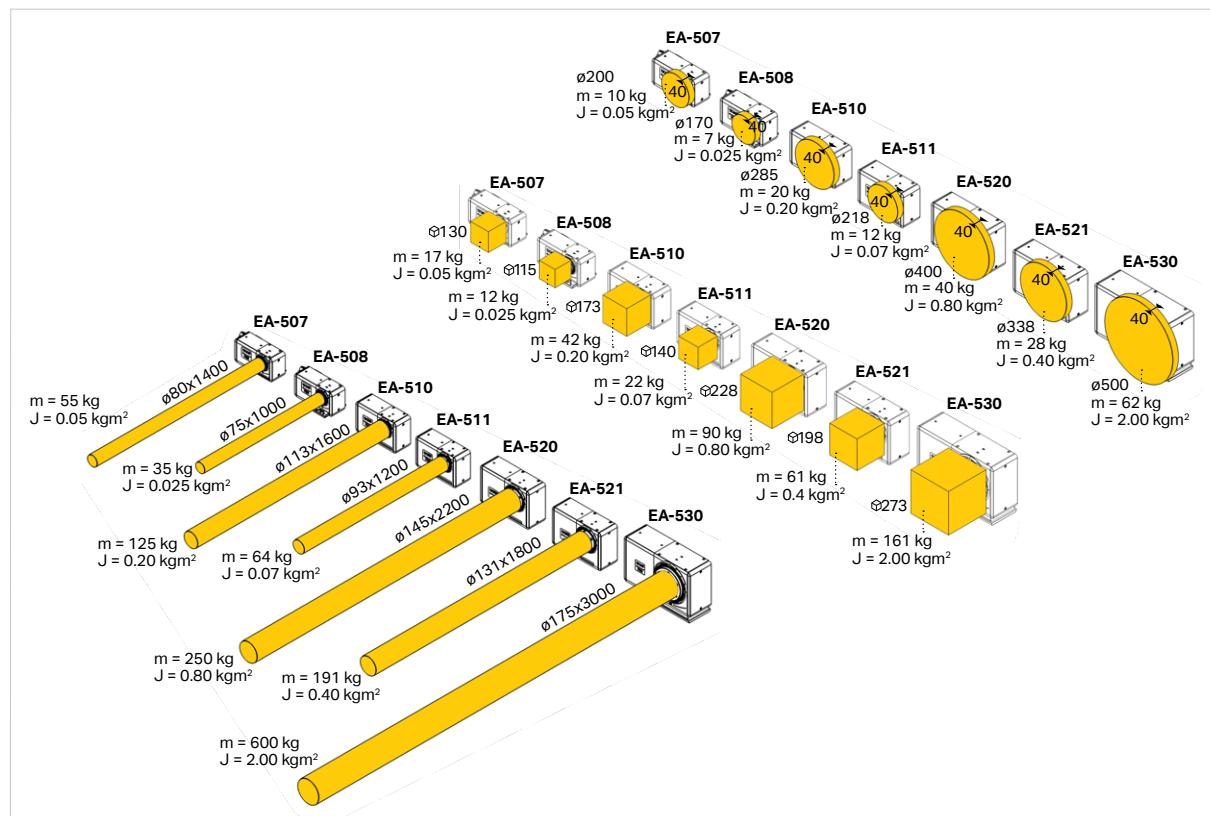


Mx-type rotary tables

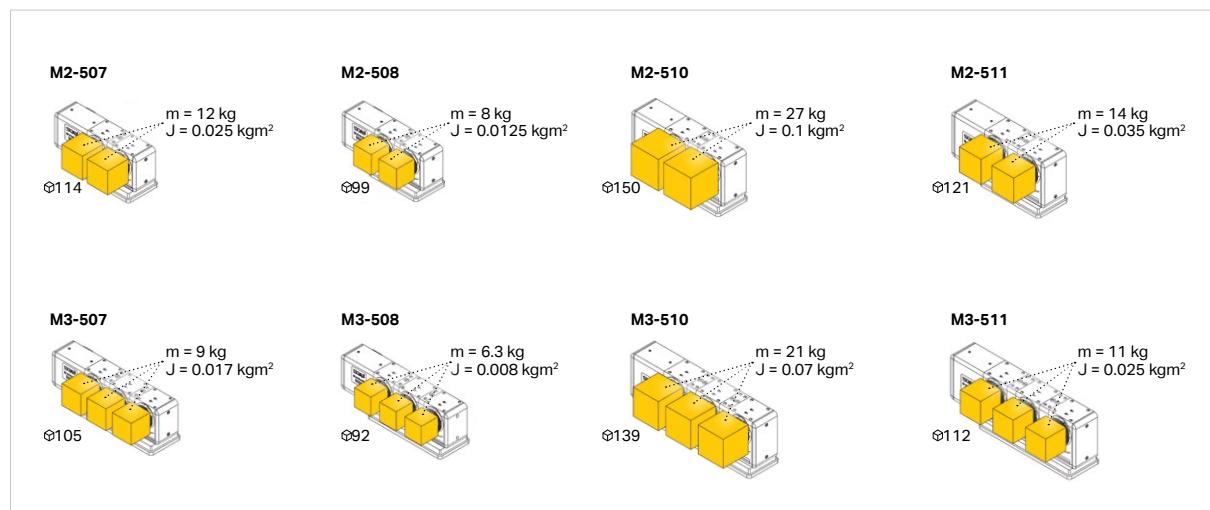


Reference values for duty cycle (ED)

- For normal rotary table work such as milling / boring (mainly positioning) approx. 20%.
- For milling / boring in intensive mixed operation (positioning / feed machining): approx. duty cycle 40%
- For profile and depth grinding approx. ED 60% / simultaneous machining, 5-axis
- For engraving: approx. duty cycle 80–100%
- Metrology applications: approx. duty cycle 10–100%


Tx-type rotary tables (TIP, TAP, TOP)

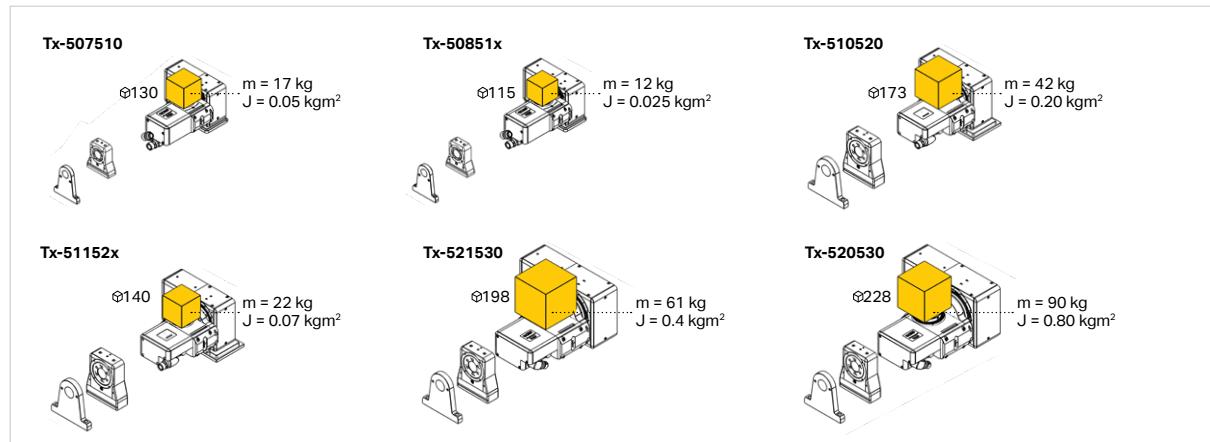

T1-type rotary tables (TGR)

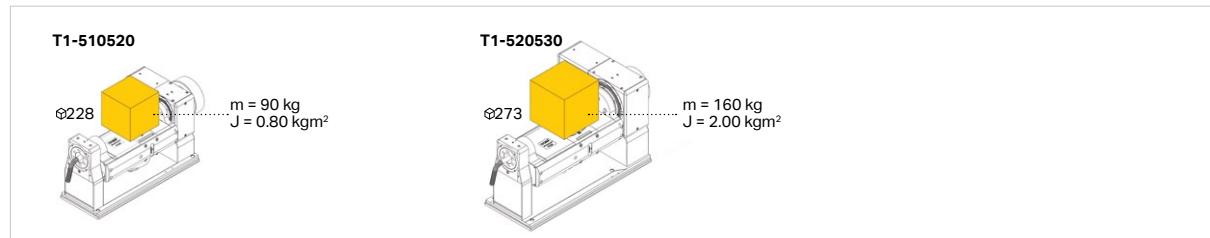

T2 to 3-type rotary tables (TOP.x)

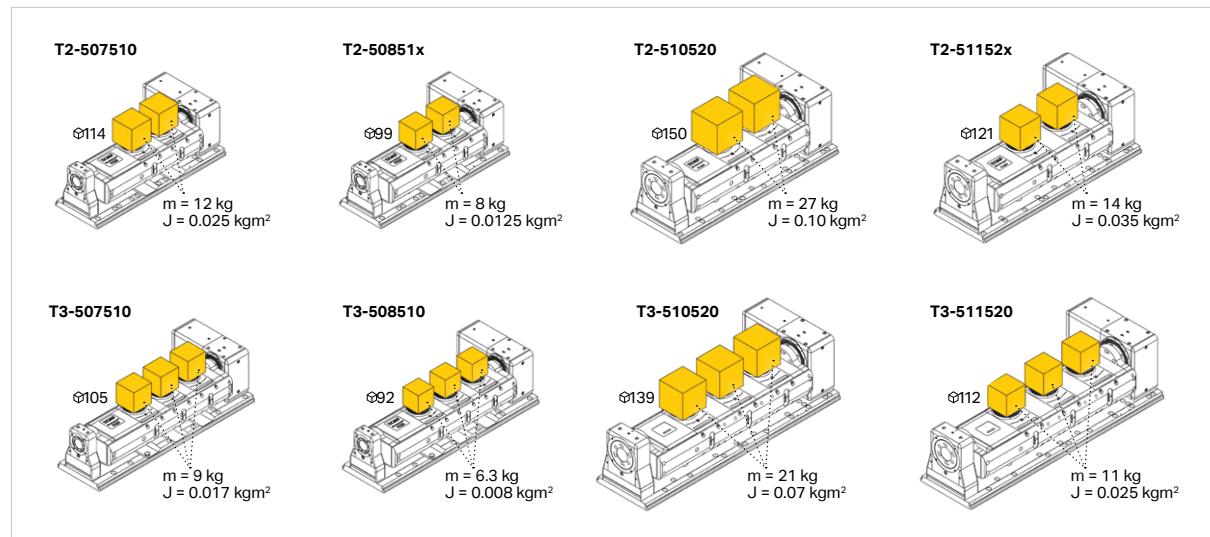

Definition of the terms used in this catalog

1 Drive data

The term «drive data» always refers to speed, acceleration as well as jerk limitation.

2 Gear unit

Gear unit load ($M_{\text{gear max.}}$) [Nm]

...refers to the maximum permissible mechanical torque at a spindle speed of 1 rpm.

Feed torque (M_{feed}) [Nm]

...refers to the available torque at a speed of 1 rpm, corresponding to the maximum permissible gear unit load. Depending on the motor used and/or duty cycle, however, it can be correspondingly lower.

Eccentric spindle load ($sl_{\text{eccentric.}}$) [Nm]

The eccentric load catalog* corresponds to

- 0 Nm (standard load always centric) for EA- and M-type rotary tables as well as rotary axes of T-type rotary tables
- The maximum torque for T-type rotary tables, which affects the tilting axis in the form of the intrinsic load of the rotary axis as well as that of the cubic standard load. Please refer to the respective parameter list, catalog values.

For T-type rotary tables, the eccentric load usual* is identical to the gear unit load with sls . For an EA rotary table, this torque is equal to the value resulting from the maximum eccentric load when using a rotoFIX Alu with a standard load. Please refer to the respective parameter list for usual values.

The eccentric load max load* corresponds to the maximum mechanical torque which can still be transmitted without any damage using the gear unit at a minimum speed of approx. 10 rpm. Please refer to the respective parameter list, max load values.

* For definitions please refer to «Geometry / Integration» p. 63



Center of gravity shift without and with load.
The greater the red center of gravity, the greater the gear unit load in the tilting axis is. The blue arrow shows the direction in which the center of gravity moves from «without load» to «with load».

pL standard spindle load ($sls = sl_{\text{standard}}$) pp. 30–40 and 58–59 [kg]



...refers to the pL spindle load defined as standard, derived from practice, covering approximately 90% of all applications. All drive data and parameter lists are designed for the cubic pL standard load. All masses moving within this volume (workpiece including device) and clamped coaxially to the rotary axis can be moved using the standard drive data. Eccentrically arranged standard pL spindle loads may require a reduction of the drive data.

Standard moment of inertia (J_{standard}) pp. 30–40 and 58–59 [kgm²]



...refers to the resulting moment of inertia due to the defined pL standard load and its shape, if the load is clamped coaxially relative to the rotary axis. The usual J ratio between load and motor is generally 1:1 or less (e.g. 0.5:1).

Max. perm. moment of inertia (J_{max}) [kgm²]

...corresponds to 10x the standard moment of inertia (J_{standard}). In most applications, this moment of inertia is not exceeded even with large workpieces. It should also be noted that the J ratio of 10:1 is NOT exceeded with any motorized model. Higher J ratios can of course be shifted, but this does require the necessary adjustments (upon request).



EA-510



Function explanations, limit values and conditions


minimize your risks

3 Gear accuracies

All accuracy data apply to an unloaded rotary table

Measuring process

- 5 warm-up cycles
- 5 measuring cycles
- 24 measuring points (15°)
- Acceleration 500°/s²
- Heidenhain ROD 800 measuring and test equipment with K15 coupling
- Unloaded rotary table as individual module – room temperature approx. 22°C

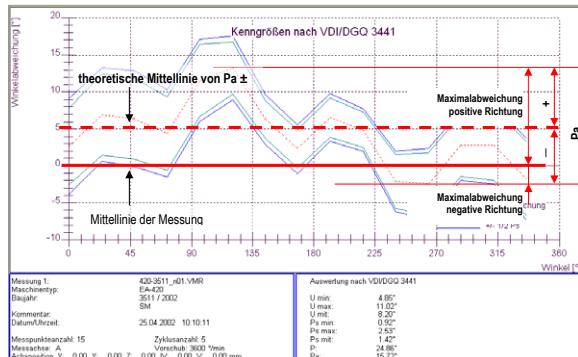

Explanation of indexing accuracy $Pa \pm$:

Indexing accuracy ($Pa \pm$) [arc sec]

...refers to the sum of maximum positive and negative deviations between the ACTUAL position and the TARGET position of all angular positions over 360° measured in a direction of rotation, stated as \pm value. This is equal to the position deviation Pa according to VDI/DGQ 3441, but accumulated (example: TG ± 15° corresponds to Pa 30°) and:

- without consideration of the reversal error
- without consideration of the radial and axial run-out error of the spindle



Repeat accuracy (Ps_{with_s}) [arc sec]

...refers to the maximum deviation within the results of the repeatedly measured angular positions, approached from the same side. This corresponds to the position variation Ps max according to VDI/DGQ 3441, i.e.:

- without consideration of the reversal error




Positioning accuracy (P) [arc sec]

...refers to the maximum deviation between the TARGET position and the ACTUAL position when the direction of rotation changes.

This corresponds to the positioning uncertainty P in accordance with VDI/DGQ, i.e.:

- without consideration of the radial and axial run-out error of the spindle.

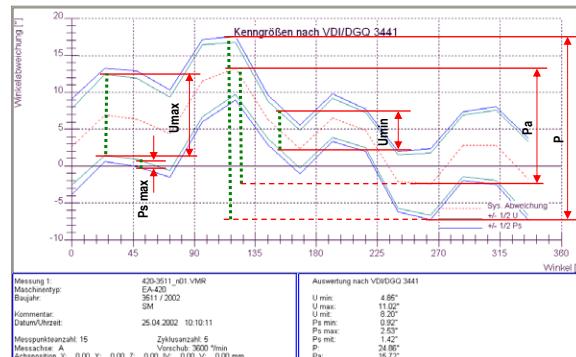

Explanation of the various parameters in accordance with VDI/DGQ 3441:

Reversal backlash (U gear) [arc sec]

...refers to the maximum mechanical backlash when the direction of rotation changes within a specific number of repeatedly measured angular positions.

- This does not correspond to a measurement parameter listed in VDI/DGQ 3441
- The elasticity of all parts connected in the drive train is NOT taken into account

Reversal error (U average*) [arc sec]

...refers to the average reversal error, including elasticity, backlash and/or overshoot of all parts connected in the drive train when the direction of rotation changes within a specific number of repeatedly measured angular positions.

This corresponds to the reversal error U average according to VDI/DGQ 3441. The average value is calculated on the basis of all measured values.

* For compensation and definition of backlash, please refer to «Geometry / Integration, 6.4»

Definition of the terms used in this catalog

4 Speed

Duty cycle (ED)

[%]

...refers to the duration of the movement per unit of time in accordance with the DIN/VDE 0530 standard. pL rotary tables are designed for intermittent duty (positioning operation) S3 at a duty cycle of 20%, but with a cycle duration of 1 minute. If these conditions are exceeded by the respective application, the drive data must be reduced accordingly.

**DIN / VDE
0530
S3, ED 20%**

Spindle speed (n_{sp})

[rpm]

...always refers to the maximum possible speed of the spindle


- while complying with the duty cycle
- with the corresponding motor
- with the pL standard spindle load (cubic)

Cycle time 90° / 180° (t_{90°} / t_{180°})

[sec]

...refers to the time required for the entire indexing operation for a 90°/180° movement

- Indexing operation STANDARD pL = unclamping and clamping monitored using a pressure sensor. During clamping, the clamped signal is sent as soon as a value of 100 bar has been reached. Thus, the machine can move even before the full clamping pressure is applied. If the full clamping pressure has not been reached after 2 sec, the clamped signal is canceled. This is all controlled by the pL-smartBox.
- Indexing operation OPTIMIZED = as standard, but the clamped signal is queried only prior to the feed movement. This operation requires adjustment of the respective machine PLC and is not included in the pL scope of delivery.



5 Spindle bearing

Axial force (F_{axial})




[N]

...refers to the maximum permissible axial load on the spindle. It includes the workpiece, devices, machining forces and other forces resulting from the rotational and tilting movement.

Tilting moment (M_{tilt})

[Nm]

...refers to the maximum permissible tilting load on the spindle, measured from the spindle face. It includes the workpiece, devices, machining forces and torques resulting from the rotational and tilting movement.



Transport load (sl_{max})


[kg]

...refers to the total, maximum permissible load which is installed starting from the spindle nose and performs a rotational movement together with the spindle (device and workpiece). This load does not correspond to the pL standard spindle load.

Radial and axial run-out (ro_{rad/ax})

[mm]

...refers to the maximum deviation occurring in the axial (axial run-out) or radial (radial run-out) direction when measured over 360°. Measured in each case on the maximum possible diameter of the spindle nose.




6 Clamping

Clamping torque (M_{clamp})

[Nm]

...refers to the maximum permissible torque load on the spindle nose during active clamping (6 bar air pressure). The pL clamping is extremely rigid. Depending on the load, there is also a settling behavior in addition to a usual elasticity. We distinguish between three phases when progressing from zero load to maximum load. The settling behavior results in an irreversible torsion after unloading as follows:

- Phase 1 «normal» (approx. 1/3 to 1/2 of the permissible clamping torque) up to approx. 0.0015 mm*
- Phase 2 «increased» (approx. 2/3 of the permissible clamping torque) up to approx. 0.005 - 0.01mm*
- Phase 3 «maximum» (up to 100% of the permissible clamping torque) up to approx. 0.035 mm*



The clamping torque is high enough that the rotary package of the 2-axis rotary tables can have significant torsional movement even before the clamping is relaxed. As a result, the maximum clamping torque cannot be used in all cases.

* For unilateral load, in relation to the spindle outside Ø of the respective rotary table. The indexing and repeat accuracy is not impaired by another positioning.

Function explanations, limit values and conditions minimize your risks

7 Leak tightness (in acc. with EN 60529)

...refers to the leak tightness in terms of protection against accidental contact, protection against the ingress of foreign matter and protection against the ingress of water:

IP 65: Protection against accidental contact, no ingress of dust, protection against the ingress of water jets

IP 66: Same protection as IP 65, but protection against the ingress of powerful water jets

IP 67 (standard at pL): Same protection as IP 66, but protection against the ingress of water from temporary immersion

IP 68 (optional at pL): Same protection as IP 67, but protection against the ingress of water from permanent immersion



8 Geometry and integration

All accuracy data apply to an unloaded rotary table

Tilting drift (sd₂₀₀)

...denotes the deviation of the perpendicularity of the rotary axis relative to the tilting axis over a certain swivel range. pL always measures 3 points: -90° (horizontal), -45° and 0° (vertical), always referred to the rotary axis position and on a radius from the tilting axis center of 200 mm.

3D precision

offset 1: [mm]
0.013

Pitch error: [°]
0.005

Offset values (offset)

...refer to the deviation from any theoretical NOMINAL values in order to ensure easier alignment of the rotary table on the machine and faster commissioning.

Pitch error (pe)

...refers to the effective NOMINAL-ACTUAL deviation over a specific rotation angle (»pitch error«) for axis error compensation on the CNC machine. For rotary tables, this occurs typically with the movement of eccentrically arranged loads such as clamping yokes, tilting axes etc.

Backlash (bl)

...refers to the mechanical and electronic reversal error* (gear unit, angular position measuring system, positioning control, etc.) for the loose backlash compensation on the CNC machine.

* For definition, see »Gear unit« p. 60

Parameter lists

To minimize commissioning time and make maximum use of the pL rotary table, you can find parameter lists for various controls at www.lehmann-rotary-tables.com. In the case of load-relevant parameters, we distinguish between...

FANUC	a2/5000is
	Fanuc
	a1000A
HEIDENHAIN	
	RON x2xF
i 90:1	
Value	Value
Catalog: 19800	
Usual: 16200	
Max. load: 5400	

usual

...refers to the practically-oriented drive values for pL standard spindle loads that should usually be set (pL recommendation). This is in order to permit certain reserves to integrate deviations occurring in practice and to allow an easier control comparison. Normally, no warm-up is required here.

catalog


...refers to the maximum achievable catalog drive values for pL standard spindle loads, for which more stringent requirements are imposed both on the commissioning engineer and on the material in order to achieve these values. Depending on the respective application, they must be reduced (empirically). A warm-up cycle for the gear unit is frequently recommended here.

max load

...refers to the maximum achievable drive values for J max. and eccentric loading.

9 Axis definition

Tilting axis
Rotary axis





Workpiece clamping

Correct selection – Select the right accessories for each rotary table:

Item No.

x0x	
Gear unit	0 or 7 = Standard, 1 or 8 = Highspeed
Size	0 = smallest type, 3 = largest type

Q = Q-Line, M = M-Line, 5 = Series 500

Reading example


The clamping cylinder SPZ.5xx-P fits in the adjacent example for size 0 and 1.

pL LEHMANN Item no.	Designation
x0x x1x	SPZ.5xx-P

Pneumatic clamping cylinders

Spindle accessories in rear

(see pp. 44 – 49)

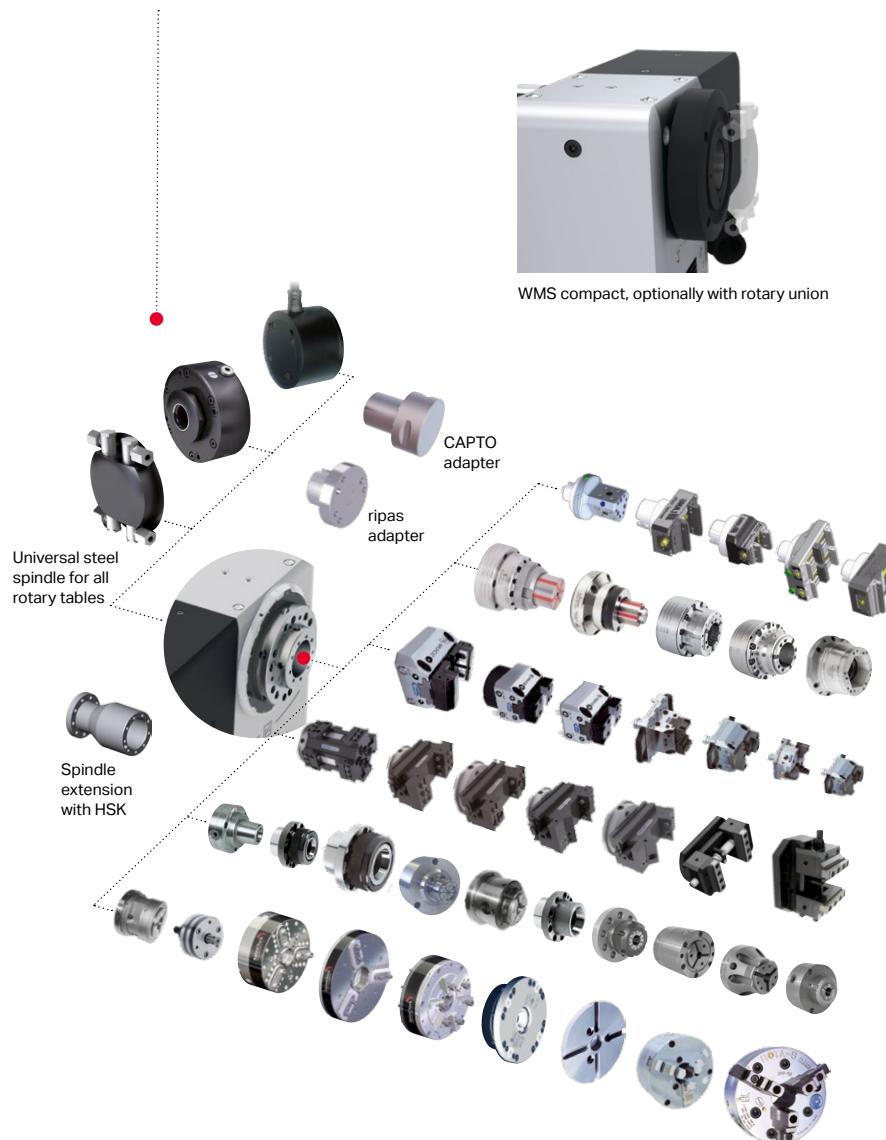

Spindle accessories in front



HSK clamping with precise angular positioning =
compact palletizing system manual and automatic



newChuck: ideal table chuck for machining of the 5th or 6th side, for example, with integrated ripas

All clamping devices installed by pL LEHMANN (if ordered together with a rotary table)

The main advantages of ripas

- Very space-saving because of complete integration into the spindle
- Easy to retrofit
- Very torsionally rigid
- High precision
- Standard interface proven in thousands of applications
- When required, standard adapter can also be used (no rough positioning possible)

The principle

The basis is the standardized HSK clamping with conventional clamping sets. However, the carrier cams are precisely ground and can deflect axially. The counterpart (HSK adapter) has a precise groove as well as a positioning bore for the guide pin.


The function

ripas has 3 functions:

- Ⓐ Anti-twist protection
- Ⓑ Rough positioning
- Ⓒ Precision positioning

Process

During changes (manual or automatic), the guide pin Ⓐ ensures proper orientation of the pallet while providing rough positioning at the same time Ⓑ. Shortly before the face is reached, the inner precision cams carry out the precision positioning Ⓒ.

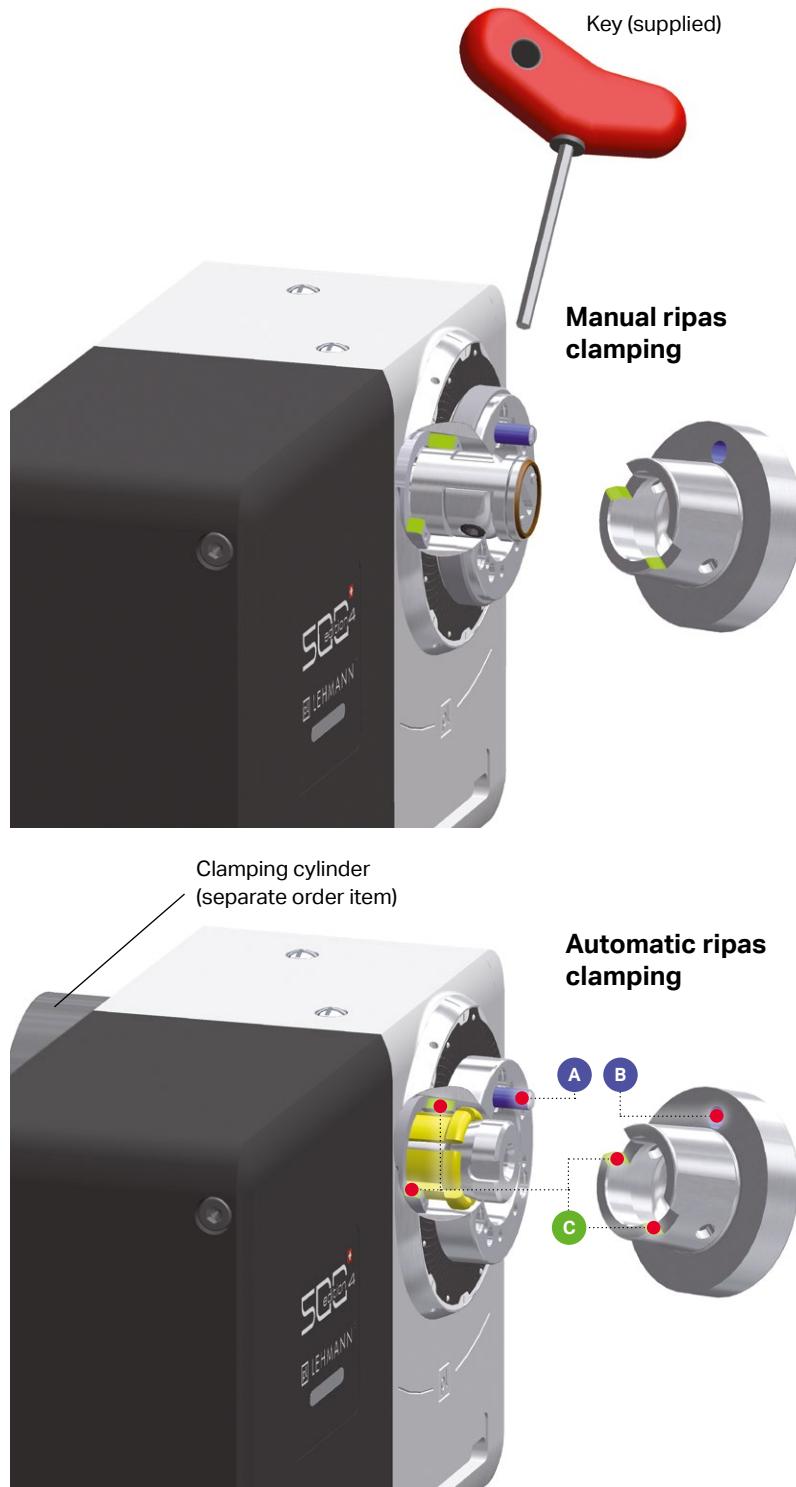

Flexible, precise, compact and automatable – the ripas palletizing system or zero-point clamping system from pL LEHMANN

SPZ.5xx = Item number for combined clamping cylinder for types 507 and 510

	Item No.	Designation	Weight [kg]	Manual (MAPAL) automatic (Ortlieb)	Required clamping cylinder *
x0x	RIP.507-63 m	ripas clamping, manual, A63	0.97	•	
	RIP.507-63m-OT	ripas clamping, manual, A63, for Ottet system		•	
	RIP.507-63k	ripas clamping, automatic, A63	1.12	•	SPZ.5xx-9 / -p
	RIP.507-63k-OT	ripas clamping, automatic, A63, for Ottet system			SPZ.5xx-9 / -p
x1x	RIP.510-63 m	ripas clamping, manual, A63	0.97	•	
	RIP.510-63m-OT	ripas clamping, manual, A63, for Ottet system		•	
	RIP.510-63k	ripas clamping, automatic, A63	1.12	•	SPZ.5xx-9 / -p
	RIP.510-63k-OT	ripas clamping, automatic, A63, for Ottet system			SPZ.5xx-9 / -p
all sizes	MKx.5xx-MK4-1	Adapter MK4	1.60		
	RIP.63ada	ripas adapter - Standard	0.70		
	RIP.63ada-B	ripas adapter with face coating for major improvement of the slip-free torque transmitted (please refer to technical data)	0.70		
	RIP.63-KD-1	ripas/HSK alignment pin	2.63		
	RIP.FUTm	ripas table chuck	23.10	•	

HSK = Hollow shank taper to DIN 69063-1 (spindle) or DIN 69893 (adapters)

* For T-type rotary tables it may be necessary to increase the center height, see **p. 45**

Technical data for ripas / HSK

	Unit	HSK-A63 manual		HSK-A63 automatic	
		Standard	ripasGrip (option)	Standard	ripasGrip (option)
Perm. tensile force, max.	kN	–	–	10 for hyd. 50 / pneu. 9 bar ¹⁾	30
Resulting insertion force on adapter, max.	kN	30 at 20 Nm ²⁾	–	–	approx. 600
Perm. tilting moment (before losing face contact)	kN	approx. 600	–	approx. 600	approx. 60
Transport load	kg	approx. 60	–	approx. 60	approx. 60
Perm. torque ³⁾ (slip ⁴⁾ max. $\pm 0.003^\circ$ A	Nm	–	ca. +50%	approx. 150	approx. 300
Perm. torque ³⁾ (slip ⁴⁾ max. $\pm 0.01^\circ$ B	Nm	–	ca. +50%	approx. 250	approx. 450
Repeat accuracy XYZ	mm	< 0.005	–	< 0.005	–
Repeat accuracy, angular	\pm arc sec	8	–	4	–

¹⁾ With SPZ.5xx-9 / -p

²⁾ Radial screw

³⁾ Values apply under static conditions, without any vibrations, with no load, dry, grease-free, clean

⁴⁾ Returns to original position after unclamping/clamping

Options for all sizes

SPZ.Awk-Vor	Preparation for presence check only possible for automatic clamping (only with adapter from pL)
SPZ.Awk	Control box for presence check (see p. 44)

CAPTO clamping

	Item No.	Designation	Weight [kg]	Manual	Automatic	Required clamping cylinder *
x0x	CAP.507-C3k	Capto clamping, C3			•	SPZ.5xx-9 / -p
	CAP.507-C4m	Capto clamping, C4		•		
	CAP.507-C4k	Capto clamping, C4			•	SPZ.5xx-9 / -p
x1x	CAP.510-C4m	Capto clamping, C4		•		
	CAP.510-C4k	Capto clamping, C4			•	SPZ.5xx-9 / -p

* For T-type rotary tables it may be necessary to increase the center height, see **p. 45**



Zero point clamping combined with additive manufacturing



QUATTRO chuck

Connection for contact check/cleaning

Manual tension: 180° rotation is enough

Compressed air connection for clamping

Dimensions:
150 x 150 x 35 (53) mm
(L x W x H)

Compressed air connection for unclamping

17 mm

35 mm

6 screws (M10) for fastening to the machine table,
Grid 100 or 50 mm

UNO chuck



Dimensions:
100 x 100 mm
35 mm tall

6 benefits (applies to QUATTRO and UNO)

- Only 35 mm high
- Manual and pneumatic in one
- Easy to clean
- With pulse voltage
- Easy mounting
- Minimal maintenance

Technical data


		UNO	QUATTRO
Repeat accuracy X/Y/Z		approx. ± 0.005 mm	
Retention force, clamped	Manual pneumatic at 6 bar	approx. 6 kN approx. 10 kN	approx. 24 kN approx. 40 kN

Item No.

Item No.	Designation	Dimensions	Weight [kg]	Max. speed [rpm]
AML.SPF-U	UNO chuck	Ø50x34 mm, 1 pin	1.18	
AML.SPF-Q	QUATTRO chuck	150x150x34 mm, 4 pins	4.70	



Further information: www.maprox.ch
Request installation and operating instructions directly from manufacturer



Exact alignment possible thanks to alignment play (approx. 0.1 mm).

Scroll chucks Maprox ZAS (manual)

incl. appropriate adapter flange, 1 set each of hard boring and turning jaws as well as clamping wrench and fastening screw

	Item No.	Designation	D [mm]	d [mm]	L [mm]	Weight [kg]	max. n [min ⁻¹]	Moment of inertia J [kgm ²]	Clamping Ø inside [mm]	Clamping Ø outside [mm]
x0x	BFU.507-110ps light ¹⁾	Scroll chuck, aluminum	110	32	36	1.4	3,000	0.002	22-96	3-106
	BFU.507-125ps light ²⁾		125	36	26	1.4		0.003	32-410	3-140
	BFU.507-160ps light ^{1,2)}		160	46	35	2.9		0.01	40-196	3-196
x1x	BFU.510-125ps light	Scroll chuck, aluminum	125	36	26	1.4	3,000	0.003	32-410	3-140
	BFU.510-160ps light ^{1,2)}		160	46	35	2.9		0.01	40-196	3-196
	BFU.510-240ps light ^{1,2)}		240	68	53	9.5		0.02	38-292	4-292

Not possible in combination with spindle seal with labyrinth SPI.507-Lab

¹⁾ Delivery time at least 3 months

²⁾ Not possible for TxPc models



Maprox chuck 3 ZAS with steel step jaws:

- Reversible
- Ground
- Case hardened (corrosion protected)

Maprox E-Chuck (automatic)

	Item No.	Designation	D [mm]	d [mm]	L [mm]	Weight [kg]	max. n [rpm]	Clamping Ø [mm]	Moment of inertia J [kgm ²]
x0x	BFU.507-100e	intelligent, electric chuck	100 (155)	0	86	4	2-78	< 0.01	
x1x	BFU.510-100e								

Additional technical data

- Concentricity: 0.1mm
- Max. part weight: 1.6kg
- Max. clamping force 0.5Nm
- Special jaws possible on request



Maprox E-Chuck

- LED status ring (RGB)
- Clamp the finest parts precisely and safely
- Control via WLAN and Bluetooth

Maprox Dual-Fix (manual)

Dual-Fix with manual actuation as well as pneumatic actuation possible



Benefits

- Fast and reliable clamping of the component
- Good accessibility of the measuring probe

Technical data

- Scope of delivery without jaws
- Clamping capacities with standard jaws: inside: 2-27 mm, outside: 0-30 mm
- For internal and external clamping
- Body corrosion-protected

Dimensions


- Jaw travel: 10mm
- Housing diameter: 55mm

Options

- Jaws possible for all diameters
- Stops for component-specific positioning
- Pneumatic or manual actuation
- Rotary union for pneumatic actuation

Please contact us for more information.

Maprox collet chuck holder SHG / SH

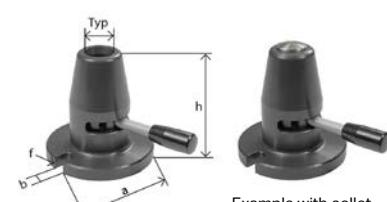


Example with collet

Type	Collet	h [mm]	a [mm]	f-Ø [mm]	Clamping Ø [mm]
8	B8, 302E	60	65	55 / M8	0.3-10
10	W10, 314E	60	65	55 / M8	0.3-10
12	W12, 318E	70	70	60 / M8	0.3-12.5
20	W20, 349E	100	100	85 / M10	0.3-23
25	W25, 364E	125	100	85 / M10	0.3-29
32	B32, 3713E	125	115	97 / M10	0.3-32



Clamping devices installed and aligned by pL LEHMANN (if ordered together with a rotary table)

Further information at: www.niederhauser.ch
 Request installation and operating instructions directly from manufacturer



Exact alignment possible
thanks to alignment play
(approx. 0.1 mm).

Precision power chucks, 2- jaw (cylinder-actuated)

			D [mm]	Passage [mm]	L from spindle [mm]	Weight [kg]	Max. speed [rpm]	Moment of inertia [kg ²]	Required clamping cylinder	Niederhauser item no., incl. adapter flange
	x0x	BFU.507-100ksa-2	2-CL-C 100 Z92	100	–	68	5	6,000	SPZ.5xx-15 / -p	507-CLC100
		BFU.507-125ksa-2	2-CL-C 125 Z115	125	–	90	8	5,000	SPZ.5xx-15 / -p	507-CLC125
		BFU.507-160ksa-2	2-CL-C 160 Z140	160	–	105	14	4,100	SPZ.5xx-15 / -p	507-CLC160
	x1x	BFU.510-125ksa-2	2-CL-C 125 Z115	125	–	92	8	5,000	SPZ.5xx-15 / -p	510-CLC125
		BFU.510-160ksa-2	2-CL-C 160 Z140	160	–	107	14	4,100	SPZ.5xx-15 / -p	510-CLC160
		BFU.510-200ksa-2	2-CL-D 200 Z170	200	–	118	20	3,300	SPZ.5xx-15 / -p	510-CLD200

- Can be used as centric clamping unit (if clamping cylinder is present)
- Up to size 160 with tongue and groove base jaws



Precision power chucks, 3- jaw (cylinder-actuated)


			D [mm]	Passage [mm]	L from spindle [mm]	Weight [kg]	Max. speed [rpm]	Moment of inertia [kg ²]	Required clamping cylinder	Niederhauser item no., incl. adapter flange
	x0x	BFU.507-130ksa	BHD-130-32-3-Z	130	32	85	7	7,000	SPZ.5xx-15 / -p	507-BHD130
		BFU.507-165ksa	BHD-165-46-3-Z	165	46	95	13	6,000	SPZ.5xx-15 / -p	507-BHD165
	x1x	BFU.510-165ksa	BHD-165-46-3-Z	165	46	97	13	6,000	SPZ.5xx-15 / -p	510-BHD165
		BFU.510-210ksa	BHD-210-52-3-Z	210	52	112	24	5,000	SPZ.5xx-15 / -p	510-BHD210

- Radial run-out approx. 0.02 mm
- Repeatability approx. 0.02 mm
- Fine serration on base jaws
- BHD version is with inch jaws



Clamping devices installed and aligned by pL LEHMANN (if ordered together with a rotary table)

Further information at: www.niederhauser.ch
 Request installation and operating instructions directly from manufacturer




Exact alignment possible
thanks to alignment play
(approx. 0.1 mm).

Front-end power chuck, 3-jaw


pL LEHMANN Item No.	Designation	D [mm]	Passage [mm]	L from spindle [mm]	Weight [kg]	Max. speed [rpm]	Moment of inertia [kg ²]	Niederhauser item no., incl. adapter flange
x0x	BFU.507-125vsa	SP 125-26	204	26	135	21	4,000	507-SP125
x1x	BFU.510-160vsa	SP 160-38	255	38	163	33	3,500	510-SP160




- With finely serrated base jaws



Clamp/open (only possible at standstill). Profile seal is applied to the chuck outer diameter by compressed air and the cylinder chamber is filled. After the clamping pressure has been built up, the compressed air is switched off and the respective cylinder chamber is closed by a pilot-operated check valve in the chuck.




SMW profile seal has lifted off due to inherent elasticity. Clamping pressure is maintained constantly in the cylinder and chuck can rotate.




Distributor mounted on chuck outer diameter with centering ring (wear part). An anti-rotation device is required on the machine headstock.

Manual flange-mounted chuck supplied loose,
power-operated, set up and aligned by pL LEHMANN
(if ordered together with a rotary table)



Mounting chuck, manual
Radial run-out with collet approx. 15µ (Schaublin)

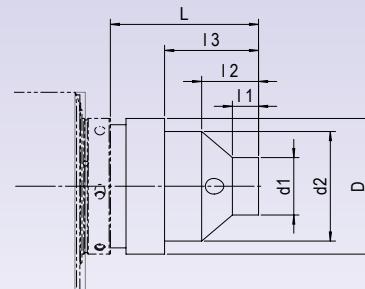

Mounting chuck, automatic Type B axfix

Further information at: www.niederhauser.ch

Request installation and operating instructions directly from manufacturer

SPZ.5xx = Item number for combined clamping cylinder for types 507 and 510 (see p. 44)


pL LEHMANN Item No.	Designation	System axfix	Manual	Power- actuated	L [mm]	I 1 [mm]	I 2 [mm]	I 3 [mm]	D [mm]	d1 [mm]	d2 [mm]	d3 [mm]	Weight [kg]	Max. speed [1pm]	Required clamp- ing cylinder ** (Option)	Niederhauser item no., incl. adapter flange
ZSP.507-B32Am	Mounting chuck	B32	●		133	59	75	—	126	53	62	88	8.5	6,000		507-B32
ZSP.507-B32Aka	Mounting chuck	B32	●	●					130				7.2	8,000	SPZ.5xx-d2.5d25	507-B32KA
ZSP.510-B32Am	Mounting chuck	B32	●		133	59	75	—	126	53	62	88	8.7	6,000		510-B32
ZSP.510-B32Aka	Mounting chuck	B32	●	●					130				7.2	8,000	SPZ.5xx-d2.5d25	510-B32KA

** For T-type rotary tables it may be necessary to increase the center height, see p. 45

Clamping capacity and passage

System	Clamping capacity [mm]	Collet passage [mm]
B32	0.3 to 32	28

Mounting chuck




Collet holder B32




For more, please see p. 73


Principle of collet clamping with HSK application

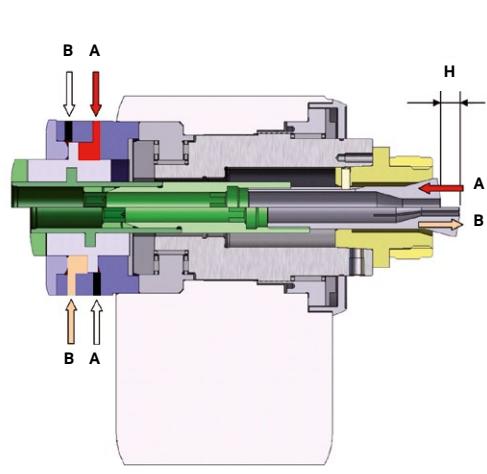

Automatic collet clamping

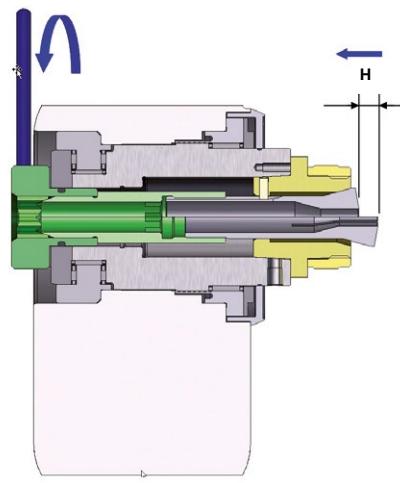


Manual collet clamping



Manual flange-mounted chuck supplied loose, power-operated, set up and aligned by pL LEHMANN (if ordered together with a rotary table)

Mounting chuck, manual

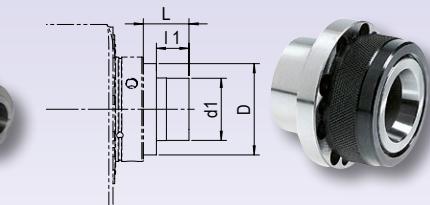

Collet adapter, installed by pL LEHMANN (if ordered together with a rotary table)

Further information at: www.niederhauser.ch

Request installation and operating instructions directly from manufacturer

SPZ.5xx = Item number for combined clamping cylinder for types 507 and 510 (see p. 44)

pL LEHMANN Item No.	Designation	System	Manual Power actuated	L [mm]	L1 [mm]	L2 [mm]	D [mm]	d1 [mm] *without/with threaded protective ring	d2 [mm]			Weight [kg]	Max. speed [rpm]	Required clamping cylinder ** (Option)	Niederhauser item no., incl. adapter flange
									d3 [mm]						
x0x	ZSP.507-W20m	with HSK adapter	W20	●	50	35	—	70	38/54*	—	—	507-W20	507-W20	SPZ.5xx-d2.5 / -p	SPZ.5xx-d2.5 / -p
	ZSP.507-W20Am	Mounting chuck	W20	●	111	36	53	126	40	54	88	7.5	6,000		
	ZSP.507-W20k	with HSK adapter	W20	●	50	35	—	70	38/54*	—	—				
	ZSP.507-W25m	with HSK adapter	W25	●	50	35	—	70	48/60*	—	—				
	ZSP.507-W25Am	Mounting chuck	W25	●	135	60	76	126	48	59	88	8.5	6,000		
	ZSP.507-W25k	with HSK adapter	W25	●	50	35	—	70	48/60*	—	—				
	ZSP.507-W31m	with HSK adapter	W31.75	●	50	35	—	70	46	—	—				
	ZSP.507-W31Am	Mounting chuck	W31.75	●	122	48	64	126	53	62	88	7.5	6,000		
x1x	ZSP.507-W31k	with HSK adapter	W31.75	●	50	35	—	70	46	—	—	507-W31.75	SPZ.5xx-d2.5 / -p	SPZ.5xx-d2.5 / -p	SPZ.5xx-d2.5 / -p
	ZSP.507-W31kND	with HSK adapter, effective passage increased ø25mm	W31.75	●	50	35	—	70	46	—	—				
	ZSP.510-W20m	with HSK adapter	W20	●	50	35	—	70	38/54*	—	—				
	ZSP.510-W20Am	Mounting chuck	W20	●	111	36	53	126	40	54	88	7.5	6,000		
	ZSP.510-W20k	with HSK adapter	W20	●	50	35	—	70	38/54*	—	—				
	ZSP.510-W25m	with HSK adapter	W25	●	50	35	—	70	48/60*	—	—				
	ZSP.510-W25Am	Mounting chuck	W25	●	135	60	76	126	48	59	88	8.5	6,000		
	ZSP.510-W25k	with HSK adapter	W25	●	50	35	—	70	48/60*	—	—				
x1x	ZSP.510-W31m	with HSK adapter	W31.75	●	50	35	—	70	46	—	—	510-W31.75	SPZ.5xx-d2.5 / -p	SPZ.5xx-d2.5 / -p	SPZ.5xx-d2.5 / -p
	ZSP.510-W31Am	Mounting chuck	W31.75	●	122	48	64	126	53	62	88	7.5	6,000		
	ZSP.510-W31k	with HSK adapter	W31.75	●	50	35	—	70	46	—	—				
	ZSP.510-W31kND	with HSK adapter, effective passage increased ø25mm	W31.75	●	50	35	—	70	46	—	—				

** For T-type rotary tables it may be necessary to increase the center height, see p. 45

Collet adapters (Type W) LEHMANN®



W20



W25



W31.75 (5C)

Collet holder W25



with standard W25 collet



For further information, please visit: www.ki-mech.ch
Request installation and operating instructions directly from manufacturer


- Rugged and slim design for better accessibility
- Radial run-out < 0.005 mm

Clamping capacity and (effective) passage

System	Clamping capacity [mm]	Collet passage [mm]	Standard effective passage [mm]
W20	0.3 to 23	14.5	14
W25	0.3 to 29	21	17
W31.75 (5C)	0.5 to 31	27	17
W31.75 (5C), increased passage*	0.5 to 31	27	25

* applies to kND versions in table above


for sizes 507 to 530



Manual flange-mounted chuck supplied loose, power-operated, set up and aligned by pL LEHMANN (if ordered together with a rotary table)

Mounting chuck, manual Type F

for sizes 507 to 530



Mounting chuck, hydraulic Type F

Further information at: www.niederhauser.ch

Request installation and operating instructions directly from manufacturer

Collet clamping Type F

Achievable accuracy with collet 30–40µ

pL LEHMANN Item No.	Designation	Manual	Pneumatic	Hydraulic	System	Clamping capacity [mm]	L [mm]	I 1 [mm]	D [mm]	d 1 [mm]	Weight [kg]	Max. speed [rpm]	Required clamping cylinder *	Niederhauser item no., incl. adapter flange
ZSP.507-F35Am	Mounting chuck	●		F35	1 to 30	129	40	160	90	12.7	4,500			507-F35
ZSP.507-F35Ak	Mount. chuck, power-actuated		●	F35	1 to 30	117.4	73.4	112	85	8.8	6,000	SPZ.5xx-9 / -p		507-F35K
ZSP.510-F35Am	Mounting chuck	●		F35	1 to 30	129	40	160	90	12.7	4,500			510-F35
ZSP.510-F35Ak	Mount. chuck, power-actuated		●	F35	1 to 30	114.4	73.4	112	85	8.8	6,000	SPZ.5xx-9 / -p		510-F35K

SPZ.5xx = Item number for combined clamping cylinder for types 507 and 510 (see p. 44)

* For T-type rotary tables it may be necessary to increase the center height, see p. 45



Manual



Automatic


Collet clamping Type ER

pL LEHMANN Item No.	Designation	Manual	System	Clamping capacity [mm]	L [mm]	I 1 [mm]	I 2 [mm]	D [mm]	d 1 [mm]	d 2 [mm]	Weight [kg]	Max. speed [rpm]	Niederhauser item no., incl. adapter flange
ZSP.507-E25Am	Mounting chuck	●	ER-25	0.5 to 17	62	30	–	90	42	–	2.7	6,000	507-ER25
ZSP.507-E32Am	Mounting chuck	●	ER-32	1 to 22	70	38	–	90	50	–	3.0	6,000	507-ER32
ZSP.507-E40Am	Mounting chuck	●	ER-40	2 to 30	72	40	–	90	63	–	3.7	6,000	507-ER40
ZSP.510-E25Am	Mounting chuck	●	ER-25	0.5 to 17	46	30	–	90	42	–	1.5	6,000	510-ER25
ZSP.510-E32Am	Mounting chuck	●	ER-32	1 to 22	54	38	–	90	50	–	1.8	6,000	510-ER32
ZSP.510-E40Am	Mounting chuck	●	ER-40	2 to 30	56	40	–	90	63	–	2.5	6,000	510-ER40



Manual


for sizes 507 and 510



Mounting chuck, manual Type ER

Clamping devices installed and aligned by pL LEHMANN
(if ordered together with a rotary table)

Further information at: www.niederhauser.ch
Request installation and operating instructions directly from manufacturer

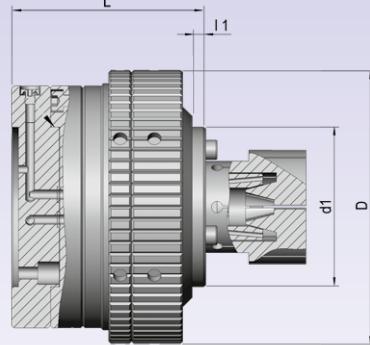

OTTET collet chuck

pL LEHMANN Item No.	Designation	D [mm]	d 1 [mm]	L [mm]	l 1 [mm]	Weight [kg]	Max. speed [rpm]	Power-actuated	Required rotary union or clamping cylinder*	Niederhauser item no., incl. adapter flange
x0x	ZSP.507-OTp ZSP.507-OTph** ZSP.507-OTkh**	OTTET collet chuck	130	—	85	—	12.7	7,000	●	DDF.507-04 507-FNO-1
			120	70	82	—	9.2	7,000	●	DDF.507-04 507-FNO-PH
			120	70	96	20	9.2	7,000	●	SPZ.5xx-9 / -p 507-FNO-K
x1x	ZSP.510-OTp ZSP.510-OTph** ZSP.510-OTkh**	OTTET collet chuck	130	—	85	—	12.7	7,000	●	DDF.510-04 510-FNO-1
			120	70	85	—	9.2	7,000	●	DDF.510-04 510-FNO-PH
			120	70	99	20	9.2	7,000	●	SPZ.5xx-9 / -p 510-FNO-K

* see pp. 44-47

** h = with stroke limitation

The collet chuck with clamping piston inside is suitable for internal and external clamping, pneumatically actuated.







OTTET collet clamping with ripas

 LEHMANN®

pL LEHMANN Item No.	Designation	Max. speed [rpm]	Required ripas palletizing system and clamping cylinder*
x0x	ZSP.507-OTk ZSP.507-OTm	With HSK adapter, power-actuated With HSK adapter, manual	RIP.507-63m-OT and SPZ.5xx-2.5 / -p required RIP.507-63k-OT and SPZ.5xx-2.5 / -p required
x1x	ZSP.510-OTk ZSP.510-OTm	With HSK adapter, power-actuated With HSK adapter, manual	RIP.510-63m-OT and SPZ.5xx-2.5 / -p required RIP.510-63k-OT and SPZ.5xx-2.5 / -p required

* see p. 44/47/67

The collet chuck with clamping piston inside is suitable for internal and external clamping, pneumatically actuated.

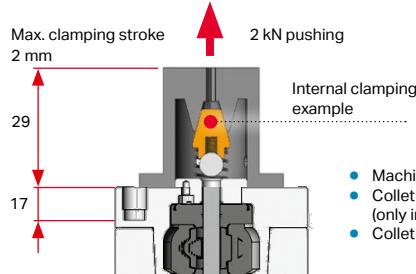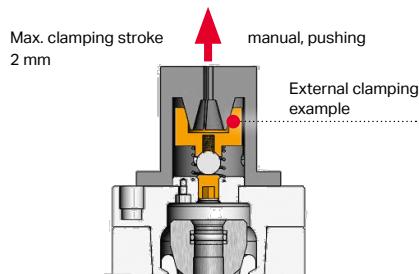

ripas automatic (or manual), OTTET manual

- Machining depth 8-13 mm
- Collet min. Ø30 (only internal clamping possible)
- Collet max. Ø80 mm

ripas manual (automatic not possible), OTTET automatic



Clamping devices installed and aligned by pL LEHMANN
(if ordered together with a rotary table)

Further information: www.hainbuch.com
Request installation and operating instructions directly from manufacturer

The clamping device serves as the starting point on the Lehmann CNC rotary table and can be set up easily for your workpieces through use of a wide variety of clamping elements and adapters. The HAINBUCH System offers a multitude of clamping options – without major expense or effort for setup. It doesn't matter whether the clamping requires a round or profiled contour or whether unmachined or finish-machined parts, soft or hard machining, or external or internal clamping are involved.


Advantages of Axzug

- More accurate
- More stable
- Cheaper
- Smaller

Advantages of Axfix

- Fewer clamping marks
- No loss of clamping length
- Defined axial positioning (e.g., for work with counter spindle)
- Hainbuch system not possible

Rotating clamping device

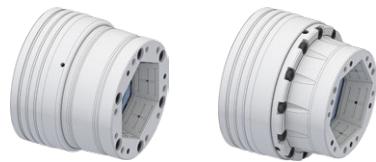

TOPlus Chuck
TOPlus mini Chuck



SPANNTOP Chuck
SPANNTOP mini Chuck



TOROK manual chuck (only Axzug available)

Stationary clamping devices



MANOK plus manual vise



HYDROK hydraulic vise

Clamping element




Clamping head – external clamping

Clamping adapters



MANDO Adapt mandrel – internal clamping



Jaw module size 145 or 215 – jaw clamping (2 jaws also available)



Face driver adaptation
Morse taper adapter



Magnet module

All-round clamping

- 3 different versions: for raw material, fine machining or boring on your own
- Multitude of profile clamping options
- Coolant-resistant rubber-metal connection, keeps swarf out of the clamping devices
- Clamping capacity SE \varnothing 3 – 65 mm
Clamping capacity RD \varnothing 3 – 65 mm

- Fast conversion from external to internal clamping without alignment thanks to CENTREX interface
- Radial run-out < 0.005 mm between chuck taper and mandrel taper
- Clamping capacity \varnothing 8 – 100 mm


- axfixe 3-jaw clamping
- Can be used in rotating (moving) and stationary applications
- Convert from chuck head to mandrel or jaw clamping in less than 2 minutes
- Jaw stroke with size 65: 2.2 mm

- Enormous flexibility
- Self-centering of adapter in the chuck ≤ 0.003 mm
- Extremely fast conversion without disassembling the chuck S [1 min.]


- End face axial clamping via neodymium magnet
- High axial run-out changeover accuracy
- High retention force of 140 N/cm²
- Assembly in 30 sec. without aligning
- Low maintenance, since resistant to contamination
- 1 size \varnothing 200 available




Clamping devices installed and aligned by pL LEHMANN (if ordered together with a rotary table)



TOPlus mini Axzug
SPANNTOP mini Axzug



TOPlus mini Axfix
SPANNTOP mini Axfix



TOROK SE Axzug
TOROK RD Axzug

Further information: www.hainbuch.com

Request installation and operating instructions directly from manufacturer

HAINBUCH chucks TOPlus mini | TOROK SE

* For T-type rotary tables it may be necessary to increase the center height, see p. 45

pL LEHMANN Item No.	Designation	Manual	Hydraulic	Size	Clamping capacity [mm]	L [mm]	I 1 [mm]	D [mm]	d 1 [mm]	Weight [kg]	Max. speed [rpm]	Required clamping cylinder *	HAINBUCH SYSTEM compatible	HAINBUCH item no., incl. adapter flange
x0x	HAI.507-tp-axz	TOPlus mini Axzug	•	26	3 to 26	84.5	31	67 f7	129	5.3	10000	SPZ.5xx-9 / -p		10001281
x0x	HAI.507-tp-axf	TOPlus mini Axfix	•	26	3 to 26	86	33	74 f7	129	5.8	10000	SPZ.5xx-9 / -p		10001285
x1x	HAI.510-tp-axz	TOPlus mini Axzug	•	52	3 to 52	103.5	42	119 f7	150	10.9	7000	SPZ.5xx-9 / -p	•	10001282
x1x	HAI.510-tp-axf	TOPlus mini Axfix	•	52	3 to 52	104.5	44	119 f7	150	10.6	7000	SPZ.5xx-9 / -p	•	10001286
x1x	HAI.510-tp-to	TOROK SE Axzug	•	52	3 to 52	137	92	125 f7	174	14.6	7000		•	10001300

TOPlus mini

- 25% higher retention force than SPANNTOP
- Outstanding rigidity thanks to large contact surface of the clamping segments
- Insensitive to dirt thanks to clamping head geometry
- Lower centrifugal force losses compared to jaw chucks
- Optimal lubrication thanks to lubrication grooves in the clamping element holder
- Workpiece stabilized through axial pulling against workpiece stop
- Radial run-out < 0.01 mm
- Minimal interference contour and easy changing of the clamping heads



TOPlus mini

HAINBUCH chucks SPANNTOP mini | TOROK RD

* For T-type rotary tables it may be necessary to increase the center height, see p. 45

pL LEHMANN Item No.	Designation	Manual	Hydraulic	Size	Clamping capacity [mm]	L [mm]	I 1 [mm]	D [mm]	d 1 [mm]	Weight [kg]	Max. speed [rpm]	Required clamping cylinder *	HAINBUCH SYSTEM compatible	HAINBUCH item no., incl. adapter flange
x0x	HAI.507-st-axz	SPANNTOP mini Axzug	•	32	3 to 32	101	43	66 f7	133	6.7	8000	SPZ.5xx-9 / -p		10001289
x0x	HAI.507-st-axf	SPANNTOP mini Axfix	•	32	3 to 32	96	44	74 f7	129	6.2	8000	SPZ.5xx-9 / -p		10001293
x1x	HAI.510-st-axz	SPANNTOP mini Axzug	•	52	3 to 52	103.5	45	90 f7	150	9.0	7000	SPZ.5xx-9 / -p	•	10001290
x1x	HAI.510-st-axf	SPANNTOP mini Axfix	•	52	3 to 52	104.5	44	98 f7	150	9.2	7000	SPZ.5xx-9 / -p	•	10001294
x1x	HAI.510-st-to	TOROK RD Axzug	•	52	3 to 52	137	92	125 f7	174	14.7	7000		•	10001297




SPANNTOP mini

Adapter flange required in order to use Hainbuch system.


SPANNTOP mini

- Classic benefits of all HAINBUCH power chucks, e.g. high retention force, all-around clamping with high accuracy and exceptional ease of setup
- Lower centrifugal force losses compared to jaw chucks
- Workpiece stabilized through axial pulling against workpiece stop
- Radial run-out < 0.01 mm
- Minimal interference contour and easy changing of the clamping heads

Clamping devices installed and aligned by pL LEHMANN
 (if ordered together with a rotary table)

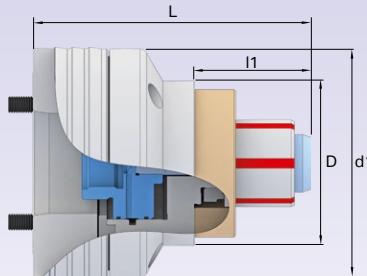

MANDO T211 Axzug

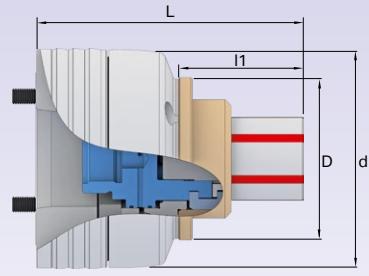MANDO T212 Axzug
MANDO T812 Axfix

Further information: www.hainbuch.com

Request installation and operating instructions directly from manufacturer

HAINBUCH MANDO clamping mandrels

* For T-type rotary tables it may be necessary to increase the center height, see p. 45

pL LEHMANN Item No.	Designation	Hydraulic	Size	Clamping capacity [mm]	L [mm]	l 1 [mm]	D [mm]	d 1 [mm]	Weight [kg]	Max. speed [rpm]	Required clamp- ing cylinder *	HAINBUCH item no., incl. adapter flange
x0x	HAI.507-ma-axz1 MANDO T212 Axzug	•	xxs	8 to 13	121.5	45.5	65	141	8.30	7000	SPZ.5xx-9 / -p	10001308
	HAI.507-ma-axf1 MANDO T812 Axfix	•	xxs	8 to 13	116.75	44.0	65	141	8.20	7000	SPZ.5xx-9 / -p	10001316
x1x	HAI.507-ma-axz2 MANDO T212 Axzug	•	xs	13 to 19	116	45.5	65	141	8.00	7000	SPZ.5xx-9 / -p	10001309
	HAI.507-ma-axf2 MANDO T812 Axfix	•	xs	13 to 19	120	47.5	65	141	8.20	7000	SPZ.5xx-9 / -p	10001317
x1x	HAI.510-ma-axz1 MANDO T212 Axzug	•	s	16 to 21	112.5	47.5	70	141	7.50	7000	SPZ.5xx-9 / -p	10001310
	HAI.510-ma-axf1 MANDO T812 Axfix	•	s	16 to 21	117.5	49.5	70	141	7.80	7000	SPZ.5xx-9 / -p	10001318
x1x	HAI.510-ma-axz2 MANDO T211 Axzug	•	0	20 to 28	115.5	40.0	75	141	7.20	7000	SPZ.5xx-9 / -p	10001303
	HAI.510-ma-axz3 MANDO T212 Axzug	•	0	20 to 28	123.5	58.5	90	141	8.00	7000	SPZ.5xx-9 / -p	10001311
x1x	HAI.510-ma-axf2 MANDO T812 Axfix	•	0	20 to 28	129.5	60.5	90	141	8.40	7000	SPZ.5xx-9 / -p	10001319



MANDO T211


For components with Ø20–
200 mm through holes
(due to tension bolts)

MANDO

- Typical HAINBUCH features such as ease of setup, parallel clamping, optimal force transmission, high rigidity and retention force as well as low wear
- Workpiece stabilized through axial pulling against workpiece stop
- Concentricity < 0.01 mm, version T812 < 0.025 mm (with +0.003 mm adaptation)
- Large adaptation range through use of vulcanized clamping elements
- Prepared for air system check at workpiece stop

MANDO T212
MANDO T812

For components with blind
holes from Ø8–200 mm



TOROK SE size 52 on T1-507510 TOP1




MANDO T211 size 0 on T1-510520 TAP2



Clamping devices installed and aligned by pL LEHMANN
(if ordered together with a rotary table)

Further information: www.hainbuch.com
Request installation and operating instructions directly from manufacturer



Tolerances apply to all HAINBUCH
clamping devices


SAFE and AirLine zero point clamping systems

	pL LEHMANN Item No.	Designation	Manual	open, pneumatic 6 bar	D1 [mm]	D2 [mm]	L from spindle [mm]	Weight [kg]	Max. speed [rpm]	Draw-in force [kN]	Retention force [kN]	Required rotary union*	HAINBUCH item no., incl. adapter flange
x0x	HAI.507-al	AirLine	•	open, hydraulic 65 bar	120	130	52			>9	40	DDF.507-04	
x1x	HAI.507-SAh	SAFE20	•	•	120	130	50			>9	40	DDF.507-04	
	HAI.507-SAm	SAFE20	•		120	130	50			>9	40		
	HAI.510-al	AirLine	•		120	130	52			>9	40	DDF.510-04	
	HAI.510-SAh	SAFE20	•		120	130	50			>9	40	DDF.510-04	
	HAI.510-SAm	SAFE20	•		120	130	50			>9	40		

* see pp. 46/47

Clamping devices for SAFE and AirLine zero point clamping systems

	pL LEHMANN Item No.	Designation	Interference circle Ø [mm]	L from support [mm]	Clamping capacity [mm]	Dimensions LxWxH [mm]	Weight [kg]	Max. speed [rpm]	HAINBUCH item no.
Center clamp	HAI.al-76	AirLine vb centro76	175	75	5-74/44-120	Ø148x90x75			
	HAI.al-76P	AirLine vb centro76 pendulum	175	75	22-74/62-120	Ø148x90x75			
	HAI.sa-76	SAFE20 vb centro76	175	75	5-74/44-120	Ø148x90x75			
	HAI.sa-76P	SAFE20 vb centro76 pendulum	175	75	22-74/62-120	Ø148x90x75			
Empty pallets	HAI.al-PalQ	AirLine Index pallet	206	35		150x150x35			
	HAI.al-PalR	AirLine Index pallet, round	160	35		Ø160x35			
	HAI.sa-PalQ	SAFE20 Index pallet	206	35		150x150x35			
	HAI.sa-PalQ	SAFE20 Index pallet, round	160	35		Ø160x35			



AirLine



SAFE

Overview &
Applications

System,
Facts & Service

Q-Line & M-Line
Tables

SPZ, DDF, RST
GLA, WMS, MOT, KAB

Tolerances &
Glossary

Tooling



Further information: www.schunk.com
Request installation and operating instructions directly from manufacturer

Hole grid plate installed by pL LEHMANN
(if ordered together with a rotary table)



KSC mini
1-sided, 1-row



KSC mini
1-sided, 2-row



KSC mini
2-sided, 1-row

Hole grid plates

		SCHUNK Item no. Hole grid plate
pL LEHMANN Item No.	L [mm]	
x1x	SCH.510-LRP500	500 1505511
	SCH.510-LRP600	600 1505512



Clamping elements


pL LEHMANN Item No.	Clamping system	SCHUNK Item no. Clamping elements
SCH.KSCmini	KSC mini	1505515
SCH.KSC80	KSC 80	1505516
SCH.KSC125	KSC 125	1505518
SCH.KSM400	KSM 400	1505521
SCH.KSM500	KSM2 500	1505522



Ordering information

Always order together with pL

- Counterbearing GLA.TOP2-xx0 (**p. 42**)
- Mounting kit RFX.5x0-ASA-TOP (**upon request**)
- Base plate RFX.5x0-GPxxx-TOP (**upon request**) or hydraulic kit GLA.HYD-xxx (**upon request**)

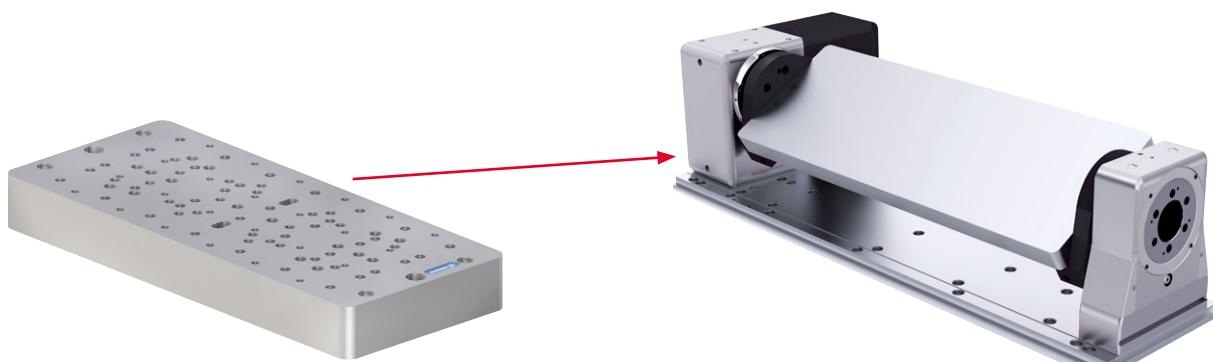

Hole grid plate SCHUNK 40105326, 40105355, 40105356, 40105357

Instead of the standard clamping yoke (**upon request**), the SCHUNK hole grid plate is used here.



Further information: www.schunk.com
Request installation and operating instructions directly from manufacturer

Hole grid plate installed by pL LEHMANN
(if ordered together with a rotary table)



KSC mini
2-sided, 2-row



KSC 80
1-sided, 1-row



KSC 80
2-sided, 1-row

Possible combinations

PL LEHMANN Item no. Hole grid plate	L [mm]	Clamping system	Description	Number of clamping elements
SCH.510-LRP500	500	KSC mini	1-sided, 1-row	4
	500	KSC mini	1-sided, 2-row	10
	500	KSC mini	2-sided, 1-row	8
	500	KSC mini	2-sided, 2-row	20
	500	KSC 80	1-sided	4
	500	KSC 80	2-sided	8
	500	KSC 125	1-sided, 1-row	3
	500	KSC 125	2-sided 1-row	6
	500	KSM2 400	1-sided, 1-row	max. 5
	500	KSM2 400	1-sided, 2-row	max. 10
	500	KSM2 400	2-sided, 1-row	max. 10
	500	KSM2 400	2-sided, 2-row	max. 20
	600	KSC mini	1-sided, 1-row	6
SCH.510-LRP600	600	KSC mini	1-sided, 2-row	14
	600	KSC mini	2-sided, 1-row	12
	600	KSC mini	2-sided, 2-row	28
	600	KSC 80	1-sided	4
	600	KSC 80	2-sided	8
	600	KSC 125	1-sided, 1-row	3
	600	KSC 125	2-sided 1-row	6
	600	KSM2 500	1-sided, 1-row	max. 6
	600	KSM2 500	1-sided, 2-row	max. 12
	600	KSM2 500	2-sided, 1-row	max. 12
	600	KSM2 500	2-sided, 2-row	max. 24



KSC 125
1-sided, 1-row



KSC 125
2-sided, 1-row



KSM2 400
1-sided, 1-row



KSM2 400
2-sided, 1-row



KSM2 400
1-sided, 2-row



KSM2 400
2-sided, 2-row



Clamping devices assembled by pL LEHMANN,
final adjustment by customer (if ordered together with a rotary table)

Further information: www.schunk.com
Request installation and operating instructions directly from manufacturer

Adapter flanges

	pL LEHMANN Item no.	Fits power clamping blocks	L from spindle [mm]	Weight [kg]	SCHUNK Item No.
x0x/	SCH.5xx-Ada64	① TANDEM3 64	15	0.7	1504986
x1x	SCH.5xx-Ada100	② TANDEM3 100	20	2.4	1504987
x1x	SCH.510-Ada160	③ TANDEM3 160	15	4.8	1504112

Power clamping blocks

pL LEHMANN Item no.	Designation	Size [mm]	L from spindle (with adapter flange, without jaws) [mm]	Hydraulic	Pneumatic	Centered	Fixed jaw	Jaw stroke [mm]	Clamping force [kN] *	Max. pressure [bar]	Max. range with standard jaws ** [mm]	Weight (with adapter flange) [kg]	Max. speed ****[rpm]	Required adapter flange	Additionally required pL LEHMANN rotary union ***	SCHUNK catalog reference
SCH.KSP64	KSP3 64-Z	64 x 64	65.7		●			2	4.5	9	40	1.9	100	①	DDF.5xx-04	1409255
SCH.KSP64F	KSP3-F 64-Z	64 x 64	65.7		●	●	●	4	4.5	9	40	1.9	100	①	DDF.5xx-04	1409335
SCH.KSP100	KSP3 100-Z	100 x 100	89.2	●	●	●		2	18	9	70	6.2	100	②	DDF.5xx-04	1409263
SCH.KSP100LH	KSP3-LH 100-Z	100 x 100	89.2	●	●	●	●	6	8	9	70	6.2	100	②	DDF.5xx-04	1409301
SCH.KSP100F	KSP3-F 100-Z	100 x 100	89.2	●	●	●	●	4	18	9	70	6.2	100	②	DDF.5xx-04	1409343
SCH.KSP160	KSP3 160-Z	160 x 160	97.2	●	●	●	●	3	45	9	120	15.80	100	③	DDF.5xx-04	1409272
SCH.KSP160LH	KSP3-LH 160-Z	160 x 160	97.2	●	●	●	●	8	20	9	120	16.00	100	③	DDF.5xx-04	1409312
SCH.KSP160F	KSP3-F 160-Z	160 x 160	97.2	●	●	●	●	6	45	9	120	15.80	100	③	DDF.5xx-04	1409351
SCH.KSH100	KSH3 100-Z	100 x 100	94.2	●	●	●		2	18	60	70	7	100	②	DDF.5xx-04	1463173
SCH.KSH100LH	KSH3-LH 100-Z	100 x 100	94.2	●	●	●		6	16	120	70	7	100	②	DDF.5xx-04	1463180
SCH.KSH100F	KSH3-F 100-Z	100 x 100	94.2	●	●	●	●	4	18	60	70	7	100	②	DDF.5xx-04	1463178
SCH.KSH160	KSH3 160-Z	160 x 160	102.2	●	●	●		3	45	60	120	18.8	100	③	DDF.5xx-04	1463202
SCH.KSH160LH	KSH3-LH 160-Z	160 x 160	102.2	●	●	●		8	20	120	120	19	100	③	DDF.5xx-04	1463224
SCH.KSH160F	KSH3-F 160-Z	160 x 160	102.2	●	●	●	●	6	45	60	120	18.8	100	③	DDF.5xx-04	1463207

* at max. pressure and / or max. torque

** with standard jaws KTR 64 / 100 / 160 / 250 (machining must be carried out by the customer)

*** see pp. 46/47

**** only indexing allowed

LH version = long stroke
F version = 1 fixed jaw



KSPZ plus 250




SCHUNK clamping unit on SCHUNK VERO-S (p. 83)





Clamping devices assembled by pL LEHMANN, final adjustment by customer (if ordered together with a rotary table)

Further information: www.schunk.com
Request installation and operating instructions directly from manufacturer



NSE3 138-P with two media transfers

Adapter flanges

pL LEHMANN Item no.	Compatible with zero-point clamping systems	L from spindle [mm]	Weight [kg]	SCHUNK Item No.
x0x/xxix SCH.5xx-Ada90	① NSE mini 90	15	1	1505504
x0x/xxix SCH.5xx-Ada138	② NSE3 138	35.7	3.7	1505506
x0x/xxix SCH.5xx-Ada138P	③ NSE3 138 P	35.7	3.7	1505507

Important technical data

	Unit	NSE3 138	NSE +176
Pneumatic system	[mm]	Yes	Yes
Repeat accuracy	[mm]	< 0.005	< 0.005
Actuating pressure	[bar]	6	6
Draw-in force	[kN]	28	40
Retention force M16	[kN]	75	75



Zero point clamping systems

pL LEHMANN Item No.	Designation non-rusting	Pneumatic 6 bar	Turbo function	non-rusting	D [mm]	L from spindle (with adapter flange) [mm]	Clamping force [kN]	Increased draw-in force with turbo function [kN]	Max. retention force [kN]	Weight (with adapter flange) [kg]	Max. speed **[rpm]	Required rotary union*	Required adapter flange	Required rotary union*	SCHUNK catalog reference
SCH.90ix	VERO-S NSE mini 90-V1	● ● ●	ø90	35	0.5	1.5	25	1.8	100	● ●	●	DDF.5xx-04	0435105		
SCH.138ix	VERO-S NSE3 138-V1	● ● ●	ø138	74.7	8	28	75	8.20	100	● ●	●	DDF.5xx-04	1313723		
SCH.138ix-P	VERO-S NSE3 138-V1-P	● ● ●	ø138	74.7	8	28	75	6.7	100	● ●	●	DDF.5xx-04	1359500		

* see pp. 46/47

** only indexing allowed

P = with media passage

Increased accuracy = ½ tolerance values; Item no. NPS.5xx-GEN



Overview & Applications

System, Facts & Service

Q-Line & M-Line
Rotary Tables

SPZ, DDF, RST
GLA, WMS, MOT, KAB

Tolerances
Technology & Glossary

Tooling



Clamping tools installed and aligned by pL LEHMANN
(if ordered together with a rotary table)

Further information: www.gressel.ch
Request installation and operating instructions directly from manufacturer

GRESSEL gredoc pallet system

pL LEHMANN Item No.	Designation	Manual	D1 [mm]	D2 [mm]	L1 [mm]	L2 [mm]	Weight [kg]	Max. speed [rpm]	GRESSEL Item no. incl. adapter flange
x0x GRE.507-GRU*	gredoc round	●	ø135	148		30	—	3.0	NGS.010.015.01
x1x GRE.510-GRU*				148		—	3.0		NGS.010.016.01


Technical data	Unit	Dimensions
Mechanical system		Yes
Repeat accuracy	(mm)	< 0.01
Draw-in force	(kN)	20
Height tolerance	(mm)	± 0.005

Clamping devices for above GRESSEL gredoc pallet system

pL LEHMANN Item No.	Designation	Manual	D [mm]	L from spin- dle [mm]	Pallet sizes [mm]	Workpiece weight (perm.) [kg]	Weight [kg]	Max. speed [rpm]	GRESSEL catalog reference	Base body required
GRE.C280-grip	C2.0 80 L-130 with reversible jaw grip	●	157 x 80 x 78	128		4			CNM.080.001.01	
GRE.C2125-grip	C2.0 125 L-160 with reversible jaw grip	●	208 x 125 x 83	133		8.7			CNM.125.001.01	
GRE.SPZ	gredoc collet, cpl.	●	ø148 x 47.5	97.5	ø148	1.5			NGS.010.030.01	
GRE.LP	Empty pallet, steel	●	ø148 x 30	80	ø148	2.0			NGA.000.002.01	
GRE.LRP	Hole grid pallet, steel	●	ø148 x 30	80	ø148	2.0			NGA.000.003.01	
GRE.NGZ-p	Pyramid 3-way 30° for C3 L-80	●	ø190 x 54 / 30°		ø190	2.6			NGZ.010.135.11	
GRE.C3	C3 L-80 without system jaws	●	70 x 80 x 42			0.9			CGM.070.002.01	
GRE.SWB-grip	SWB grip 3mm width 45 (1 piece)	●	45 x 22 x 22			0.1			CGA.070.001.01	
GRE.NGZ-w	Bracket cube for C2 80	●	260 x 150 x 220			14.6			NGZ.010.060.11	
GRE.AB	Mounting pin, incl. fastening screw	●	ø40			0.1			NGA.000.001.01	

All items must be ordered separately! (Ex. assembly for Lehmann EA-507: NGS.010.015.01 – CGM.080.001.01
NGA.000.001.01)

Possible applications

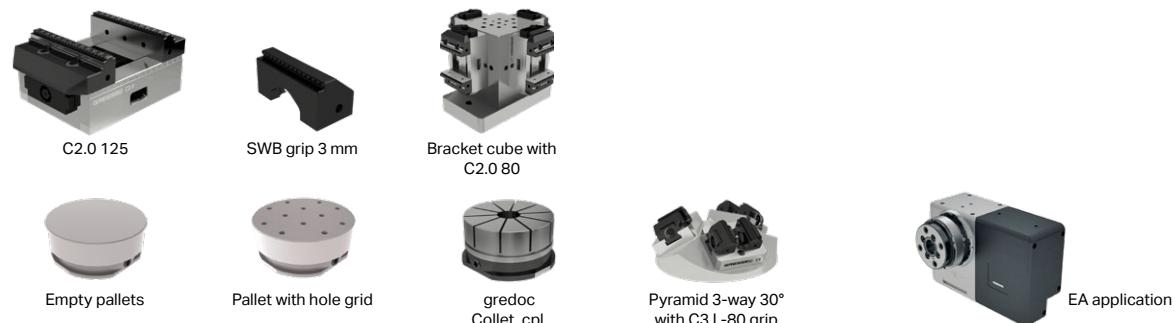




einfach. zukunft. greifen.

Clamping devices assembled by pL LEHMANN,
final adjustment by customer (if ordered together with a rotary table)

Further information: www.lang-technik.de
Request installation and operating instructions directly from manufacturer



LANG zero point clamping system

pL LEHMANN Item no.	Designation	Manual Power- actuated**	Dimensions D x L [mm]	Weight [kg]	Max. speed [rpm]	suitable for LEHMANN SPI	suitable for LANG 5-axis vises*
LAN.5xx-QP52m	Quick-Point® 52, incl. adapter flange	●	Ø 116 x 43	3.60	400	507 / 510 / 520	48085-46 / 48085-77 / 48120-46 / 48120-77 / 48160-77
LAN.5xx-QP52k		●	on request				48085-46 / 48085-77 / 48120-46 / 48120-77 / 48160-77 / 48155-77 / 48155-125
LAN.5xx-QP52 +96m	Quick-Point® 52/96, incl. adapter flange	●	Ø 196 x 37	on request	400	507 / 510 / 510	48085-46 / 48085-77 / 48120-46 / 48120-77 / 48160-77 / 48155-77 / 48155-125
LAN.5xx-QP96m		●	7.60				48155-77 / 48155-125
LAN.5xx-QP96m-D***	Quick-Point® 96, incl. adapter flange	●	Ø 196 x 27	on request	400	507 / 510	48155-77 / 48155-125
LAN.5xx-QP96k		●	Ø 196 x 37				

* The maximum length of the vise base body depends on the rotary axis type. Longer vise variants may be possible. Please inquire.

**Required clamping cylinder: SPZ.5xx-9 / -p or SPZ.520-9 / -p

*** with through hole Ø 46.55 mm



LAN.5xx-QP52m



LAN.5xx-QP96m

Vises suitable for the LANG zero point clamping system



Example of application

Makro-Grip® 125 with Quick-Point® 96, manual on LEHMANN EA-510



Example of application

Makro-Grip® 77 with Quick-Point® 52, power-actuated on LEHMANN EA-510

pL LEHMANN Item no.	Designation	Clamping capacity [mm]	Weight [kg]	Max. speed [rpm]	LANG Item No.	Base body required
LAN.MG46-S85	Makro-Grip® 46, length 102 mm Jaw width 46 mm	0 – 85			48085-46	pL LEHMANN Item No. LAN.5xx-QP52x
LAN.MG46-S120	Makro-Grip® 46, length 130 mm Jaw width 46 mm	0 – 120			48120-46	
LAN.MG77-S85	Makro-Grip® 77, length 102 mm Jaw width 77 mm	0 – 85	2.30	400	48085-77	
LAN.MG77-S120	Makro-Grip® 77, length 130 mm Jaw width 77 mm	0 – 120	2.90	400	48120-77	
LAN.MG77-S160	Makro-Grip® 77, length 170 mm Jaw width 77 mm	0 – 160	3.50	400	48160-77	
LAN.MG77-S155	Makro-Grip® 77, length 160 mm Jaw width 77 mm	0 – 155			48155-77	
LAN.MG125-S155	Makro-Grip® 125, length 160 mm Jaw width 125 mm	0 – 155	8.40	400	48155-125	pL LEHMANN Item No. LAN.5xx-QP96x / LAN.520-QP96x

All LANG vises can also be attached to other zero point clamping systems (Erowa, Schunk, 3R, etc.) after being adjusted slightly. For further information, please contact your local LANG Technik representative.


EROWA®



Clamping devices installed and aligned by pL LEHMANN
(if ordered together with a rotary table)

Further information: www.erowa.com

Request installation and operating instructions directly from manufacturer



PowerChuck P ER-115254

EROWA Item no. = Item number for combined chuck for types 507 and 510

	pL LEHMANN Item No.	Designation (incl. flange)	Manual	Pneumatic	D [mm]	L from spindle [mm]	Pallet sizes [mm]	Workpiece weight (perm.) [kg]	Max. speed [rpm]	Open	Clean Z-support	Rotary union	Chuck weight (incl. adapter flange) [kg]	EROWA catalog reference	EROWA Item no., incl. adapter flange
x0x	ER.507-CTSsix	CTS Chuck Dual Rotation (Inox)	●	●	ø112	45.3	ø60	4	8,000	● ● 1)	4.3	ER-050316	on request		
x0x	ER.5xx-FTSix	FTS Chuck (Inox)	●	●	ø74	46.5	ø72	4	4,000	● ● 1)	1.5	ER-057335	ER-073469		
x0x	ER.5xx-Qcix	QuickChuck 100 P (Inox)	●	●	ø100	50	ø50/ø148	35	3,000		2.6	ER-036345	ER-073351		
x0x	ER.5xx-ITS100ix	ITS Chuck 100 P (Inox)	●	●	ø100	50	ø50/ø148	35	5,000	● ● 1)	2.5	ER-043123	ER-073433		
x0x	ER.5xx-PC	PowerChuck P	●	●	ø150	64.5	ø50/ø148	50	5,000	● ● 1)	7.5	ER-115254	ER-073046		
x0x	ER.5xx-MTS	MTS IntegralChuck S-P/A	●	●	ø130	62	ø148	50	4,500	● ● 1)	4	ER-131210	ER-073457		
x0x	ER.510-CTSsix	CTS Chuck Dual Rotation (Inox)	●	●	ø112	45.3	ø60	4	8,000	2)	4.3	ER-050316	on request		
x0x	ER.5xx-FTSix	FTS Chuck (Inox)	●	●	ø74	46.5	ø72	4	4,000	● ● 2)	1.5	ER-057335	ER-073469		
x1x	ER.5xx-Qcix	QuickChuck 100 P (Inox)	●	●	ø100	50	ø50/ø148	35	3,000		2.6	ER-036345	ER-073351		
x1x	ER.5xx-ITS100ix	ITS Chuck 100 P (Inox)	●	●	ø100	50	ø50/ø148	35	5,000	● ● 2)	2.5	ER-043123	ER-073433		
x1x	ER.5xx-PC	PowerChuck P	●	●	ø150	64.5	ø50/ø148	50	5,000	● ● 2)	7.5	ER-115254	ER-073046		
x1x	ER.5xx-MTS	MTS IntegralChuck S-P/A	●	●	ø130	62	ø148	50	4,500	● ● 2)	4	ER-131210	ER-073457		

Increased accuracy = $\frac{1}{2}$ tolerance values; Item no. NPS.5xx-GEN

for all automatic chucks

ER.O.HSV	Manual control valve	supplied loose with all necessary cables and hoses, ready to connect
ER.O.ASV-2	Automatic control valve	supplied loose, for installation in the control cabinet, with all necessary cables/hoses

Additionally required rotary union (see [pp. 46/47](#)):

1) = DDF.507-04, 2) = DDF.510-04, 3) = DDF.520-04, 4) = DDF.530-04

When standard pallets with open holes are used, water, metal chips etc. can get into the pallet chuck, air lines and control valve. To prevent this, seal kits are available from the respective chuck manufacturers.

The speed values are theoretical, application-specific maximum values. The user is responsible for the optimum radial run-out of the pallets (incl. clamping device and workpiece) as well as sufficient workpiece fastening.



FTS Chuck (Inox)
ER-057335



ITS Chuck 100 P (Inox)
ER-043123



CTS Chuck Rotation (Inox)
ER-057324



MTS IntegralChuck S-P/A
ER-131210



Manual control valve
(option)





Automatic control unit
with monitoring (option)

system 3R

Clamping devices installed and aligned by pL LEHMANN
(if ordered together with a rotary table)

For more information, please visit: www.system3r.com
Request installation and operating instructions directly from manufacturer

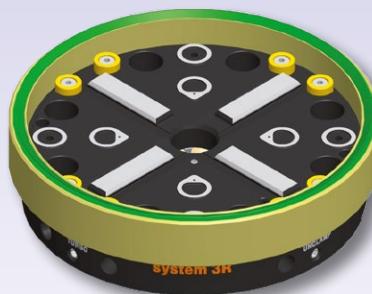

S3R.5xx = Item number for combined chuck for types 507 and 510

	pL LEHMANN Item No.	Designation (incl. flange)	Pneumatic	D [mm]	L from spindle [mm]	Pallet sizes [mm]	Workpiece weight (perm.)	Weight [kg]	Max. speed [rpm]	Open	Clean Z-support	Clean cams	Incr. clamping force/venting	Rotary union	SYSTEM 3R Catalog reference	SYSTEM 3R item no. incl. adapter flange
Ref. Pallette	x0x	S3R.5xx-G70	3R GPS 70	● ø99	56	ø70	10	2.70	5,450	● ●				1)	C198700	X663000
	x1x	S3R.5xx-G70	3R GPS 70	● ø99	56	ø70	10	2.70	5,450	● ●				2)	C198700	X663000
		S3R.510-G120	3R GPS 120	● ø118	56	ø120	20	3.60	5,450	● ●				2)	C188770	X663010
		S3R.510-MGC*	3R Magnum Chuck	● ø162	46	ø156, w/index pin	100	6.70	5,450	● ●	●	●	●	2)	3R-SP26712	90940.02
		S3R.510-MCC	3R Macro Chuck	● ø100	49	54x54, 70x70	10	2.60	5,450	● ●	●	●	●	2)	3R-600.14-30	90940.01
		S3R.RP-GPS240	Reference pallet GPS 240												C846600	
		S3R.RP-GPS70120	Reference pallet GPS 70												C846360	
		S3R.RP-Macro	Reference pallet Macro												36-606.1	
		S3R.RP-Magnum	Reference pallet Magnum												3R-686.1-HD	

Additionally required rotary union (see pp. 46/47):
1) = DDF.507-04, 2) = DDF.510-04

* For Magnum pallets only.
Macro pallets may not be clamped

When standard pallets with open holes are used, water, metal chips etc. can get into the pallet chuck, air lines and control valve. To prevent this, seal kits are available from the respective chuck manufacturers.

Increased accuracy = $\frac{1}{2}$ tolerance values; Item no. NPS.5xx-GEN

- Repeatability 2 μ
- Angular position accuracy 0.005 mm

GPS 70/120/240

- Cast aluminum design at very good price-performance ratio
- Compact in overall height
- No clamping spigots
- Complete coverage for die-sinking and milling applications
- Ideal for automation
- High precision repeatability

Macro


- High stability and precision
- Especially for milling applications

Macro Magnum

- Solid construction
- High stability and precision
- Complete tightness
- Especially for milling applications in the high-precision range

Dynafix

- High holding and pull-in forces
- Extremely precise steel ground 0-point supports
- Mainly milling and sink erosion applications



GPS 70



GPS 120

Macro

Macro Magnum

Clamping tools assembled by pL LEHMANN,
final adjustment by customer (if ordered together with a rotary table)

Further information: www.parotec.ch
Request installation and operating instructions directly from manufacturer

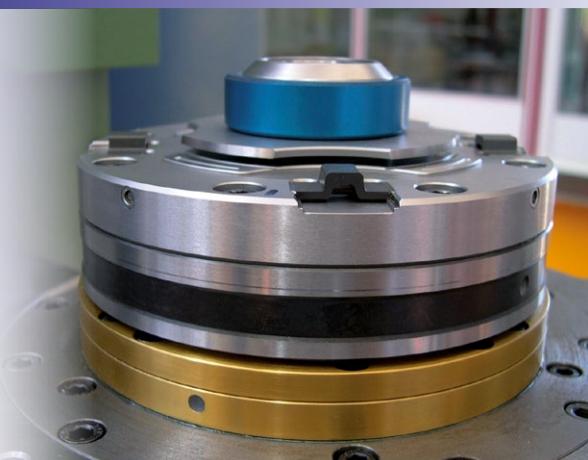

		bL LEHMANN Item No.	Designation	Manual	Pneumatic	Hydraulic	D [mm]	L from spindle [mm] (up to Z-support)	Pallet sizes [mm]	Number of media transfers* [kg]	Max. workpiece weight [kg]	Weight [kg]	Max. speed [rpm]	Open system [bar]	Clean Z-support	With re-tightening	Required rotary union*	PAROTEC Item no., Incl. adapter flange
	x0x	PAR.507-PG162p	POWER GRIP 160, 1x	●	Ø162	69	□158/ Ø148	0	250	9.6	6,000	6	● ●	DDF.507-04	XT2160142007			
		PAR.507-PG162mp	POWER GRIP 160, 1x (LPA)	●	Ø162	69	□158/ Ø148	0	250	9.9	6,000	6	● ●	DDF.507-04	XT2160142008			
		PAR.507-PG162h	POWER GRIP 160, 1x	●	Ø162	69	□158/ Ø148	0	750	9.9	6,000	30	● ●	DDF.507-04	XT2160142707			
	x1x	PAR.507-PY162p	POLY GRIP, 1x	●	Ø162	69/76.5	Ø70-Ø148	0	50				6	● ●	DDF.507-04	XT9911420707		
		PAR.507-PY162mp	POLY GRIP, 1x (LPA)	●	Ø162	69/76.5	Ø70-Ø148	0	50				6	● ●	DDF.507-04	XT9911420708		
		PAR.510-PG162p	POWER GRIP 160, 1x	●	Ø162	69	□158/ Ø148	0	250	9.5	6,000	6	● ●	DDF.510-04	XT2160162010			
		PAR.510-PG162mp	POWER GRIP 160, 1x (LPA)	●	Ø162	69	□158/ Ø148	0	250	9.5	6,000	6	● ●	DDF.510-04	XT2160162011			
		PAR.510-PG162p-P	POWER GRIP 160, 1x	●	Ø162	69	□158/ Ø148	3	250	9.6	6,000	6	● ●	DDF.510-06	XT2160162013			
		PAR.510-PG162h	POWER GRIP 160, 1x	●	Ø162	69	□158/ Ø148	0	750	9.5	6,000	30	● ●	DDF.510-04	XT2160162710			
		PAR.510-PG162h-P	POWER GRIP 160, 1x	●	Ø162	69	□158/ Ø148	3	750	9.6	6,000	30	● ●	DDF.510-06	XT2160162713			
		PAR.510-PY162p	POLY GRIP, 1x	●	Ø162	69/76.5	Ø70-Ø148	0	50				6	● ●	DDF.510-04	XT9911420710		
		PAR.510-PY162mp	POLY GRIP, 1x (LPA)	●	Ø162	69/76.5	Ø70-Ø148	0	50				6	● ●	DDF.510-04	XT9911420711		

* see pp. 46/47

** up to 200 bar

LPA = air gun connection

Technical data	Unit	POWER GRIP	POLY GRIP
Repeat accuracy	mm	±0.002	±0.002
Clamping force without re-tightening PNEU	kN	17	7
Clamping force with re-tightening PNEU	kN	28	12
Clamping force without re-tightening HYDR	kN	35	
Clamping force with re-tightening HYDR	kN	45	
Permissible tilting moment without re-tightening PNEU 6 bar	Nm	429	160 / 210*
Permissible tilting moment without re-tightening HYDR 30 bar	Nm	890	

* 2 possible Z-supports. More details on request.



POWER GRIP 160, 1x on EA-507



POWER GRIP 160, 1x on EA-510




Clamping devices assembled by pL LEHMANN,
final adjustment by customer (if ordered together with a rotary table)

Further information at: www.evard-precision.ch
Request installation and operating instructions directly from manufacturer



Polymut Monoblock towers

	pL LEHMANN Item No.	Designation	Size [mm]	Total length [mm]	Length of gearing [mm]	Weight [kg]	Evard item no., incl. adapter flange
x0x	EVA.507-350-T50	Polymut monoblock tower incl. flange set	50	368	318	16	T50350507
	EVA.507-450-T50	Polymut monoblock tower incl. flange set	50	468	418	19	T50450507
x1x	EVA.510-500-T50	Polymut monoblock tower incl. flange set	50	503	453	24	T50500510
	EVA.510-600-T50	Polymut monoblock tower incl. flange set	50	603	553	28	T50600510
x1x	EVA.510-500-T80	Polymut monoblock tower incl. flange set	80	503	423	45	T80500510
	EVA.510-600-T80	Polymut monoblock tower incl. flange set	80	603	523	53	T80600510

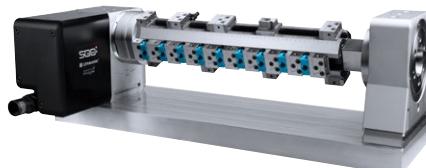

Rotary table EA-510.L with Polymut 50/500
Compatible with pL LEHMANN rotoFIX base plate.

Simultaneously produce up to 32 workpieces 25 mm wide with a precision and repeat accuracy of +/- 0.01 mm. The modular Polymut system will meet all of your requirements regarding workpiece clamping.

- Accuracy ± 0.01 over all clamps
- Tight & protected guides
- Very stiff, because guide is directly integrated into jaw
- Narrower jaws, thus more workpieces per 100 mm compared to other manufacturers

Fixed and clamping jaws

	pL LEHMANN Item No.	Designation	Size [mm]	Width [mm]	Weight [kg]	Required accessories	Evard item no.
Polymut 50	EVA.50160	Basic jaw, narrow	50	20	0.310	–	50160
	EVA.50161	Clamping jaw, narrow	50	20	0.360	–	50161
	EVA.4101	Base jaw, stepped, Type A	50	49	0.226	–	4101
	EVA.4121	Base jaw, deep stepped, Type B	50	49	0.230	–	4121
	EVA.50105	Base jaw, no step, Type C	50	49	0.340	–	50105
	EVA.4102	Clamping jaw, stepped, Type A	50	49	0.373	–	4102
	EVA.4109	Clamping jaw, deep stepped, Type B	50	49	0.373	–	4109
	EVA.50101	Clamping jaw, no step, Type C	50	49	0.373	–	50101
	EVA.4111	Base jaw, stepped, Type A	80	78	0.880	–	4111
	EVA.4120	Base jaw, deep stepped, Type B	80	78	0.900	–	4120
	EVA.80107	Base jaw, no step, Type C	80	78	1.330	–	80107
	EVA.4110	Clamping jaw, stepped, Type A	80	78	1.446	–	4110
	EVA.4119	Clamping jaw, deep stepped, Type B	80	78	1.430	–	4119
	EVA.80101	Clamping jaw, no step, Type C	80	78	1.475	–	80101
	EVA.105001	Base jaw, stepped, Type A	80	105	2.050	–	105001
	EVA.105005	Base jaw, deep stepped, Type B	80	105	2.070	–	105005
	EVA.105007	Base jaw, no step, Type C	80	105	2.100	–	105007
	EVA.105002	Clamping jaw, stepped, Type A	80	105	2.650	–	105002
	EVA.105006	Clamping jaw, deep stepped, Type B	80	105	2.575	–	105006
	EVA.105008	Clamping jaw, no step, Type C	80	105	2.540	–	105008
	EVA.120001	Base jaw, stepped, Type A	80	120	2.300	–	120001
	EVA.120005	Base jaw, deep stepped, Type B	80	120	2.200	–	120005
	EVA.120007	Base jaw, no step, Type C	80	120	2.400	–	120007
	EVA.120002	Clamping jaw, stepped, Type A	80	120	2.980	–	120002
	EVA.120006	Clamping jaw, deep stepped, Type B	80	120	2.890	–	120006
	EVA.120008	Clamping jaw, no step, Type C	80	120	2.830	–	120008



EVARD
PRECISION
S.A.

Clamping devices assembled by pL LEHMANN, final adjustment by customer (if ordered together with a rotary table)

Further information at: www.evard-precision.ch
Request installation and operating instructions directly from manufacturer



Centering vise – Type CM

pL LEHMANN Item No.	Designation	Manual	Pneumatic	Size [mm]	Clamping capacity [mm]	Weight [kg]	Evard catalog Reference	Evard item no., incl. adapter flange
EVA.5xx-2020	CM centering vise	●		20	25	0.22	2020	2020507
EVA.5xx-2021	CM stainless steel centering vise	●		20	25	0.22	2021	2021507
EVA.5xx-3000	CM centering vise	●		30	56	0.66	3000	3000507
EVA.5xx-3001	CM stainless steel centering vise	●		30	56	0.66	3001	3001507
EVA.5xx-5000	CM centering vise	●		50	89	2.30	5000	5000510
EVA.5xx-8000	CM centering vise	●		80	137	6.45	8000	8000510




Combine the EA-507 rotary table with the CM 20 centering vise and split the µ's.

Jaws

pL LEHMANN Item No.	Designation	Size [mm]	Weight [kg]	Required accessories	Evard item no.
EVA.500053	Standard jaw	50	Included in the weight of the vise	–	500053
EVA.500051	Stepped jaw	50	Included in the weight of the vise	–	500051
EVA.500052	Claw jaw	50	Included in the weight of the vise	–	500052
EVA.500055	Special claw jaw	50	Included in the weight of the vise	–	500055
EVA.800053	Standard jaw	80	Included in the weight of the vise	–	800053
EVA.800051	Stepped jaw	80	Included in the weight of the vise	–	800051
EVA.800052	Claw jaw	80	Included in the weight of the vise	–	800052
EVA.800055	Special claw jaw	80	Included in the weight of the vise	–	800055
EVA.105053	Standard jaw	105	Included in the weight of the vise	–	105053
EVA.105051	Stepped jaw	105	Included in the weight of the vise	–	105051
EVA.105052	Claw jaw	105	Included in the weight of the vise	–	105052
EVA.105055	Special claw jaw	105	Included in the weight of the vise	–	105055

Adapter plate for CM 50 on Polymut

pL LEHMANN Item No.	Designation	Size of the CM [mm]	Size of the Polymut [mm]	Required accessories	Evard item no.
EVA.500054	Adapter plate for CM 50 on Polymut 80	50	80	See Monoblock tower	500054
EVA.500057	Adapter plate for CM 50 on Polymut 50	50	50	See Monoblock tower	500057

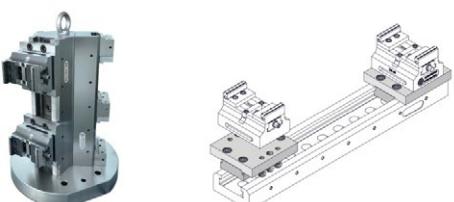



Clamping devices installed and aligned by pL LEHMANN (if ordered together with a rotary table)

Further information at: www.triag-int.ch
Request installation and operating instructions directly from manufacturer


Clamping bars

	pL LEHMANN Item No.	Usable length L [mm]	Cube [mm]	Interference circle* Ø [mm]	Weight [kg]	Max. speed [rpm]	Counterbearing **	Base plate	TRIAG Item no.
x0x	TRI.507-350	350	110x110	156	34		GLA.TOP1-110	RFX.507-GP350s-TOP	PCT110-350-507-PL
x0x	TRI.507-450	450	110x110	156	43		GLA.TOP1-110	RFX.507-GP450s-TOP	PCT110-450-507-PL
x1x	TRI.510-500	500	110x110	156	45		GLA.TOP2-150	RFX.510-GP500s-TOP	PCT110-500-510-PL
x1x	TRI.510-600	600	110x110	156	54		GLA.TOP2-150	RFX.510-GP600s-TOP	PCT110-600-510-PL


* without jaws

** must always be ordered from pL

- Weight for clamping bar and adapter flanges only (without rotary table, counterbearing and common base plate).
- For more information about base plates and counterbearings, our sales team is happy to help, see **p. 42**



EA-507 for GLA.TOP1-110 and RFX.507-GPxxx-TOP



EA-510 for GLA.TOP2-150 and RFX.510-GPxxx-TOP



EA-510 with pneumatic centric clamping unit



EA-510 rotoFIX with TRIAG clamping tower 4-sided

Clamping yokes

	pL LEHMANN Item No.	Usable length L [mm]	Dimensions L x W x H [mm]	Weight [kg]	Max. speed [rpm]	Mounting set	Counterbearing *	Base plate
x0x	TRI.507-SB350	350	350 x 165 x 20			RFX.507-ASa	GLA.TOP1-110	RFX.507-GP350s-TOP
x1x	TRI.510-SB500	500	500 x 215 x 35			RFX.510-ASa	GLA.TOP2-150	RFX.510-GP500s-TOP
x1x	TRI.510-SB600	600	600 x 215 x 35				GLA.TOP2-150	RFX.510-GP600s-TOP

* must always be ordered from pL

- Weight for clamping bar and adapter flanges only (without rotary table, counterbearing and common base plate).
- For more information about base plates and counterbearings, our sales team is happy to help, see **p. 42**



EA-510 rotoFIX with clamping yoke pL 500 mm and mounted TRIAG rails




Ultra-compact
self-centering vice –
only 50 mm above spindle



Clamping devices assembled by pL LEHMANN,
final adjustment by customer (if ordered together with a rotary table)

Manufacturer for adaptation to pL rotary table: www.ivo-oesterle.de
Manufacturer for all other add-on elements: www.triag-int.ch

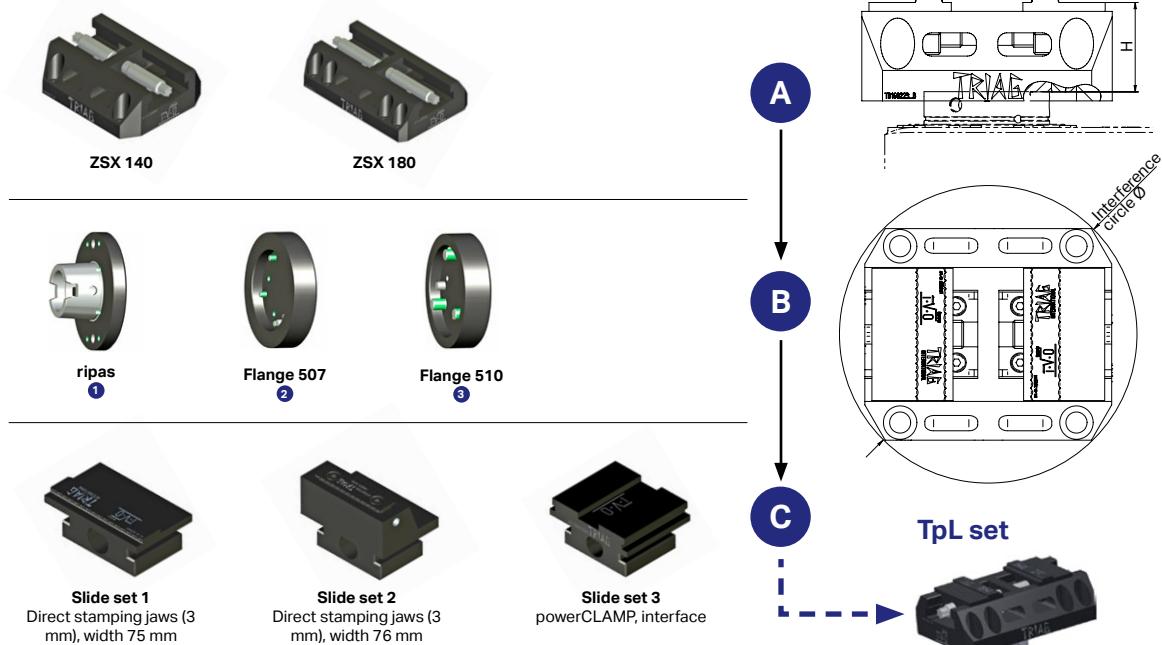

A Centric clamping unit

pL LEHMANN Item No.	Designation	L from flange [mm]	Interference circle Ø [mm]	Weight, approx. (without adapter flange) [kg]	Max. speed [rpm]	Required adapter flange	TRIAG item no.
TRI.ZSX-140	ZSX 140 (140 x 120 x 50)	32.5	184	3	400	① / ② / ③	ZSX140L50-PL
TRI.ZSX-180	ZSX 180 (180 x 120 x 50)		216	4.2			ZSX180L50-PL

B Hollow shank taper adapter and flange

pL LEHMANN Item no.	Compatible with centric clamping units	L from spindle [mm]	Weight [kg]	Required*	TRIAG item no.
HSK TRI.HSK ①	ZSX 140 / ZSX 180	12.5	0.9	RIP.5xx-63x	FLZSX-HSK63-PL
x0x TRI.507 ②	ZSX 140 / ZSX 180	12.5	1		FLZSX-507-PL
x1x TRI.510 ③	ZSX 140 / ZSX 180	15	1.2		FLZSX-510-PL

* see p. 67

C Suitable jaw set

pL LEHMANN Item No.	Designation	Weight [kg]	TRIAG item no.
ZSX 140/180 TRI.ZB5X	Slide set 1 direct stamping jaws (3 mm), width 75 mm	1	ZB5XPRG
ZSX 140/180 TRI.ZB5U	Slide set 2 direct stamping jaws (3 mm), width 76 mm	2	ZB5UPRG
ZSX 140/180 TRI.ZBM	Slide set 3 powerCLAMP, interface	1.8	ZBM

TRIAG

INTERNATIONAL

Clamping devices assembled by pL LEHMANN, final adjustment by customer (if ordered together with a rotary table)

Further information at: www.triag-int.ch
Request installation and operating instructions directly from manufacturer

Pneumatic centric clamping unit

pL LEHMANN Item No.	Designation	Size [mm]	L from spindle (with adapter flange, without jaws) [mm]	Pneumatic	Jaw stroke [mm]	Clamping force [kN] *	Max. pressure [bar]	Max. range with standard jaws ** [mm]	Weight (with adapter flange) [kg]	Max. speed *** [rpm]	Additionally required pL LEHMANN rotary union **	TRIAG Item no.
x0x/x1x TRI.5xx-ZSP150	Centric clamping unit	150 x 150	105	●	6	24	12	124.5	13.5	400	DDF.5xx-04	ZSP150L100-510-PL

* at max. pressure and / or max. torque

** see p. 46/47




*** only indexing allowed

5-axis centric clamping block

pL LEHMANN Item No.	Designation	Size [mm]	L from spindle (with adapter flange and clamp, without jaws) [mm]	Manual	Weight (with adapter flange) [kg]	Max. speed* [rpm]	Additionally required pL LEHMANN accessories **	TRIAG Item no.
HSK TRI.5xx-CENHSK	5-axis centric clamping block	120 x 120	162		7.7	0	RIP.5xx-63x	FLZSX-HSK63-PL UB5AX-MCZ40-45-4 ZF230540
QuickPoint TRI.5xx-CENQP			149	●	7	0	LAN.5xx-QP96x	UB5AX-MCZ40-45-4 ZF230540

* only indexing allowed

** see p. 67



Overview & Applications

System, Facts & Service

Q-Line & M-Line
Rotary Tables

SPZ, DDF, RST
GLA, WMS, MOT, KAB

Tolerances
Technology & Glossary

Tooling



Installed by pL LEHMANN (if ordered together with a rotary table)

Further information at: www.roehm.biz
Request installation and operating instructions directly from manufacturer




Face driver, play-free version with hydraulic compensation for clockwise and counterclockwise rotation


pL LEHMANN Item No.	Designation	Overhang [mm]	Max. workpiece weight [kg]	Max. axial load [kN]	Weight [kg]	Max. speed [rpm]	RÖHM item no. incl. adapter flange
x1x RÖH.507-SM	Face driver	65	100	20			1340449
x1x RÖH.510-SM	Face driver	65	100	20			1340450

Accessories: Driver plates / play-free / clockwise and counterclockwise rotation

pL LEHMANN Item No.	Designation	S Clamping circle Ø	Associated center Ø	R Overhang [mm]	I [mm]	V [mm]	Weight [kg]	RÖHM item no.
RÖH.MS-DV08	Driver plate	8	4	38	4.5	4		1209000
RÖH.MS-DV10	Driver plate	10	4	38	4.5	4		1209001
RÖH.MS-DV12	Driver plate	12	6	36	7	4		1209002
RÖH.MS-DV16	Driver plate	16	10	33	11	4		1209003
RÖH.MS-DV20	Driver plate	20	12	30	13	4		1209004
RÖH.MS-DV25	Driver plate	25	16	30	17	8		1209005
RÖH.MS-DV32	Driver plate	32	16	30	22	10		1209006
RÖH.MS-HM20	Driver plate	20	6	30	7	8		1209007
RÖH.MS-HM25	Driver plate	25	10	30	11	8		1209008
RÖH.MS-HM32	Driver plate	32	16	30	17.5	10		1209009
RÖH.MS-HM40	Driver plate	40	16	30	27	16		1209010
RÖH.MS-HM50	Driver plate	50	16	30	36			1209011
RÖH.MS-HM63	Driver plate	63	16	30	49			1209012
RÖH.MS-HM80	Driver plate	80	16	30	66			1209013



Driver plate directly geared
1209000



Driver plate 3x select.
metal carbide plates 6 x 3.2
1209007

Accessories: Metal carbide driver plates, clockwise and counterclockwise rotation


pL LEHMANN Item No.	Designation	Clamping circle Ø	Size	Weight [kg]	RÖHM item no.
RÖH.HMP-20	Metal carbide plate	20-32	6 x 3.2		88970
RÖH.HMP-40	Metal carbide plate	40-80	9.5 x 3.2		87931



Metal carbide driver plates 088970

Accessories: Centering tip

pL LEHMANN Item No.	Designation	Clamping circle Ø	Y Center Ø	N1 [mm]	Weight [kg]	RÖHM item no.
RÖH.ZS-08	Centering tip	8-10	4	90		1209016
RÖH.ZS-12	Centering tip	12	6	90		1209017
RÖH.ZS-16	Centering tip	16	10	90		1209018
RÖH.ZS-20	Centering tip	20	12	90		1209019
RÖH.ZS-25	Centering tip	25-80	16	90		1209020



Centering tip CoAE 1209016



Supplied loose by pl LEHMANN


Further information at: www.roehm.biz

Request installation and operating instructions directly from manufacturer



Revolving centers


pl LEHMANN Item No.	Designation	Mount MK	Max. run-out deviation [mm]	Max. workpiece weight [kg]	Max. radial load [daN]	Max. speed [rpm]	D Moving tip Ø [mm]	B Housing Ø [mm]	A [mm]	G [mm]	K [mm]	Weight [kg]	RÖHM item no.
RÖH.ZS-DAMK3	with pressure display and length compensation; spring-loaded tip - spring travel max. 1.6 mm at axial clamping force of 550 daN; body hardened and ground - tip angle 60°	3	0.01	400	200	4000	25	64	105	23.8	31		60798
RÖH.ZS-SAMK2	Standard version; body hardened and ground; tip angle 60°	2	0.005	200	100	7000	20	43	65	17.8	24		43115
RÖH.ZS-SAMK3	Standard version; body hardened and ground; tip angle 60°	3	0.005	400	200	6300	22	48.5	70.5	23.8	27		42315
RÖH.ZS-GDMK2	with small housing diameter, body hardened and ground; tip angle 60°	2	0.005	200	100	7000	15	32	62	17.8	19.5		5336
RÖH.ZS-GDMK3	with small housing diameter, body hardened and ground; tip angle 60°	3	0.005	400	200	7000	15	34	62	23.8	19.5		5429



Mikö 60798



Mikö 43115 / 42315





Mikö 5336 / 5429

ROTO MATION transferBox

- Plug & play indoor automation
 - For unmanned 6-side machining with integrated part changer
 - Workpiece storage with quick-change system
 - Installed/uninstalled on machine within minutes (with zero-point clamping)

Blow off finished workpiece

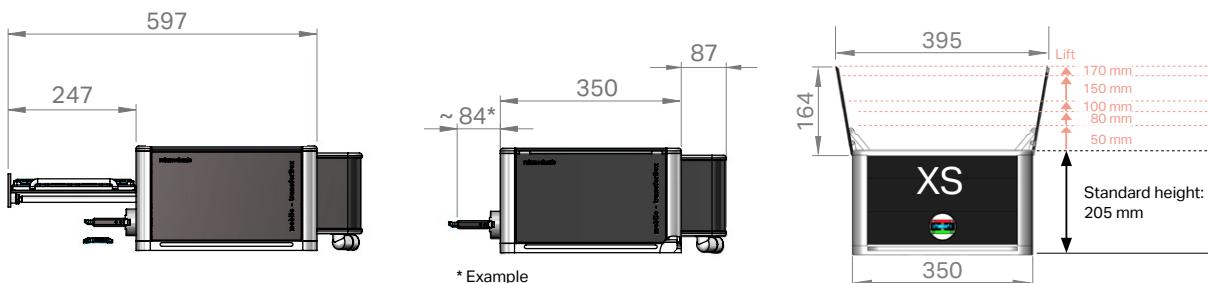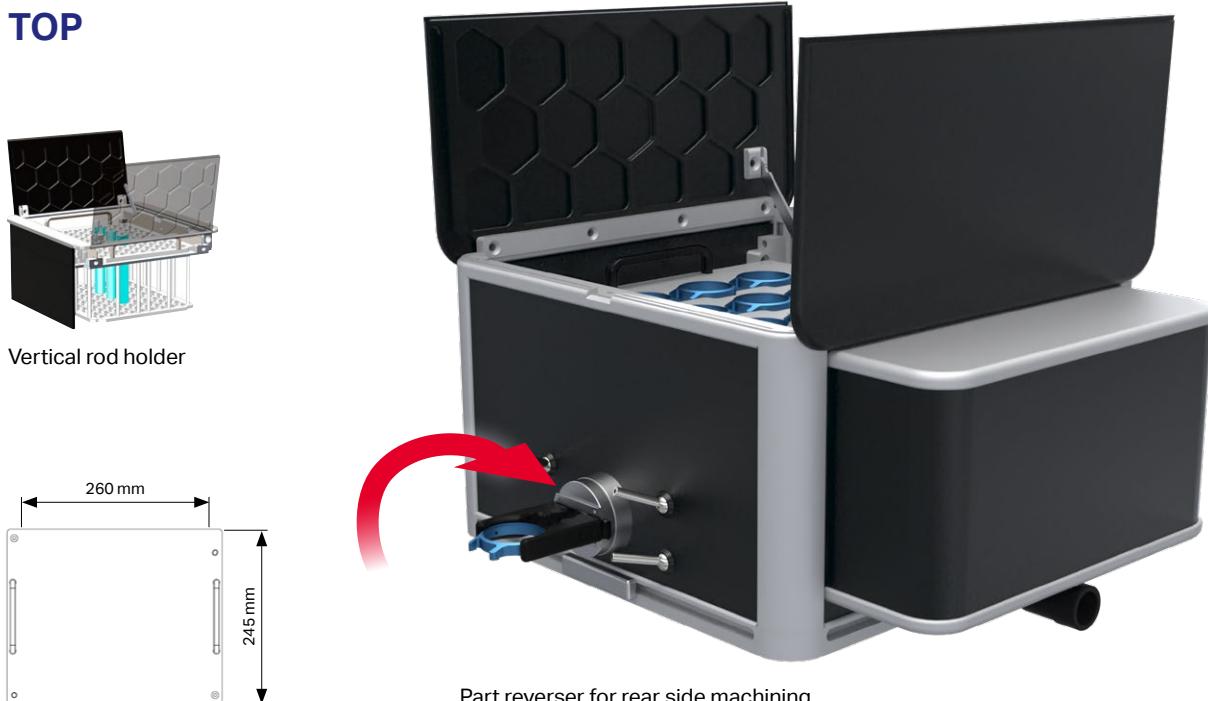


Ideal for existing and new vertical machining centers

Turn nighttime into production time


«From real-world applications – for real-world applications»

Deposit finished workpiece

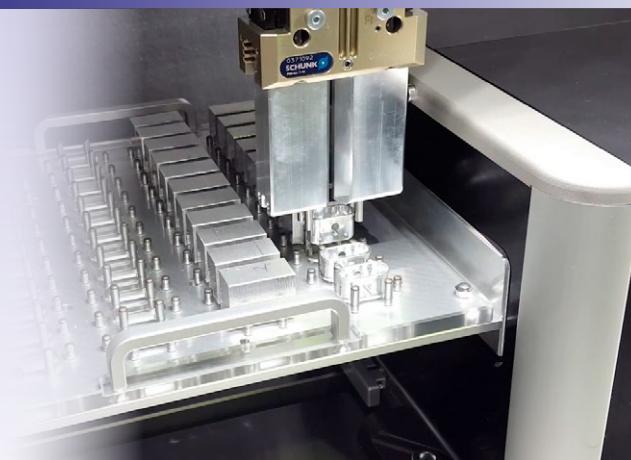

SLIDE

(here, SLIDE-2)

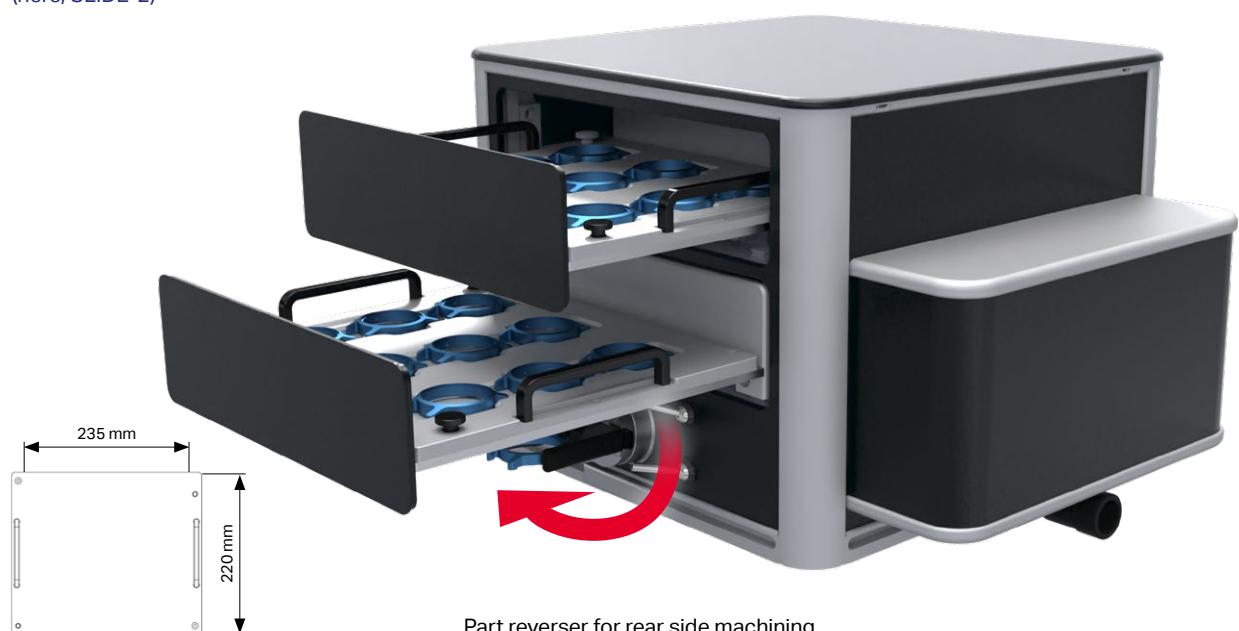

Workpiece carrier SLIDE
Usable height: max. 49 mm

**After just a
few minutes ...
Ready to
produce!**


Position box
and
plug it in

Load
workpieces

Start program



Zero-point positioning



Interesting expansion



4th axis,
one spindle



4th/5th axis

Overview &
Applications

System,
Facts & Service

Q-Line & M-Line
Rotary Tables

SPZ, DDF, RST
GLA, WMS, MOT, KAB

Tolerances
Technology & Glossary

Tooling



ROTARY SOLUTIONS > MACHINE TOOLS & METROLOGY

Headquarters

PETER LEHMANN AG
Bäraustrasse 43
CH-3552 Bärau
Phone +41 (0)34 409 66 66
Fax +41 (0)34 409 66 00
sales@plehmann.com
www.lehmann-rotary-tables.com

Global network

Europe

– Austria
– Benelux
– Bosnia
– Bulgaria
– Croatia
– Czech Republic
– Denmark
– Estonia
– Finland
– France
– Germany
– Hungary
– Iceland
– Ireland
– Italy
– Kosovo

– Latvia
– Lithuania
– Macedonia
– Norway
– Poland
– Portugal
– Romania
– Russia
– Serbia
– Slovakia
– Slovenia
– Spain
– Sweden
– Turkey
– UK

America
– Brazil
– Canada
– Mexico
– USA

Asia
– China
– India
– Israel
– Japan
– Malaysia
– Singapore
– South Korea
– Taiwan
– Thailand
– Vietnam



● Headquarters

● direct sales

● pL SOLUTIONS® partner

● value added reseller & partner

More information (address, telephone number, etc.) at www.lehmann-rotary-tables.com